





























Features

- · Constant Voltage + Constant Current mode output
- Metal housing with class | design
- · Built-in active PFC function
- IP67 / IP65 rating for indoor or outdoor installations
- · Function options: output adjustable via potentiometer; 3 in 1 dimming; Timer dimming
- Typical lifetime > 62000 hours
- 7 years warranty

Applications

- LED street lighting
- LED high-bay lighting
- · Parking space lighting
- · LED fishing lamp
- · LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.


GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

HLG-120H series is a 120W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-120H operates from 90 ~ 305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 93.5%, with the fanless design, the entire series is able to operate for -40°C ~ +80°C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-120H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

Model Encoding

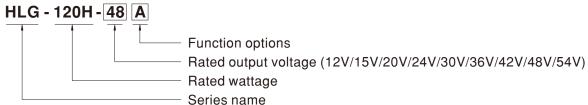

Type	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
Α	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
AB	IP65	Io and Vo adjustable through built-in potentiometer & 3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request


SPECIFICATION

	HLG-120H-12	HLG-120H-15	HLG-120H-20	HLG-120H-24	HLG-120H-30	HLG-120H-36	HLG-120H-42	HLG-120H-48	HLG-120H-54
DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
CONSTANT CURRENT REGION Note.4	6~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V
RATED CURRENT	10A	8A	6A	5A	4A	3.4A	2.9A	2.5A	2.3A
RATED POWER	120W	120W	120W	120W	120W	122.4W	121.8W	120W	124.2W
RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p
VOLTAGE AD L PANGE	Adjustable for	A/AB-Type o	nly (via built-ir	potentiomete	er)				_
VOLIAGE ADS. NAMOL	10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V
CURRENT AD L RANGE	Adjustable for A/AB-Type only (via built-in potentiometer)								
OUNTERN ADV. NAMOL	5 ~ 10A	4 ~ 8A	3 ~ 6A	2.5 ~ 5A	2 ~ 4A	1.7 ~ 3.4A	1.4 ~ 2.9A	1.2 ~ 2.5A	1.1 ~ 2.3A
VOLTAGE TOLERANCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
LOAD REGULATION	±2.0%	±1.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
SETUP, RISE TIME Note.6	1200ms,50ms	s/115VAC 5	00ms,50ms/2	30VAC					
HOLD UP TIME (Typ.)	12ms / 115VA	C, 230VAC							
VOLTAGE RANGE Note 5	90 ~ 305VAC								
VOLIAGE NAME.	(Please refer to "STATIC CHARACTERISTIC" section)								
FREQUENCY RANGE	47 ~ 63Hz								
POWER FACTOR (Typ.)	PF≥0.98/115VAC, PF≥0.95/230VAC, PF≥0.93/277VAC @ full load								
TOWERTAGIOR (Typ.)									
TOTAL HARMONIC DISTORTION	THD< 20% (@	@ load≧50% .	/ 115VAC,230	VAC; @ load≧	≧75% / 277VA	C)			
TO TAE TIARMIONIO DIOTORTION	(Please refer	to "TOTAL HA	ARMONIC DIS	TORTION (TH	ID)" section)				
EFFICIENCY (Typ.)	92%	92%	93%	93%	93%	93%	93%	93.5%	93.5%
AC CURRENT (Typ.)	1.4A / 115VAC	0.6A/2	30VAC 0.	55A / 277VAC					
INRUSH CURRENT (Typ.)	COLD START	60A(twidth=375	us measured a	t 50% Ipeak) at 2	230VAC; Per NE	EMA 410			
MAX. No. of PSUs on 16A CIRCUIT BREAKER	5 units (circuit breaker of type B) / 9 units (circuit breaker of type C) at 230VAC								
LEAKAGE CURRENT	<0.75mA / 27	7VAC							
AVED AUDDENT	95 ~ 108%								
OVER CURRENT									
SHORT CIRCUIT									
	14 ~ 17V	18 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 63V	59 ~ 65V
OVER VOLTAGE	Shut down o/p	voltage with a	auto-recovery o	or re-power on	to recovery				
OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down								
WORKING TEMP.	Tcase= -40 ~	+80°C (Please	e refer to "OU"	ΓPUT LOAD vs	TEMPERATU	IRE" section)			
MAX. CASE TEMP.	Tcase= +80°C	<u>;</u>				·			
WORKING HUMIDITY	20 ~ 95% RH non-condensing								
SAFETY STANDARDS Note.8	UL8750(type"HL"), CSA C22.2 No. 250.0-08, BS EN/EN 61347-1, BS EN/EN 61347-2-13, AS/NZS 61347-1(except for AB-type),						(except for E		
WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC								
ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH								
EMC EMISSION Note.8	Compliance to BS EN/EN55015_RS EN/EN55032_Class R_BS EN/EN61000-3-2_Class C (@ load≥50%) - BS EN/EN61000-3-3								
EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN61547, BS EN/EN55024, light industry level (surge immunity Line-Earth 4KV, Line-Line 2KV),EAC TP TC 020								
MTBF	2185.8K hrs m	in. Telcordia S	R-332 (Bellcor	e); 167.1Khrs	min. MIL-HI	DBK-217F (25	°C)		
			,	,,		,	,		
DIMENSION	220*68*38.8m	ım (L*W*H)							
	CONSTANT CURRENT REGION Note.4 RATED CURRENT RATED POWER RIPPLE & NOISE (max.) Note.2 VOLTAGE ADJ. RANGE CURRENT ADJ. RANGE VOLTAGE TOLERANCE Note.3 LINE REGULATION LOAD REGULATION SETUP, RISE TIME Note.6 HOLD UP TIME (Typ.) VOLTAGE RANGE Note.5 FREQUENCY RANGE POWER FACTOR (Typ.) TOTAL HARMONIC DISTORTION EFFICIENCY (Typ.) AC CURRENT (Typ.) INRUSH CURRENT (Typ.) INRUSH CURRENT (Typ.) MAX. No. of PSUS on 16A CIRCUIT BREAKER LEAKAGE CURRENT OVER CURRENT SHORT CIRCUIT OVER VOLTAGE OVER TEMPERATURE WORKING TEMP. MAX. CASE TEMP. WORKING HUMIDITY TEMP. COEFFICIENT VIBRATION SAFETY STANDARDS Note.8 WITHSTAND VOLTAGE ISOLATION RESISTANCE EMC EMISSION Note.8	CONSTANT CURRENT REGION Note.4 RATED CURRENT RATED POWER RIPPLE & NOISE (max.) Note.2 VOLTAGE ADJ. RANGE CURRENT OLERANCE Note.3 LINE REGULATION LOAD REGULATION SETUP, RISE TIME NOTE.5 FREQUENCY RANGE FREQUENCY RANGE FREQUENCY RANGE FREQUENCY RANGE FREQUENCY RANGE FREQUENCY (Typ.) AC CURRENT (Typ.) MAX. No. of PSUs on 16A CIRCUIT BREAKER LEAKAGE CURRENT OVER CURRENT OVER CURRENT OVER VOLTAGE OVER TEMPERATURE WORKING TEMP. MAX. CASE TEMP. WORKING HUMIDITY SO ~ 955% RH WORKING HUMIDITY TCASE = -40 ~ MAX. CASE TEMP. WORKING HUMIDITY TCASE = -40 ~ MAX. CASE TEMP. WORKING HUMIDITY TCASE = -40 ~ MAX. CASE TEMP. WORKING HUMIDITY TCASE = -40 ~ MAX. CASE TEMP. WORKING HUMIDITY TCASE = -40 ~ MAX. CASE TEMP. WORKING HUMIDITY TCASE = -40 ~ MAX. CASE TEMP. WORKING HUMIDITY TCASE = -40 ~ MAX. CASE TEMP. WORKING HUMIDITY TCASE = -40 ~ MAX. CASE TEMP. WORKING HUMIDITY TCASE = -40 ~ MAX. CASE TEMP. WORKING HUMIDITY TCASE = -40 ~ MAX. CASE TEMP. WORKING HUMIDITY TCASE = -40 ~ MAX. CASE TEMP. WORKING HUMIDITY TCASE = -40 ~ MAX. CASE TEMP. WORKING HUMIDITY TCASE = -40 ~ MAX. CASE TEMP. WORKING HUMIDITY TCASE = -40 ~ MAX. CASE TEMP. WORKING HUMIDITY TCASE - 40 ~ MAX. CASE TEMP. WORKING HUMIDITY TCASE - 40 ~ CONSTANT AS/NZS 6134' AB and D-type WITHSTAND VOLTAGE I/P-O/P, I/P-F EMC EMISSION Note.8 COMPIJANCE tO GB17743 and EMC IMMUNITY COMPIJANCE COM	CONSTANT CURRENT REGION Note.4 RATED CURRENT RATED CURRENT RATED POWER RIPPLE & NOISE (max.) Note.2 150mVp-p 150mVp 150mVp 150mVp 150mVp 150mVp 15	CONSTANT CURRENT REGION Note.4 6 ~ 12V 7.5 ~ 15V 10 ~ 20V	CONSTANT CURRENT REGION Note.2 6 -12V	CONSTANT CURRENT REGION Mote/A RATED CURRENT 6 - 12V 7.5 - 15V 10 - 20V 12 - 24V 15 - 30V RATED POWER RATED POWER 120W 120W	CONSTANT CURRENT REGION Note.2 6 −12 V 7.5 −15 V 10 − 20 V 12 − 24 V 15 − 30 V 18 − 36 V RATED CURRENT 10 A BA 6 A 5A 4A 3.4A RATED POWER 120W 120W 120W 120W 120W 120 W 120 MW 120 MW <th< td=""><td>CONSTANT CURRENT REGION Notes. 6 -12V 7.5 -15V 10 -20V 12 -24V 15 -30V 18 -36V 21 -42V ARATED CURRENT 10A 8A 6A 5A 4A 3.4A 2.9A 2.9A ARTED POWER 12DW 12DW 12DW 12DW 12DW 12DW 12DW 12DW</td><td>CONSTANT CURRENT REGION Name. 8 A 6 A 6 A 4 A 3.4A 29A 25A 25A 25A 25A 25A 25A 25A 25A 25A 25A</td></th<>	CONSTANT CURRENT REGION Notes. 6 -12V 7.5 -15V 10 -20V 12 -24V 15 -30V 18 -36V 21 -42V ARATED CURRENT 10A 8A 6A 5A 4A 3.4A 2.9A 2.9A ARTED POWER 12DW 12DW 12DW 12DW 12DW 12DW 12DW 12DW	CONSTANT CURRENT REGION Name. 8 A 6 A 6 A 4 A 3.4A 29A 25A

- 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
- 3. Tolerance: includes set up tolerance, line regulation and load regulation.
- 4. Please refer to "DRIVING METHODS OF LED MODULE".
- 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
- 6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
- 7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- 8. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains.
- 9. This series meets the typical life expectancy of >62,000 hours of operation when Tcase, particularly (to point (or TMP, per DLC), is about 75°C or less.
- 10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com
- 11. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- 12. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf
- X Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx


■ BLOCK DIAGRAM

Fosc: 100KHz

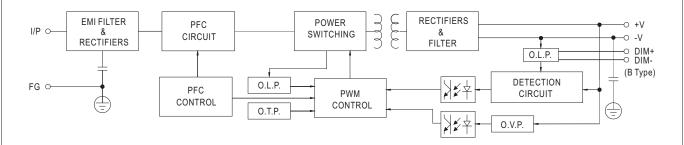

■ DRIVING METHODS OF LED MODULE

** This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

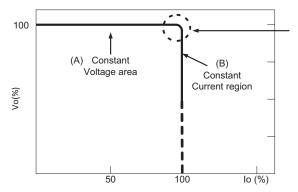

Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION




※ 3 in 1 dimming function (for B/AB-Type)

- $\cdot \ \, \text{Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:}$
 - 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: $100\mu A$ (typ.)
- O Applying additive 1 ~ 10VDC

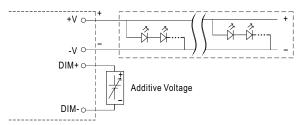


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

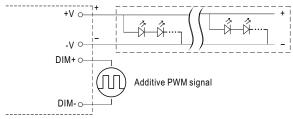



"DO NOT connect "DIM- to -V"


Applying additive resistance:

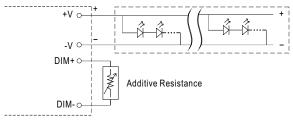

"DO NOT connect "DIM- to -V"











Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

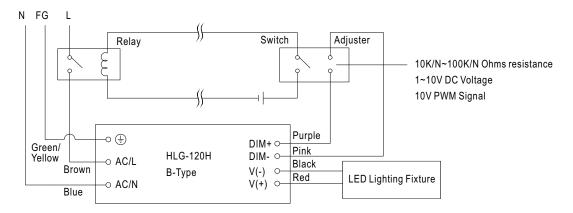


Using a switch and relay can turn ON/OFF the lighting fixture.




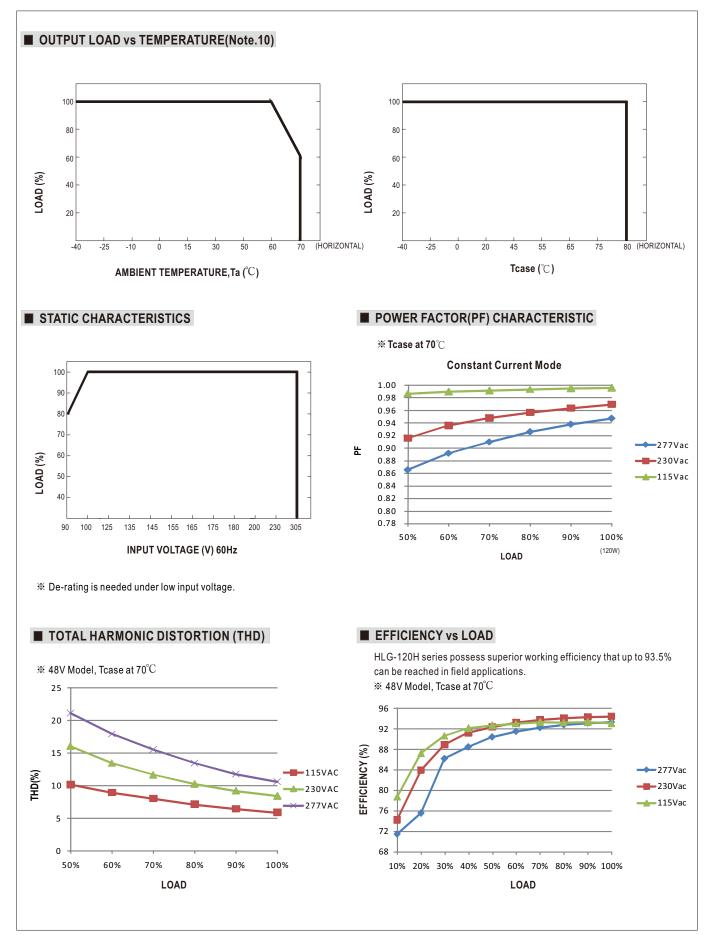


■ LIFE TIME

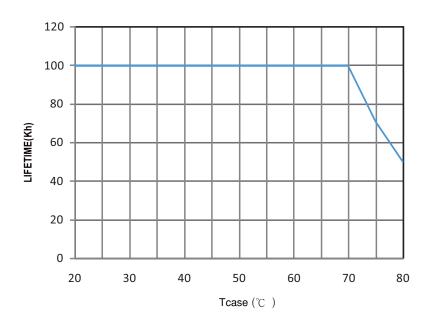



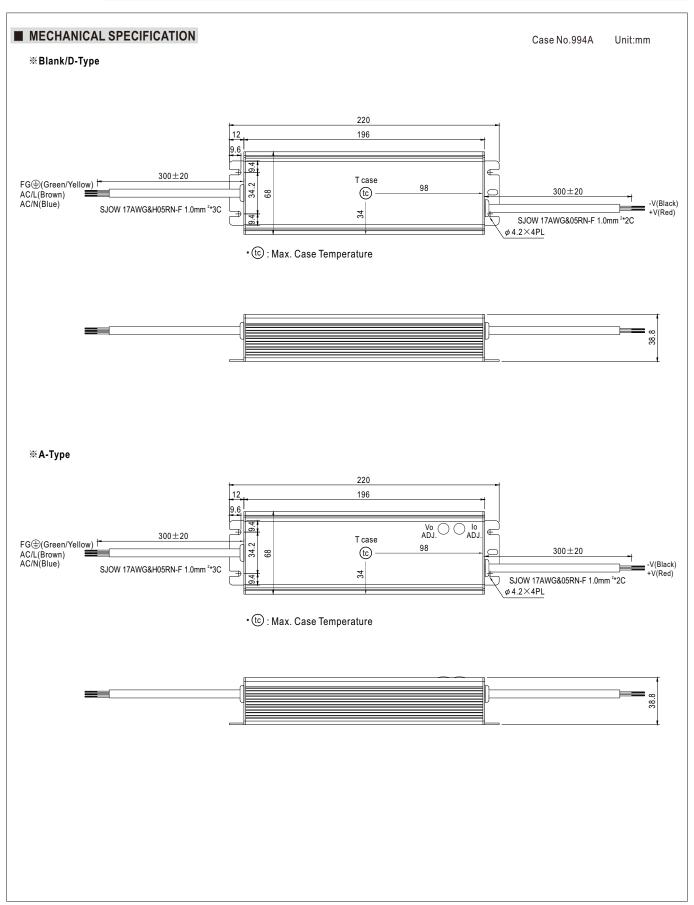



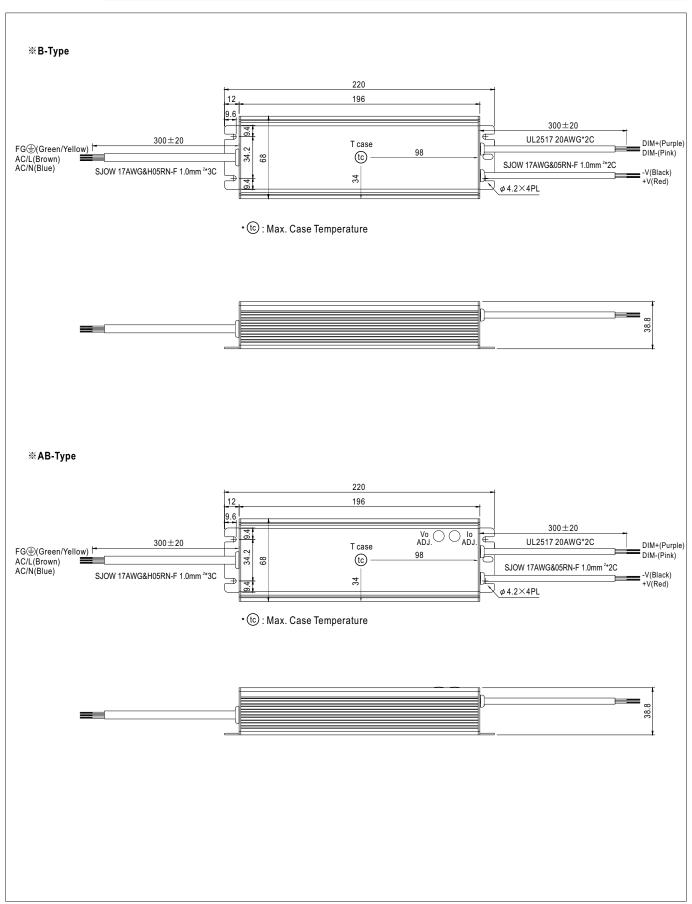




■ WATERPROOF CONNECTION


Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-120H to operate in dry/wet/damp or outdoor environment.




Size	Pin Configuration (Female)			
M12	000	000		
IVIIZ	4-PIN	5-PIN		
	5A/PIN	5A/PIN		
Order No.	M12-04	M12-05		
Suitable Current	10A max.	10A max.		

Size	Pin Configuration (Female)		
M15	(o)		
IVIIO	2-PIN		
	12A/PIN		
Order No.	M15-02		
Suitable Current	12A max.		




X Cable Joiner

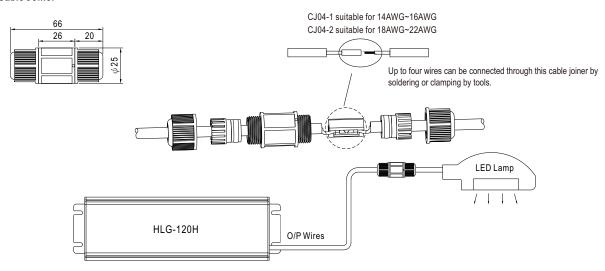

© CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

*** Junction Box Option**

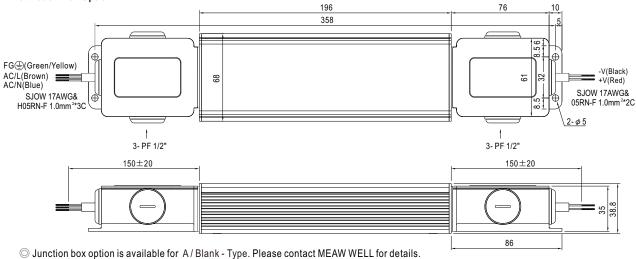

■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html