
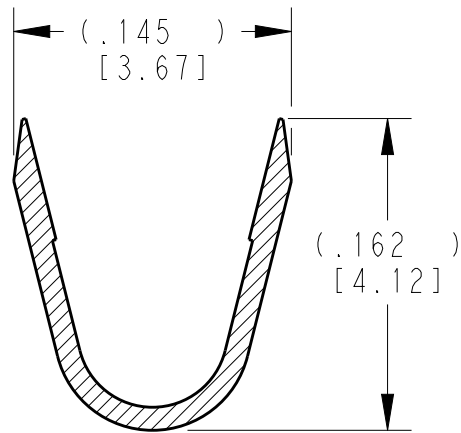
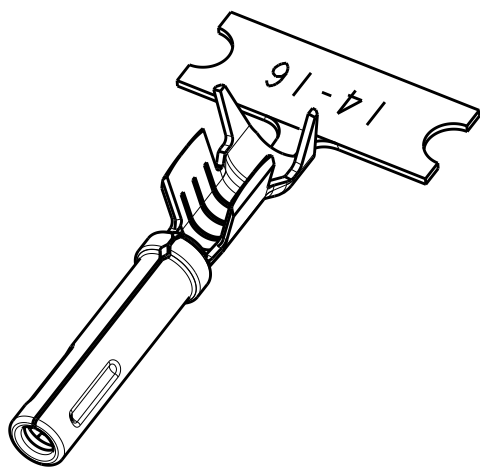



2

1

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			NC	NEW RELEASE PER E.O. PI8906	07AUG2005	VT	RDR
			A	REVISED PER E.O PI9555	07NOV2007	JA	RDR
			B	REVISED PER E.O P20396	25JUN2010	JA	RDR
			C	REVISED PER ECO-15-007761	28MAY2015	RL	DM

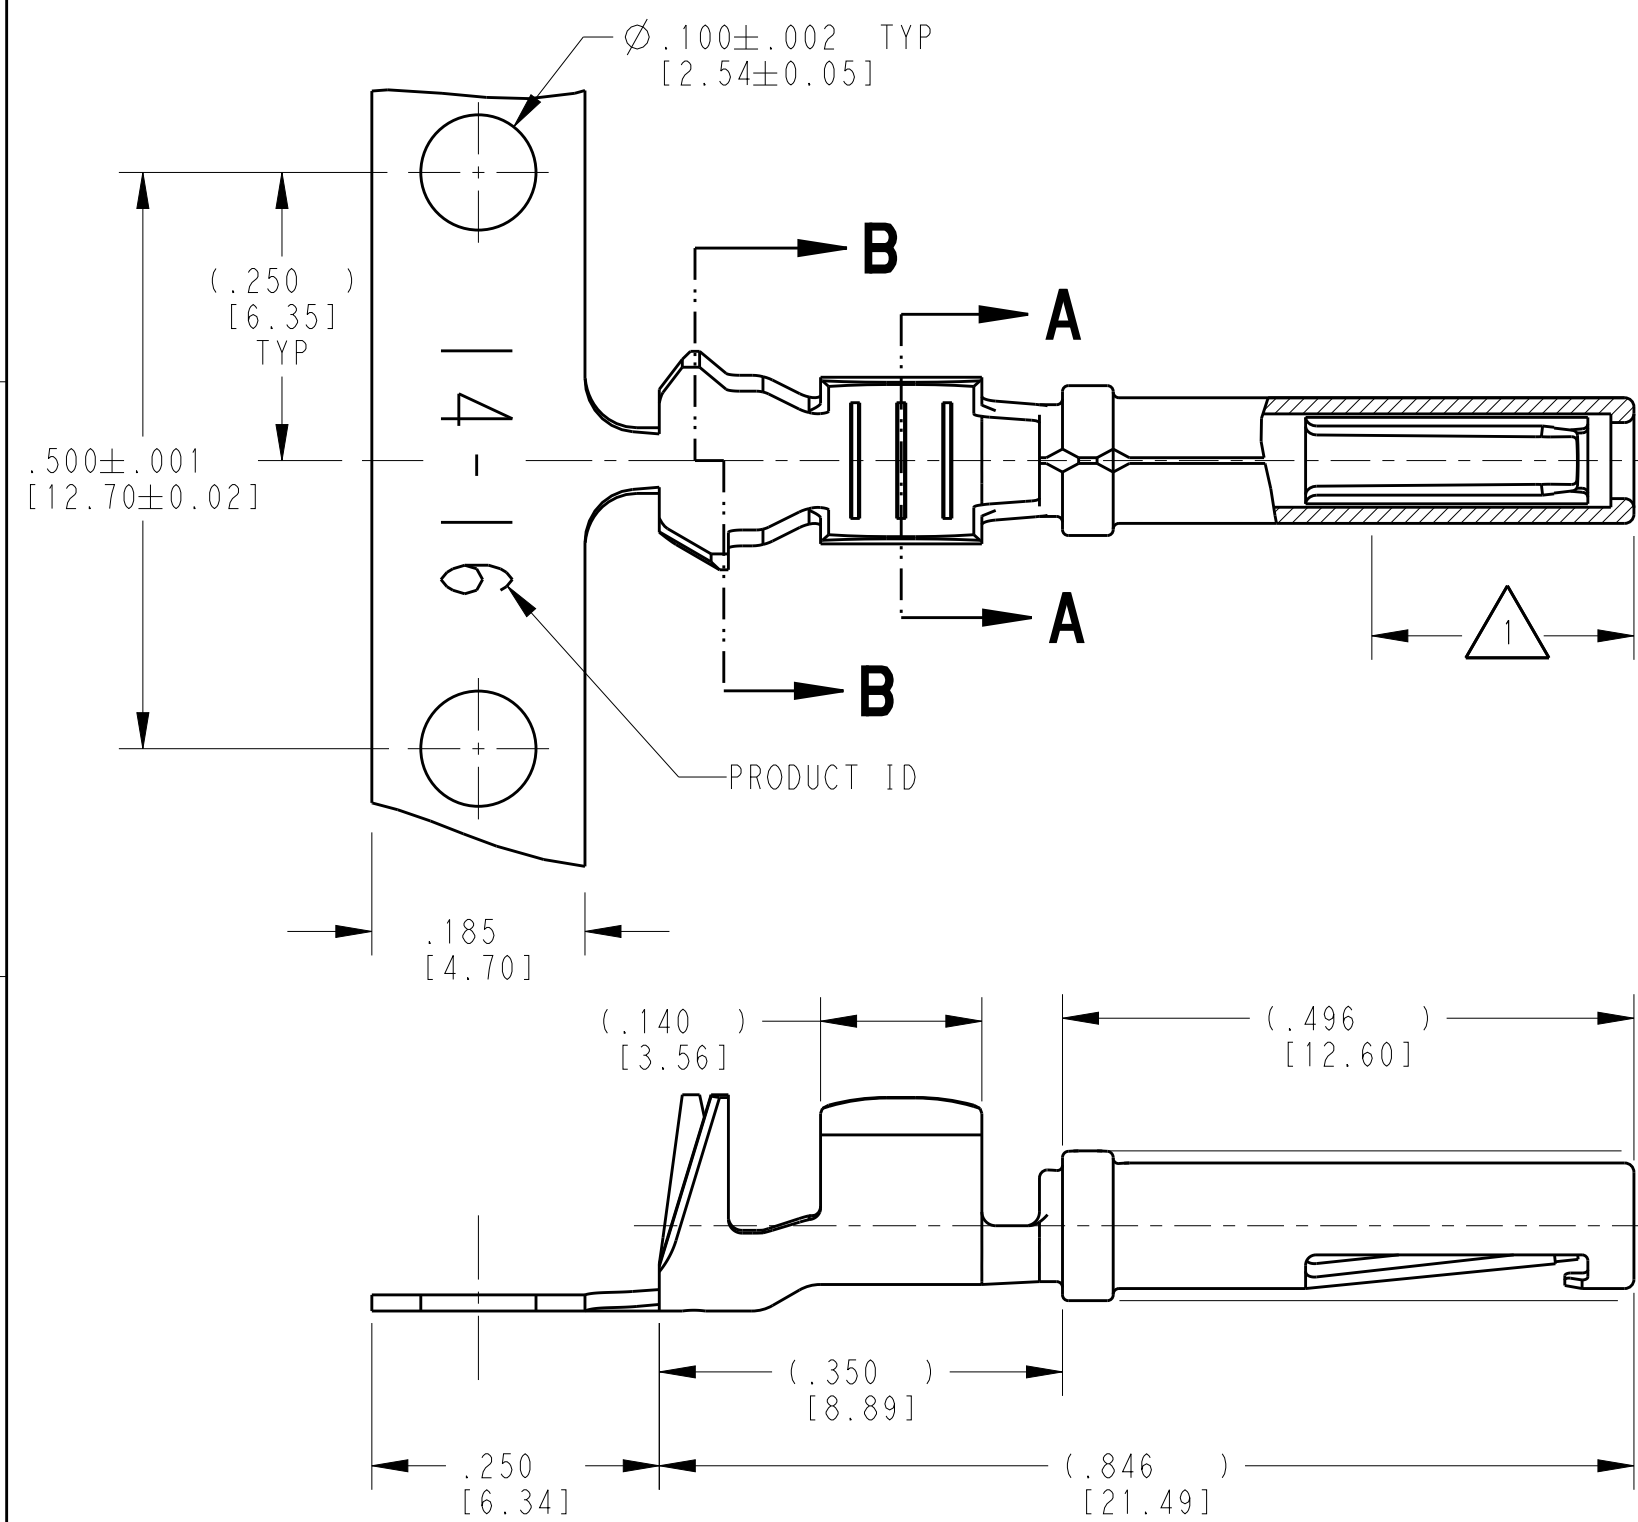

SECTION A-A
WIRE BARREL

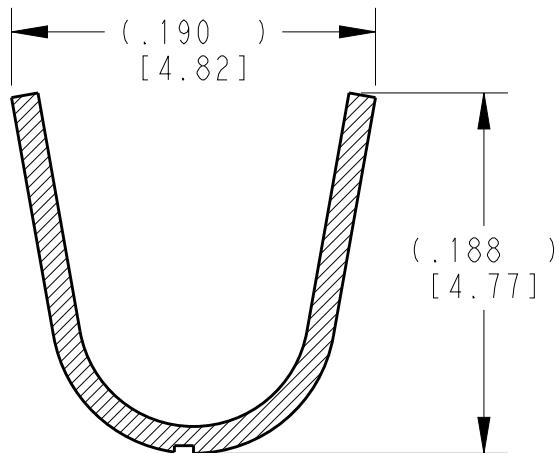


SECTION B-B
INSULATION BARREL

- 3 MATERIAL: .014 [0.36] THICK CU ALLOY
2. WIRE RANGE: 16 AWG TO 12 AWG [$1.0-2.5 \text{ mm}^2$]
INSULATION RANGE: $\varnothing .075-.140$ [$\varnothing 1.91-3.56$]
- 1 APPLIES ONLY TO SELECTIVE GOLD 1062-16-1444.
INDICATED DIMENSION SHOWS GOLD PLATED AREA.

NOTES: UNLESS OTHERWISE SPECIFIED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES[mm]



MATERIAL



TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC $\pm$
1 PLC $\pm$
2 PLC $\pm$
3 PLC $\pm .025$ [0.64]
4 PLC $\pm$
ANGLES $\pm$

FINISH

SEE TABLE

DWN 16MAY2005

DAVID MEYER

CHK 26JUN2005

DAVID MEYER

APVD 29JAN2005

VLADIMIR TOMSA

PRODUCT SPEC

0425-015-0000

APPLICATION SPEC

0425-039-0000

WEIGHT

0.52 g

Customer Drawing

TE INTERNAL PN	DEUTSCH PN	PLATING
1062-16-1422	1062-16-1422	NICKEL
1062-16-1444	1062-16-1444	SELECTIVE GOLD
1062-16-1477	1062-16-1477	TIN



TE Connectivity

NAME
SOCKET, STAMPED AND FORMED
SIZE 16
12-16AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	4AFU8	C-1062-16-14XX	-

SCALE 6:1

SHEET 1 OF 1

REV C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1062-16-1422](#)