
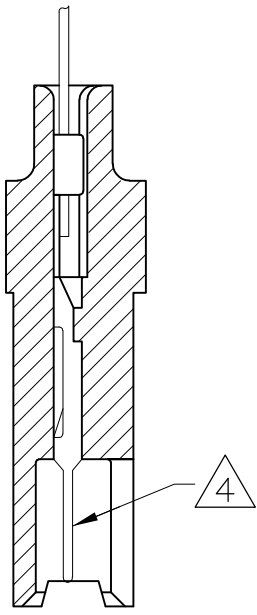
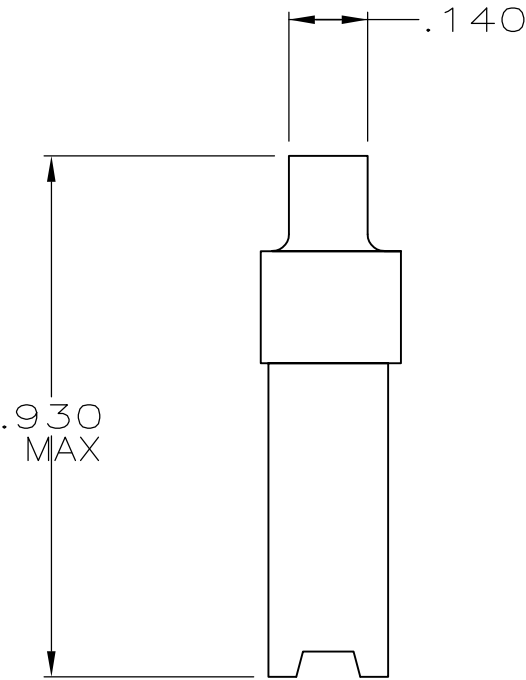
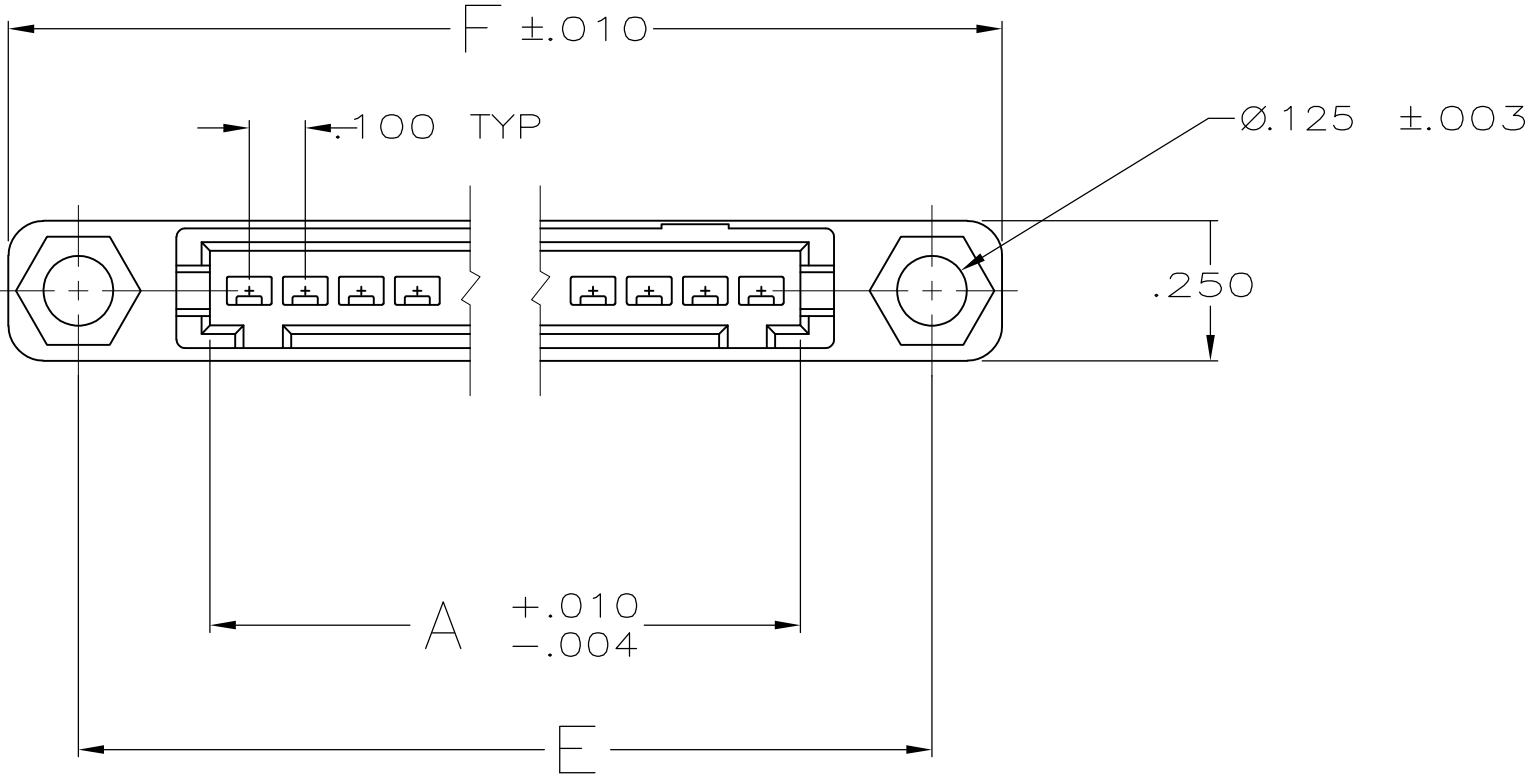
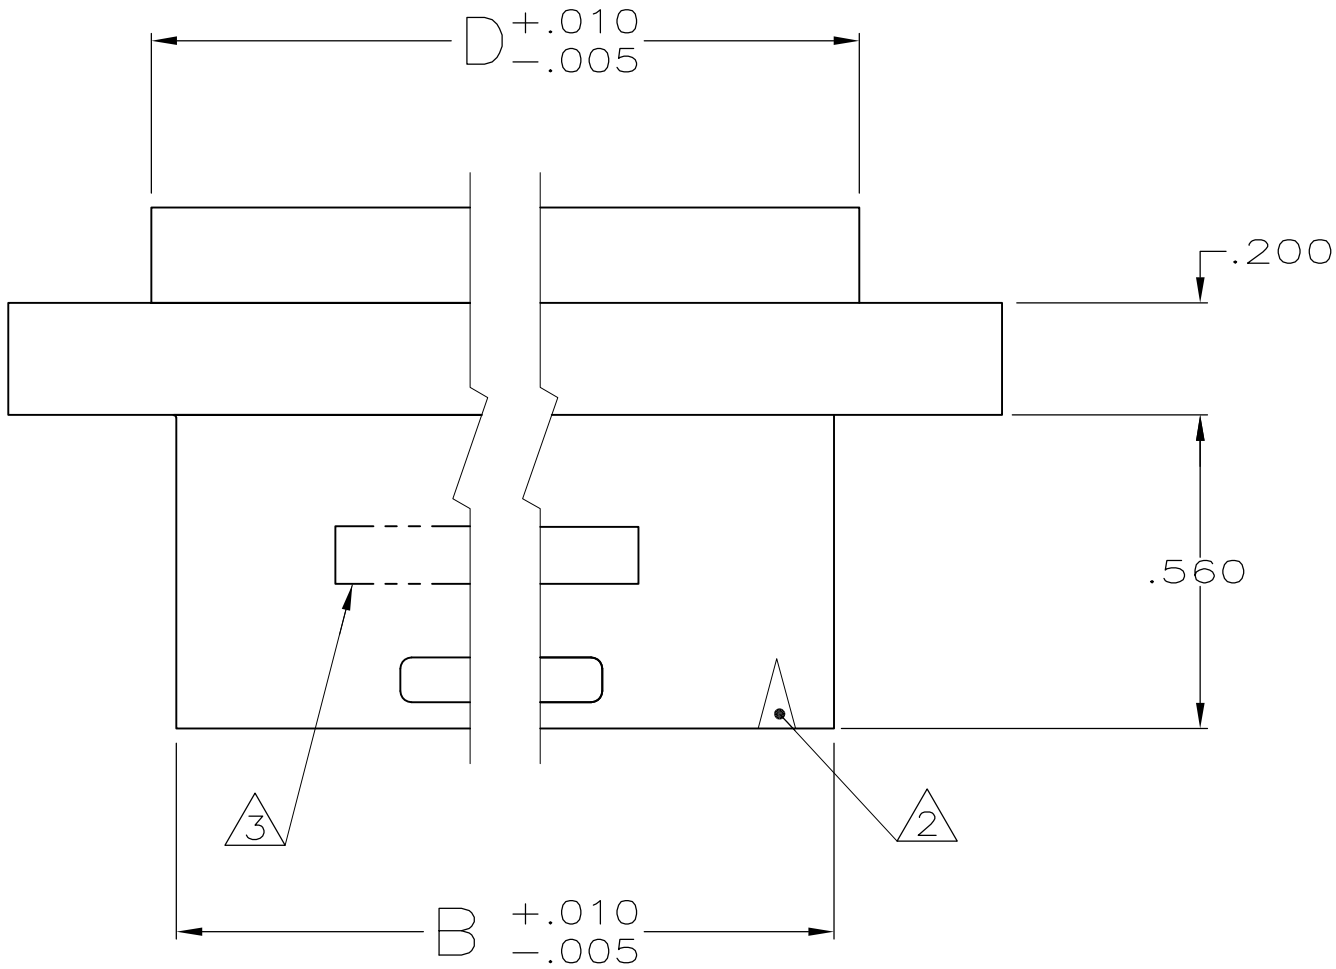


MOD	LOC	DIST	REVISIONS						
85	AR	39	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
						M1	REVISED PER ECO-09-021510	09SEP09	AEG

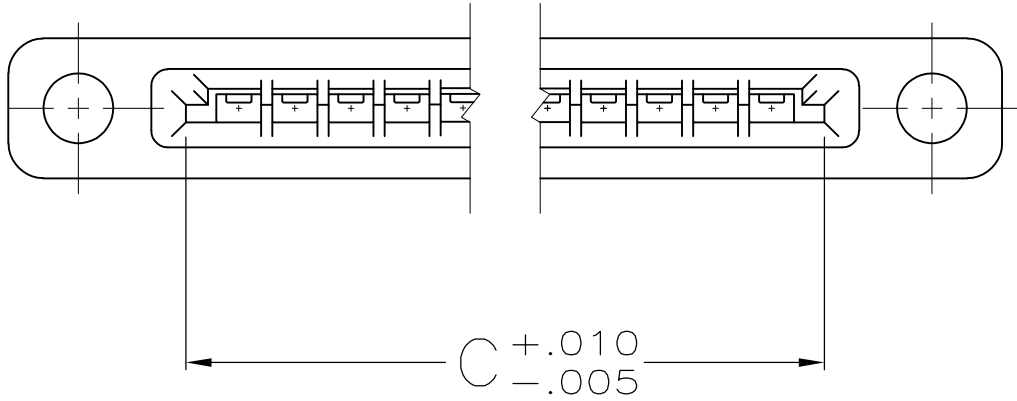

CRIMPED CONTACT
FOR REF ONLY

1. HOUSING WILL ACCOMMODATE FLEXIABLE FLAT CONDUCTOR CABLE
.050 OR .062 WIDE CONDUCTORS ON .100 CENTERS AND/OR #32-22 AWG
WIRE WITH INSULATION RANGE .025-.056 DIA.

- 2 INDICATES FIRST POSITION.
- 3 AMP TRADEMARK MOLDED IN IN AREA SHOWN.
- 4 PIN CONTACTS MUST BE ORDERED SEPARATELY.
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

5 OBSOLETE	1.760	1.510	1.250	1.126	1.160	1.040	10	494073-2
	1.260	1.010	.750	.626	.660	.540	5	494073-1

	F	E	D	C	B	A	NO OF POSN	PART NO
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± .005 ANGLES ± -	DR 3/9/89 KATE HELM				<div>AMP</div> AMP INCORPORATED Harrisburg, Pa. 17105			
	CHK 3-27-89 D.ROCKER							
	APPD 4-6-89 G.D.MILLER				NAME HOUSING,PIN,W/DETENT SLOTS AND MTG EARS, .100¢, FFC			
MATERIAL THERMOPLASTIC FLAME RETARDANT COLOR: BLACK	APPD 4-6-89 W.PACKER							
	PRODUCT SPEC -							
FINISH -	APPLICATION SPEC -				SIZE C	FSCM NO 00779	DRAWING NO 494073	
	WEIGHT -				SCALE 4:1		SHEET 10F 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[494073-1](#)