




RECOMMENDED
PCB LAYOUT

CIRCUIT DIAGRAM

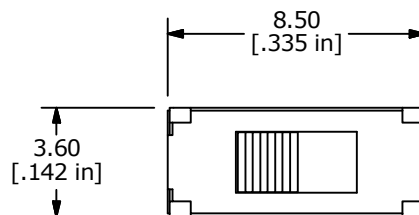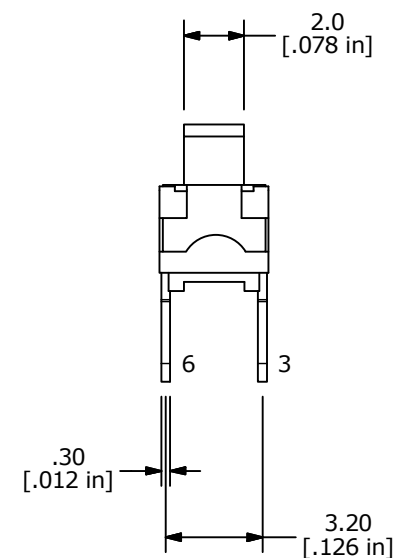

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
4. CONTACT RATING: 0.3A @ 30VDC
5. TRAVEL: 2.0 mm
6. OPERATING FORCE: 250 \pm 150gf
7. ▲ DENOTES CRITICAL PARAMETER

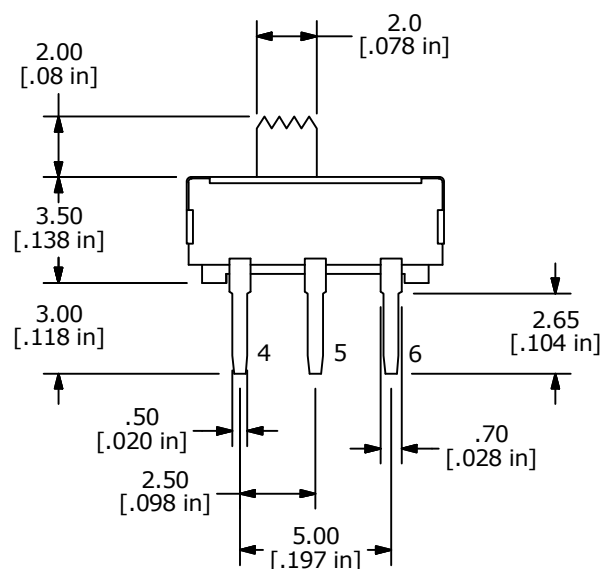

TITLE EG1271 (SPDT NON-SHORTING)

F	23607	UPDATED AND REDRAWN	10/5/18	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 4:1	DATE 10/5/2018	DR MW	DWG P040046	REV F
--------------	-------------------	----------	----------------	----------

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[EG1271](#)