


### 215 Series, 5x20 mm, Time-Lag Fuse

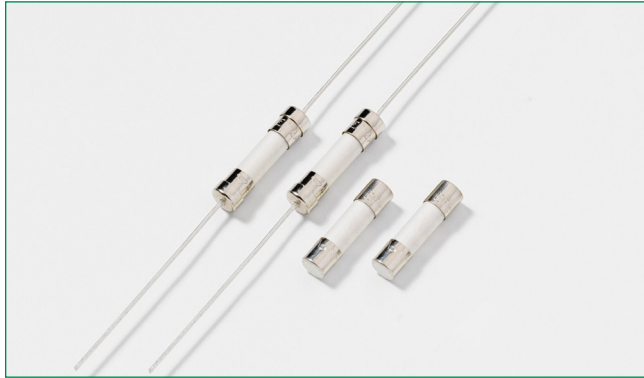

#### Description

The 215 Series is a 5x20mm Time-lag, surge-withstand, ceramic body cartridge fuse that is designed to IEC specifications.

#### Features

- Conforms to EN/IEC/K/J 60127-1 and EN/IEC/K/J 60127-2
- High breaking capacity
- Meets Standard Sheet 5 of IEC 60127-2 as a Time-Lag fuse
- RoHS compliant and lead-free
- Recognized to UL/CSA/NMX 248-1 and UL/CSA/NMX 248-14
- Conforms to GB 9364.1 and GB 9364.2
- CE Mark indicates compliance with Low-Voltage and RoHS Directives.

#### Applications

Used as supplementary protection in appliance or utilization equipment to provide individual protection for components or internal circuits.

#### Additional Information



Datasheet














Resources



Samples

#### Agency Approvals

| Agency  | Agency File Number  | Ampere Range                       |
|---|---|------------------------------------|
|  | Cartridge:<br>NBK080205-E10480A<br>NBK250702-E10480E<br>NBK100408-JP1021A | 1A – 5A<br>6.3A – 15A<br>16A – 20A |
|   | Leaded:<br>NBK080205-E10480B<br>NBK250702-E10480F<br>NBK100408-JP1021B    | 1A – 5A<br>6.3A – 15A<br>16A – 20A |
|  | 2020970207000067  | 0.125A-10A                         |
|  | SU05001-2011B   | 1A – 2.5A                          |
|   | SU05001-10001   | 3.15A – 6.3A                       |
|   | SU05001-10002   | 8A                                 |
|   | SU05001-2012B   | 4A - 10A                           |
|  | E10480  | 0.125A - 20A                       |
|  | 29862   | 0.5A – 12A                         |
|  | SE-S-2101268  | 0.125A-12A                         |
|   |   | 15A*, 16A*, 20A*                   |
|  | 40013521  | 0.2A – 8A<br>*10A                  |
|  | 40016610  | *12A                               |
|  | KM41462   | 0.200A – 10A                       |
|  | J50248091   | 10A                                |
|   | J50258578   | 16A, 20A                           |
|  | N/A   | 0.125A – 20A                       |

\* Approved for cartridge versions only

#### Electrical Characteristics for Series


| % of Ampere Rating | Ampere Rating   | Opening Time                     |
|--------------------|-----------------|----------------------------------|
| 150%               | 0.125A – 0.800A | 60 minutes, Minimum              |
|                    | 1A – 3.15A      | 60 minutes, Minimum              |
|                    | 4A – 6.3A       | 60 minutes, Minimum              |
|                    | 8A – 20A        | 30 minutes, Minimum              |
| 210%               | 0.125A – 0.800A | 30 minutes, Maximum              |
|                    | 1A – 3.15A      | 30 minutes, Maximum              |
|                    | 4A – 6.3A       | 30 minutes, Maximum              |
|                    | 8A – 20A        | 30 minutes, Maximum              |
| 275%               | 0.125A – 0.800A | 0.25 sec. Min.; 80 secs. Max.    |
|                    | 1A – 3.15A      | 0.75 sec. Min.; 80 secs. Max.    |
|                    | 4A – 6.3A       | 0.75 sec. Min.; 80 secs. Max.    |
|                    | 8A – 20A        | 0.75 sec. Min.; 80 secs. Max.    |
| 400%               | 0.125A – 0.800A | 0.05 sec., Min.; 5 secs. Max.    |
|                    | 1A – 3.15A      | 0.095 sec., Min.; 5 secs. Max.   |
|                    | 4A – 6.3A       | 0.150 sec., Min.; 5 secs. Max.   |
|                    | 8A – 20A        | 0.150 sec., Min.; 5 secs. Max.   |
| 1000%              | 0.125A – 0.800A | 0.005 sec., Min.; .150 sec. Max. |
|                    | 1A – 3.15A      | 0.010 sec., Min.; .150 sec. Max. |
|                    | 4A – 6.3A       | 0.010 sec., Min.; .150 sec. Max. |
|                    | 8A – 20A        | 0.010 sec., Min.; .150 sec. Max. |

**Electrical Characteristic Specifications by Item**

| Amp Code | Amp Rating | Voltage Rating (V) | Interrupting Rating* | Nominal Cold Resistance (Ohms) | Nominal Melting Pt (A <sup>2</sup> sec) | Maximum Voltage Drop at Rated Current (mV) | Maximum Power Dissipation at 1.5In (W) | Agency Approvals |     |    |    |    |    |    |    |    |    |    |
|----------|------------|--------------------|----------------------|--------------------------------|---|--|--|------------------|-----|----|----|----|----|----|----|----|----|----|
|          |            |                    |                      |                                |   |  |  | UL               | CSA | UL | UL | UL | UL | UL | UL | UL | UL | UL |
| .125     | 0.125      | 250                | 1500 A @ 250 VAC     | 11.4455                        | 0.0330                                  | 2600                                       | 1.6                                    | -                | -   | x  | -  | x  | -  | x  | -  | -  | -  | x  |
| .160     | 0.16       | 250                |                      | 7.1000                         | 0.0465                                  | 2400                                       | 1.6                                    | -                | -   | x  | -  | x  | -  | x  | -  | -  | -  | x  |
| .200     | 0.2        | 250                |                      | 1.8400                         | 0.340                                   | 2100                                       | 1.6                                    | x                | -   | x  | -  | x  | -  | x  | x  | -  | -  | x  |
| .250     | 0.25       | 250                |                      | 1.2400                         | 0.545                                   | 1500                                       | 1.6                                    | x                | -   | x  | -  | x  | -  | x  | x  | -  | -  | x  |
| .315     | 0.315      | 250                |                      | 0.8800                         | 0.975                                   | 1100                                       | 1.6                                    | x                | -   | x  | -  | x  | -  | x  | x  | -  | -  | x  |
| .400     | 0.4        | 250                |                      | 0.5825                         | 1.325                                   | 1000                                       | 1.6                                    | x                | -   | x  | -  | x  | -  | x  | x  | -  | -  | x  |
| .500     | 0.5        | 250                |                      | 1.1675                         | 0.420                                   | 850  | 1.6                                    | x                | -   | x  | -  | x  | x  | x  | x  | -  | -  | x  |
| .630     | 0.63       | 250                |                      | 0.7200                         | 0.635                                   | 650  | 1.6                                    | x                | -   | x  | -  | x  | x  | x  | x  | -  | -  | x  |
| .800     | 0.8        | 250                |                      | 0.4675                         | 0.975                                   | 500  | 1.6                                    | x                | -   | x  | -  | x  | x  | x  | x  | -  | -  | x  |
| 001.     | 1          | 250                |                      | 0.1515                         | 1.520                                   | 350  | 2.5                                    | x                | x   | x  | x  | x  | x  | x  | x  | -  | -  | x  |
| 1.25     | 1.25       | 250                |                      | 0.1074                         | 3.200                                   | 300  | 2.5                                    | x                | x   | x  | x  | x  | x  | x  | x  | -  | -  | x  |
| 01.6     | 1.6        | 250                |                      | 0.0707                         | 6.830                                   | 200  | 2.5                                    | x                | x   | x  | x  | x  | x  | x  | x  | -  | -  | x  |
| 002.     | 2          | 250                |                      | 0.0566                         | 11.680                                  | 190  | 2.5                                    | x                | x   | x  | x  | x  | x  | x  | x  | -  | -  | x  |
| 02.5     | 2.5        | 250                |                      | 0.0386                         | 22.290                                  | 180  | 2.5                                    | x                | x   | x  | x  | x  | x  | x  | x  | -  | -  | x  |
| 3.15     | 3.15       | 250                |                      | 0.0283                         | 43.255                                  | 140  | 4                                      | x                | x   | x  | x  | x  | x  | x  | x  | -  | -  | x  |
| 004.     | 4          | 250                |                      | 0.0185                         | 46.960                                  | 100  | 4                                      | x                | x   | x  | x  | x  | x  | x  | x  | -  | -  | x  |
| 005.     | 5          | 250                |                      | 0.0153                         | 66.095                                  | 100  | 4                                      | x                | x   | x  | x  | x  | x  | x  | x  | -  | -  | x  |
| 06.3     | 6.3        | 250                |                      | 0.0108                         | 128.750                                 | 100  | 4                                      | x                | x   | x  | x  | x  | x  | x  | x  | -  | -  | x  |
| 008.     | 8          | 250                |                      | 0.0092                         | 209.880                                 | 100  | 4                                      | x                | x   | x  | x  | x  | x  | x  | x  | -  | -  | x  |
| 010.     | 10         | 250                |                      | 0.0066                         | 333.565                                 | 100  | 4                                      | x                | x   | x  | x  | x  | x  | x  | x* | -  | x  | x  |
| 012.     | 12         | 250                | 0.0061               | 515.500                        | 100                                     | 4  | -                                      | x                | -   | -  | x  | x  | x  | -  | x* | -  | x  |    |
| 015.     | 15         | 250                | 500 A @ 250Vac       | 0.0033                         | 1237.0                                  | N/A**                                      | N/A**                                  | -                | x   | -  | -  | x  | -  | x* | -  | -  | x  |    |
| 016.     | 16         | 250                | 500 A @ 250Vac       | 0.0031                         | 1408.0                                  | N/A**                                      | N/A**                                  | -                | x   | -  | -  | x  | -  | x* | -  | -  | x  |    |
| 020.     | 20         | 250                | 400 A @ 250Vac       | 0.0023                         | 2600.0                                  | N/A**                                      | N/A**                                  | -                | x   | -  | -  | x  | -  | x* | -  | -  | x  |    |

\* Approval for cartridge versions only  
 \*\* Please contact Littelfuse for details on these parameters  
 + Interrupting Rating may differ based on Agency Approval. See Agency Approval certificate for more details.  
 1A to 2A have an IR : 100A@500VAC, 4A to 6-3A have the IR : 100A@305 VAC and 1000A@72VDC  
 I2t test at 10x rated current.  
 10A have an IR:1000A@300Vac for cURus

**Temperature Re-rating Curve**

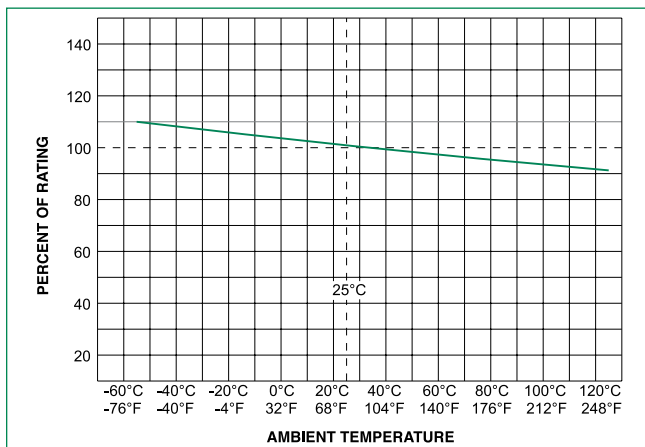


**Product Characteristics**


|                              |  |
|------------------------------|--|
| <b>Materials</b>             | Body: Ceramic<br>Cap: Nickel-plated Brass<br>Leads: Tin-plated Copper                            |
| <b>Terminal Strength</b>     | MIL-STD-202, Method 211, Test Condition A  |
| <b>Solderability</b>         | MIL-STD-202 Method 208   |
| <b>Product Marking</b>       | Cap 1: Brand logo, current and voltage ratings<br>Cap 2: Agency approval markings                |
| <b>Operating Temperature</b> | -55°C to +125°C  |
| <b>Thermal Shock</b>         | MIL-STD-202, Method 107, Test Condition B (5 cycles, -65°C to +125°C)                            |
| <b>Vibration</b>             | MIL-STD-202, Method 201  |
| <b>Humidity</b>              | MIL-STD-202, Method 103, Test Condition A (High RH (95%) and elevated temp (40°C) for 240 hours) |
| <b>Salt Spray</b>            | MIL-STD-202, Method 101, Test Condition B  |

### Average Time Current Curves


T-C Curves for 125mA to 800mA only

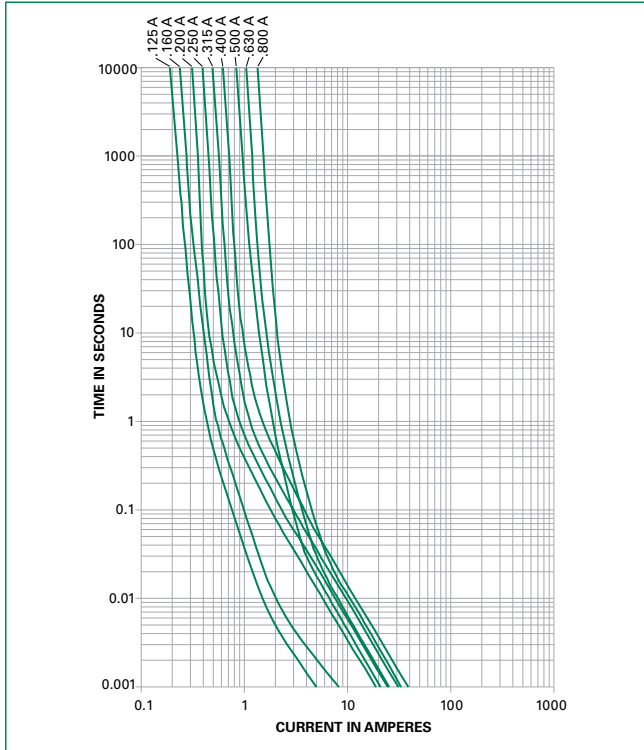


T-C Curves for 1A to 20A only

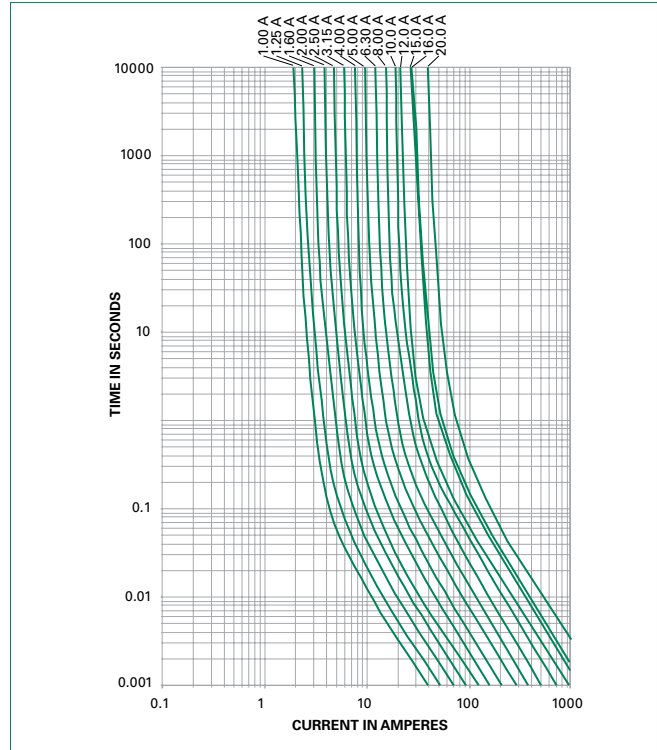

### Soldering Parameters - Wave Soldering

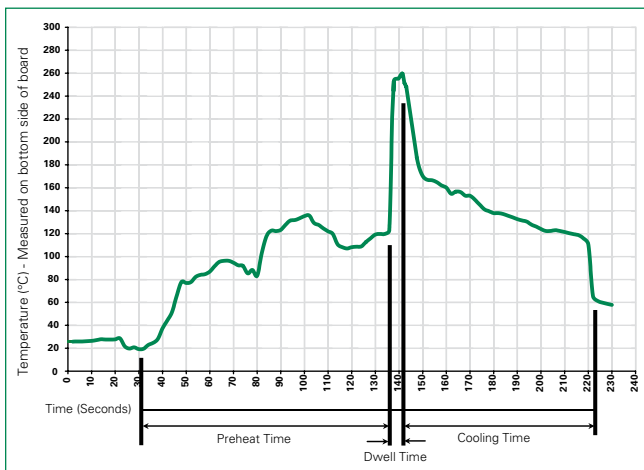

Different values of A and B available, please contact the Littelfuse sales representative in your region:

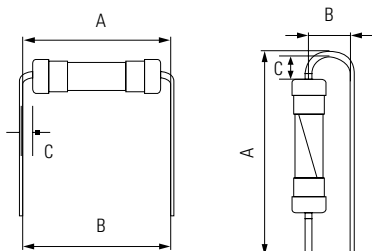

### Recommended Process Parameters:

| Wave Parameter                                       | Lead-Free Recommendation          |
|--|-----------------------------------|
| Preheat:<br>(Depends on Flux Activation Temperature) | (Typical Industry Recommendation) |
| Temperature Minimum:                                 | 100° C                            |
| Temperature Maximum:                                 | 150° C                            |
| Preheat Time:  | 60-180 seconds                    |
| Solder Pot Temperature:                              | 260° C Maximum                    |
| Solder Dwell Time:                                   | 2-5 seconds                       |

### Recommended Hand-Solder Parameters:

Solder Iron Temperature: 350° C +/- 5° C  
Heating Time: 5 seconds max.

**Note: These devices are not recommended for IR or Convection Reflow process.**

For the pigtailed fuse, please follow the recommendations below for axial lead forming and mounting into PCB:

#### Lead forming:


The distance C between cap flat surface and axial lead shall be greater than 1.0 mm.

#### PCB mounting:

The distance between PCB and fuse cap is recommended to be a minimum of 1.5 mm.


### Dimensions

All dimensions in mm

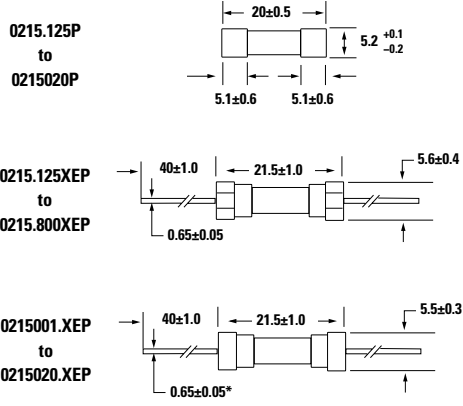

Notes:  
\* Ratings above 6.3 A have 0.8 ± 0.05 diameter lead;  
\* Ratings above 12 A have 1.2 ± 0.05 diameter lead.

### Part Numbering System

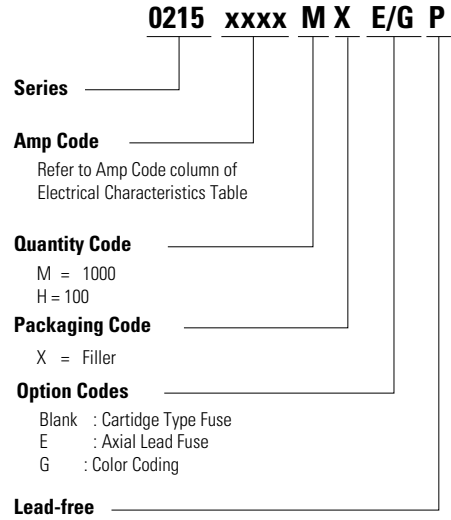

### Packaging

| Packaging Option      | Packaging Specification | Quantity | Quantity & Packaging Code | Taping Width     |
|-----------------------|-------------------------|----------|---------------------------|------------------|
| <b>215 Series</b>     |                         |          |                           |                  |
| Bulk                  | N/A                     | 1000     | MX                        | N/A              |
| Bulk                  | N/A                     | 1000     | MXE                       | N/A              |
| Reel and Tape         | N/A                     | 1000     | MRET1                     | T1=53mm (2.087") |
| Bulk and Color Coding | N/A                     | 1000     | MXG                       | N/A              |
| Bulk                  | N/A                     | 1000     | MXB                       | N/A              |
| Bulk                  | N/A                     | 100      | HX                        | N/A              |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Littelfuse:

[215001](#) [215005XE](#) [215010XE](#) [215.200XP](#) [215002.XP](#) [215008XE](#) [215.200](#) [215.500](#) [215002](#) [21502.5](#) [2153.15](#)  
[215005](#) [21506.3](#) [215008](#) [215010](#) [21506.3XE](#) [0215.250MXP](#) [021506.3H-](#) [021502.5MXP](#) [02151.25M-](#)  
[0215010.MXE-](#) [021501.6M-](#) [0215.400H-](#) [0215004.H-](#) [0215.315MXEP](#) [0215005.MXP](#) [0215.315HXP](#) [0215.315MXP](#)  
[0215.200H-](#) [0215.200MXE-](#) [0215.400MXE-](#) [0215012.M-](#) [0215.630MXEP](#) [0215001.MXE-](#) [0215001.MXP](#) [02151.25H-](#)  
[0215004.MXEP](#) [0215.250HXP](#) [0215002.MXEP](#) [021501.6MXP](#) [0215.200MXP](#) [215.315XP](#) [215005.XEP](#)  
[0215.400HXP](#) [021502.5MXE-](#) [0215.315MXE-](#) [0215.500H-](#) [0215001.MXEP](#) [0215002.MXP](#) [021501.6MXE-](#)  
[0215.200HXP](#) [0215.500HXP](#) [0215.800HXP](#) [02153.15M-](#) [0215.400MXEP](#) [0215010.MXEP](#) [0215.200M-](#) [0215.315M-](#)  
[0215001.HXP](#) [02153.15HXP](#) [021506.3HXP](#) [02151.25MXE-](#) [021506.3MXE-](#) [0215005.H-](#) [0215012.MXP](#)  
[0215008.MXE-](#) [0215.500M-](#) [021502.5H-](#) [215001.XP](#) [0215.800H-](#) [021501.6H-](#) [0215.250MXEP](#) [02153.15MXEP](#)  
[0215010.HXP](#) [0215001.M-](#) [0215.630MXP](#) [0215002.M-](#) [021502.5M-](#) [21502.5XP](#) [215005.XP](#) [21506.3XEP](#)  
[021502.5MXBP](#) [0215004.MXBP](#) [0215.125MRET1P](#) [0215.125MXP](#) [0215.160MXP](#) [0215.315MRET1P](#)  
[0215.400MRET1P](#) [0215.500MRET1P](#) [02153.15MRET3-](#) [0215020.MXEP](#) [02153.15MRET1P](#) [0215.800MRET1P](#)  
[0215004.MRET1P](#) [0215002.MRET1P](#) [0215001.MRET1P](#) [0215005.MRET1P](#) [0215010.MRET1P](#) [0215010.TXP](#)  
[215008.XEP](#)