

- 1


ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2

MATERIAL: 2.54μm [.000100] MINIMUM TIN PLATED COPPER ALLOY, 0.74-0.79 [.030±.001] THICK.
3.

WIRE BARREL ACCEPTS ONE 10 OR 12 AWG STRANDED COPPER WIRE.
- 4

CONTACTS ON REEL SHALL BE CRIMPED USING APPLICATOR TOOL 567256.
- 5

LOOSE PIECE CONTACTS SHALL BE CRIMPED USING TOOLS AND DIE SETS LISTED BELOW.
HAND TOOL: AMP PART NO. 69710
PNEUMATIC TOOL: AMP PART NO. 69365
DIE SET 10 AWG: AMP PART NO. 58491-1
DIE SET 12 AWG: AMP PART NO. 58490-1

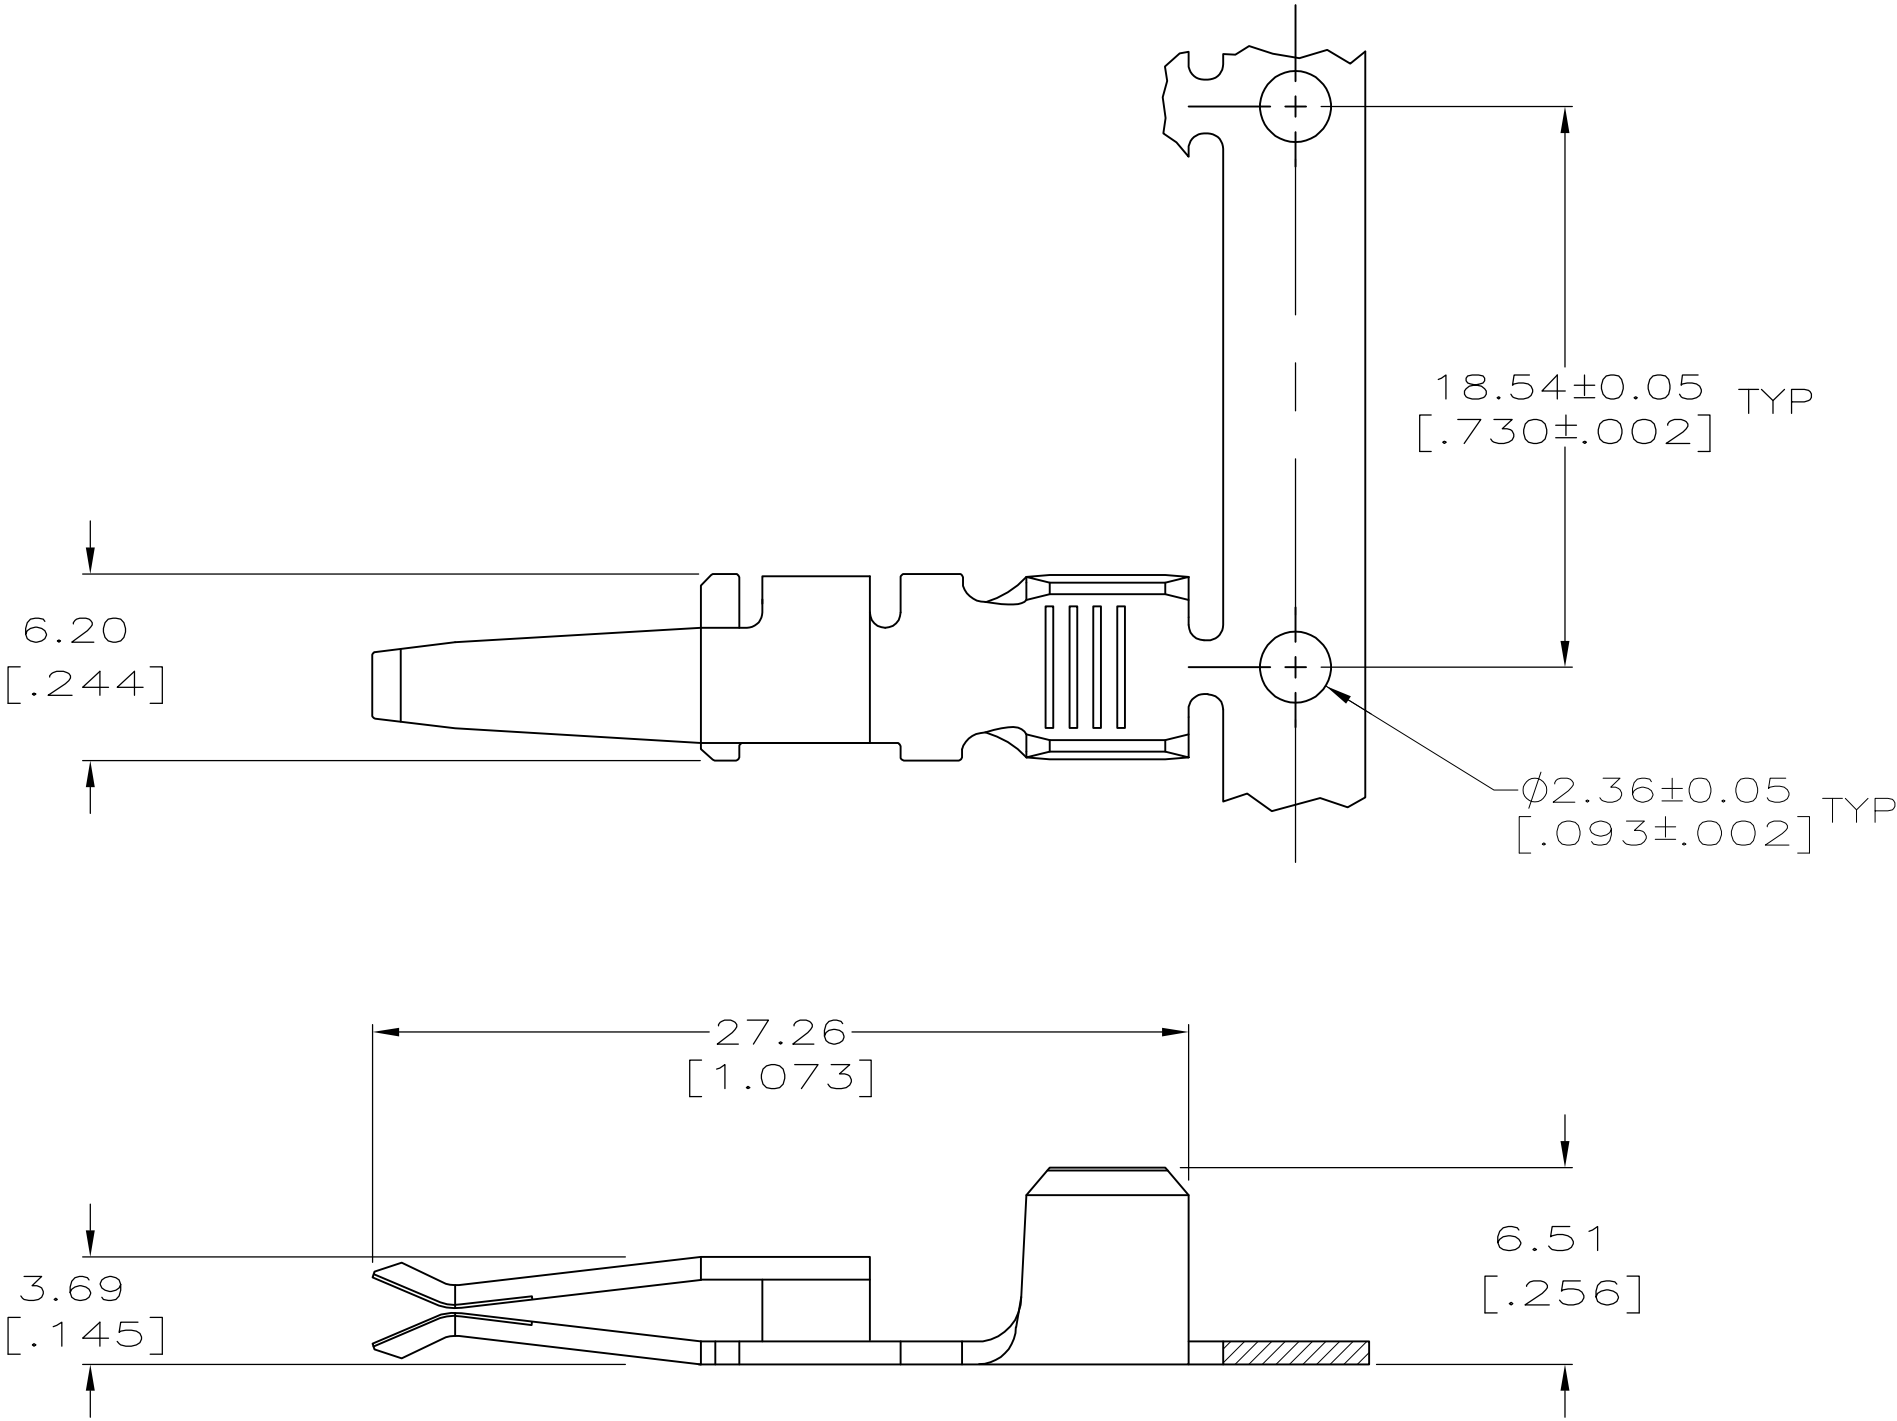

2000/REEL		4	556880-2	
LOOSE PIECE 200/BOX		5	556880-1	
DESCRIPTION			PART NO	
DWN D. STRAUSSER CHK B. FOX APVD M. MILLER PRODUCT SPEC 108-1349 APPLICATION SPEC 114-6044 WEIGHT -			5-30-91 8-23-91 8-26-91 NAME TE Connectivity CONTACT, DUAL BEAM, 10-12 AWG, WTB, AMPINNERGY TM	
SIZE A2		CAGE CODE 00779	DRAWING NO C=556880	RESTRICTED TO -
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1	REV C1

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± - 1
	1 PLC ± - 2
	2 PLC ± - 3
	3 PLC ± - 4
	4 PLC ± - ANGLES ± -
MATERIAL 2	FINISH 2