
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION **REVISIONS** ALL RIGHTS RESERVED. C COPYRIGHT - By -DESCRIPTION 04NOV2015 NK MZ REVISED PER ECO-15-011608 REVISED PER ECO-16-015569 03N0V2016 RS MZ REVISED PER ECO-17-013721 16N0V2017 RS MZ FINISH-SILVER PLATE 5.08um [200u"] THICK MIN. FINISH-NICKEL PLATE 1.12um [40u"] THICK MIN. D FINISH-GOLD PLATE 0.25um [10u"]THICK MIN. FINISH-GOLD PLATE 1.02um [40u"]THICK MIN. FINISH-GOLD PLATE 1.27um [50u"]THICK MIN. FINISH-NICKEL PLATE 2.54um[100u"]THICK MIN. 12 0.12 .005 04124 5-192041-0 A [.022]| .14 -- 2.36 [.093] 3-2|[30u"] THICK MIN. FINISH-GOLD PLATE 0.76um --| 4 192041 9 FINISH-GOLD PLATE 0.51um [20u"] THICK MIN. 04164 4-192041-8 12 0.12 [.005] -- 2.36 [.093] 1 - 2.022] .14 OBSOLETE FINISH-NICKEL PLATE 1.27um [50u"]THICK MIN. UNPL 12 0.12 [.005] .14 -- 2.36 [.093] 04136 4 192041 .022 FINISH-TIN PLATE 5.08um [200u"]THICK MIN. PLATING NOTES ARE TO BE INTERPRETED AS FOLLOWS, 04015 4-192041-6 6-8 AS 6 OVER 8. 04013 4-192041-5 MATERIAL: CDA172, BeCu. -- 2.03[.080] 04010 4-192041-4 OBSOLETE 12 0.15 [.006] Α 3 - 2.030] . 1 1 MATERIAL: STAINLESS STEEL. 1 - 212 0.15 [.006 -- 2.03[.080] 04200 4 192041 3 .030 . 1 1 PRODUCT IS SOLD BY THE FOOT. OBSOLETE 04083 4 192041 UNPL 12 0.15 [.006 -- 2.03[.080] . 1 1 .030 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER 3 - 2Α .09 -- 1.57 [.062] 12 0.15 [.006 04008 4-192041-.022 D.RENAUD/D.SINISI -- 1.57[.062 12 0.15[.006 .09 1 - 2.022 04137 4-192041-0 OBSOLETE С 04114 3 192041 9 OBSOLETE .09 12 0.15 [.006 Α -- 1.57[.062[°] .022 ___ -- 1.57[.062⁻ UNPL 040613-192041-8 OBSOLETE .09 12 0.15 [.006 .022 -- 1.57[.062 .09 UNPL 13 0.12 [.005 04009 3 192041 .016 5-204147 3 192041 6 .09 -- 1.57 [.062] 12 0.12 [.005 .024 **OBSOLETE** 04212 3 192041 5 .09 1 - 212 0.12 [.005 -- 1.57[.062 .024 UNPL 04081 3 192041 4 .09 -- 1.57[.062[°] 12 0.12 [.005 .024 -- 1.02 \(\text{.040} \) 4-2 12 0.12 [.005 04142 3 192041 3 OBSOLETE .08 .022 -- 1.02[.040⁻ .08 3 - 212 0.12 [.005 04006 3-192041-2 OBSOLETE .022 04213 3 192041 Α .08 -- 1.02 [.040] 1 - 212 0.12 [.005 .022 OBSOLETE 04005 3 192041 0 UNPL .08 12 0.12 [.005 Α -- 1.02 [.040[°] .022 3-2 04004 2 192041 9 OBSOLETE .06 12 0.12 [.005 -- 0.63[.025⁻ .018 1 - 215 12 0.20 .008 04168 2 192041 8 .46 .028 LENGTH 8.13 – (FREE DIA) .46 UNPL 15 12 0.20 [.008 04166 2 192041 .028 (LOUVER HEIGHT) [.32]04162 2 192041 (.46 1 - 215 12 0.15 [.006 .030 --2-192041-5 192041 ___ .37 1 - 212 0.15 [.006] 04218 2 192041 .0361 **OBSOLETE** SUPERSEDED BY 193815-4 -- 2-192041- 8.13 SUPERSEDED BY 193815-3 -- 2-192041 [.32]15 SUPERSEDED BY 193815-2 -- 2-192041 SUPERSEDED BY 193815-1 --2-192041-0 SUPERSEDED BY 193262-3 --|1-192041-9 (FEMALE) --1-192941-8 SUPERSEDED BY 193262-2 OBSOLETE (STRIP) SUPERSEDED BY 193262-4 $- \frac{1}{1} \frac{192041}{7}$ <u>/15\</u> C [.028] NOTE 14 3 - 212 0.20 .008 04098 1 192041 6 NOTE 14 12 0.20 [.008 1 - 204149 1 192041 5 .028 **OBSOLETE** NOTE 14 UNPL 12 0.20 [.008 04099 1 192041 .028 NOTE 14 .028] 12| 0.15| .006 NOTE 14 1 - 212 0.15 [.006] .026 12 0.15[.006] 04210 1 192041 NOTE 14 1 - 2.028 12 0.15[.006] NOTE 14 04109 1 192041 0 .028 UNPL 13 0.12 [.005] 1 - 2С NOTE 14 04211 192041-9 .016 15 NOTE 14 3 - 212 0.12 \(\begin{aligned} .005 \end{aligned} \) 192041-8 04148 .026 С UNPL 12 0.12 \(\begin{aligned} .005 \end{aligned} \) 04000 192041 7 .026 NOTE 14 THIS DRAWING IS A CONTROLLED DOCUMENT. ETE. 192041-6 TE Connectivity 07-21-93 **OBSOLETE** Α Α J.TURNER 192041 5 ___ TOLERANCES UNLESS OTHERWISE SPECIFIED: APVD 192041 - CONTACT BAND, ___ ___ PRODUCT SPEC LAIV, FEMALE 192041-± 0.5 [.02] APPLICATION SPEC ± 0.25 [.010] 192041 ___ ___ SIZE CAGE CODE DRAWING NO RESTRICTED TO 1 PLC 192041 A2 00779 C-192041 MATERIAL WEIGHT PLATING NUM (FREE MAT'L SEE TABLE SEE TABLE SCALE 1:1 LENGTH MATING PIN Ø REF PART NO. MAT'L THK LH STYLE (NOTE) LOUV CUSTOMER DRAWING 1 of 2 1471-9 (1/15)

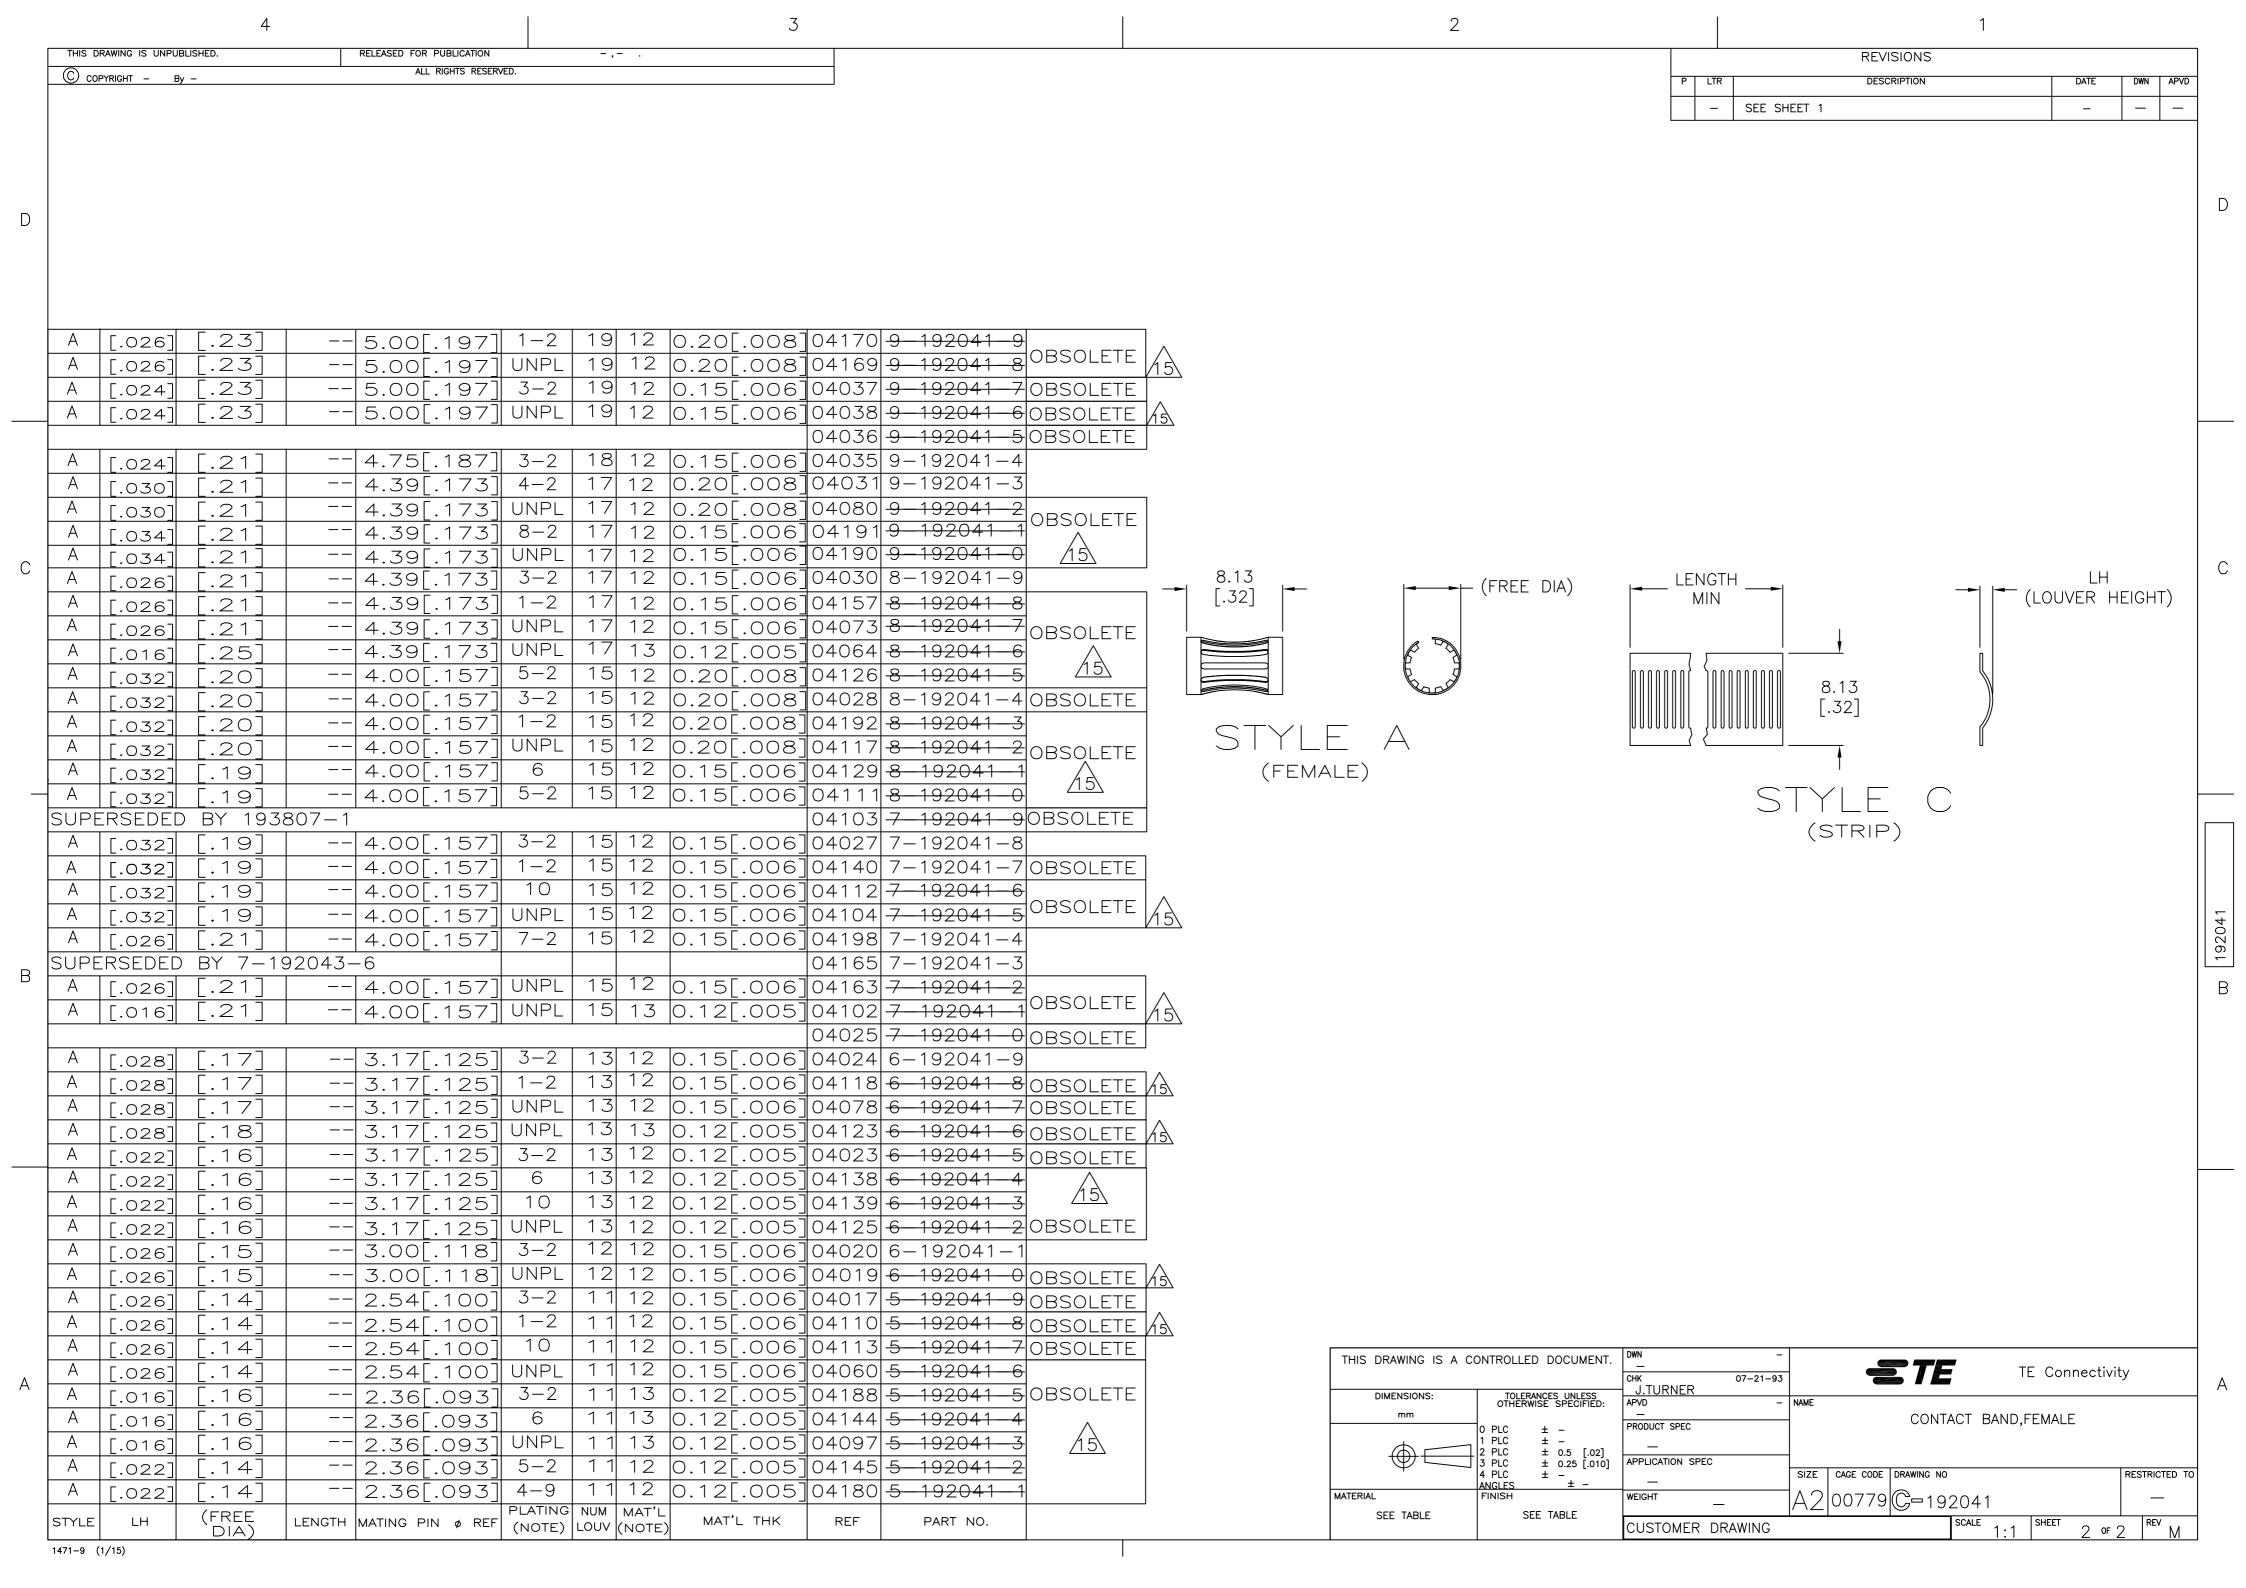

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>TE Connectivity</u>: 6-192041-9