

THIS DRAWING IS UNPUBLISHED.



RELEASED FOR PUBLICATION

19

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
FT	22	P	LTR	DESCRIPTION	DATE	DWN	APVD
			W	REDRAWN W/O CHANGE PER EC 0320-299-97	28 AUG 97	-	-

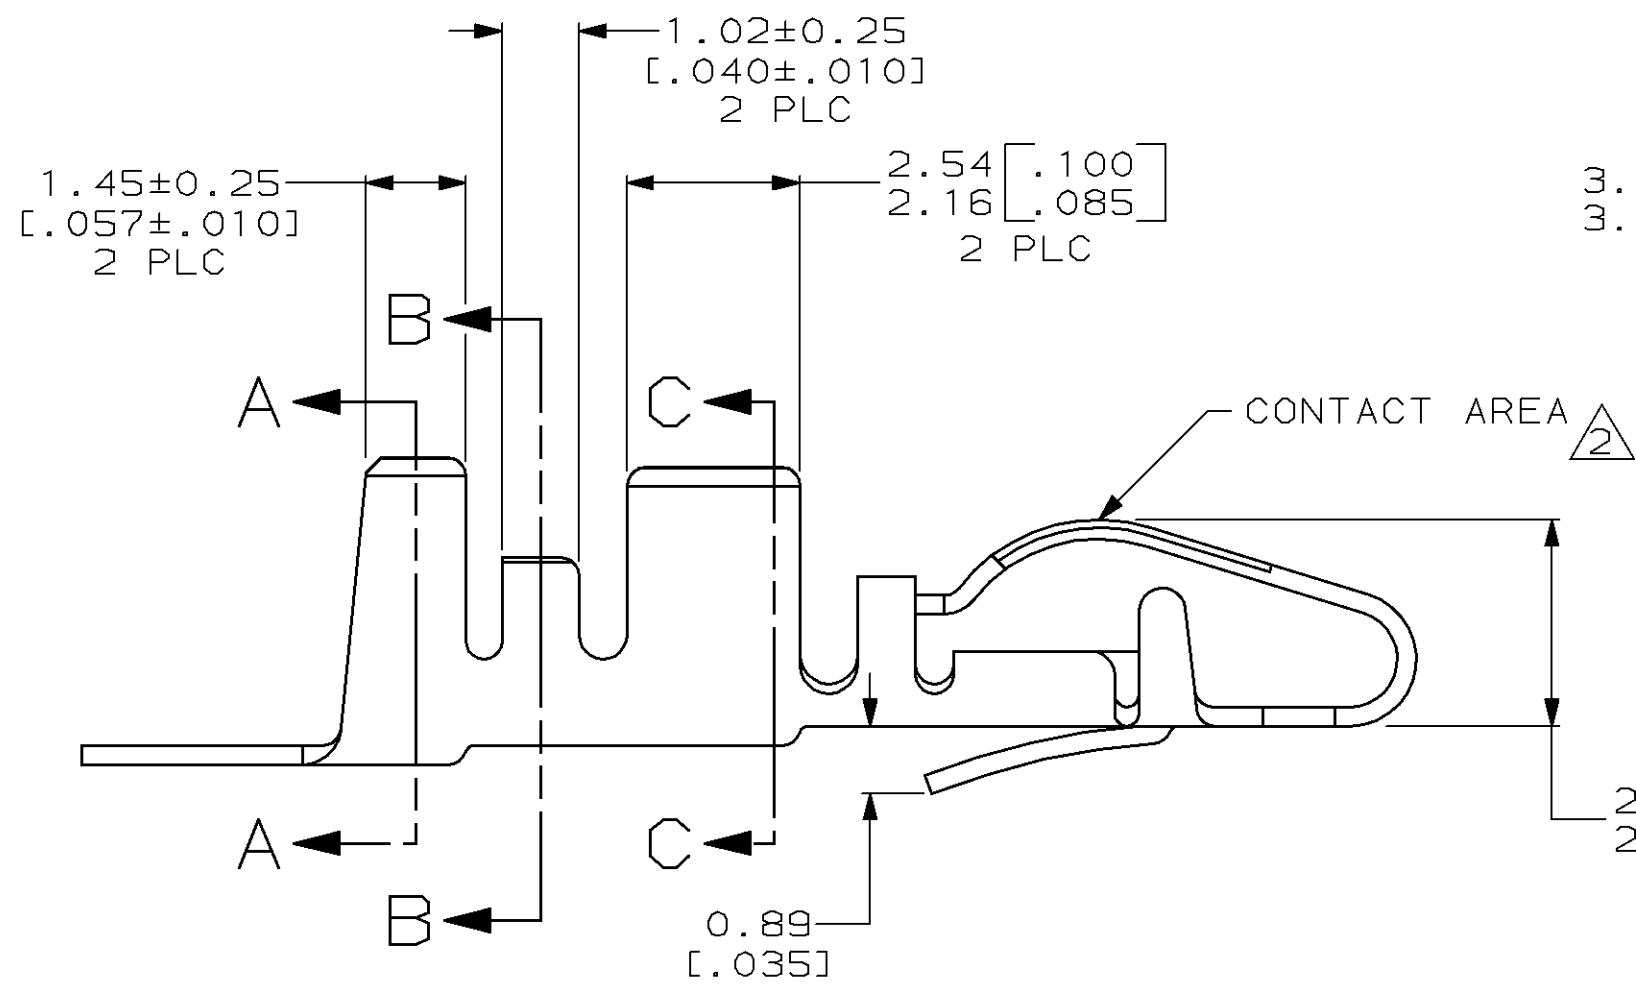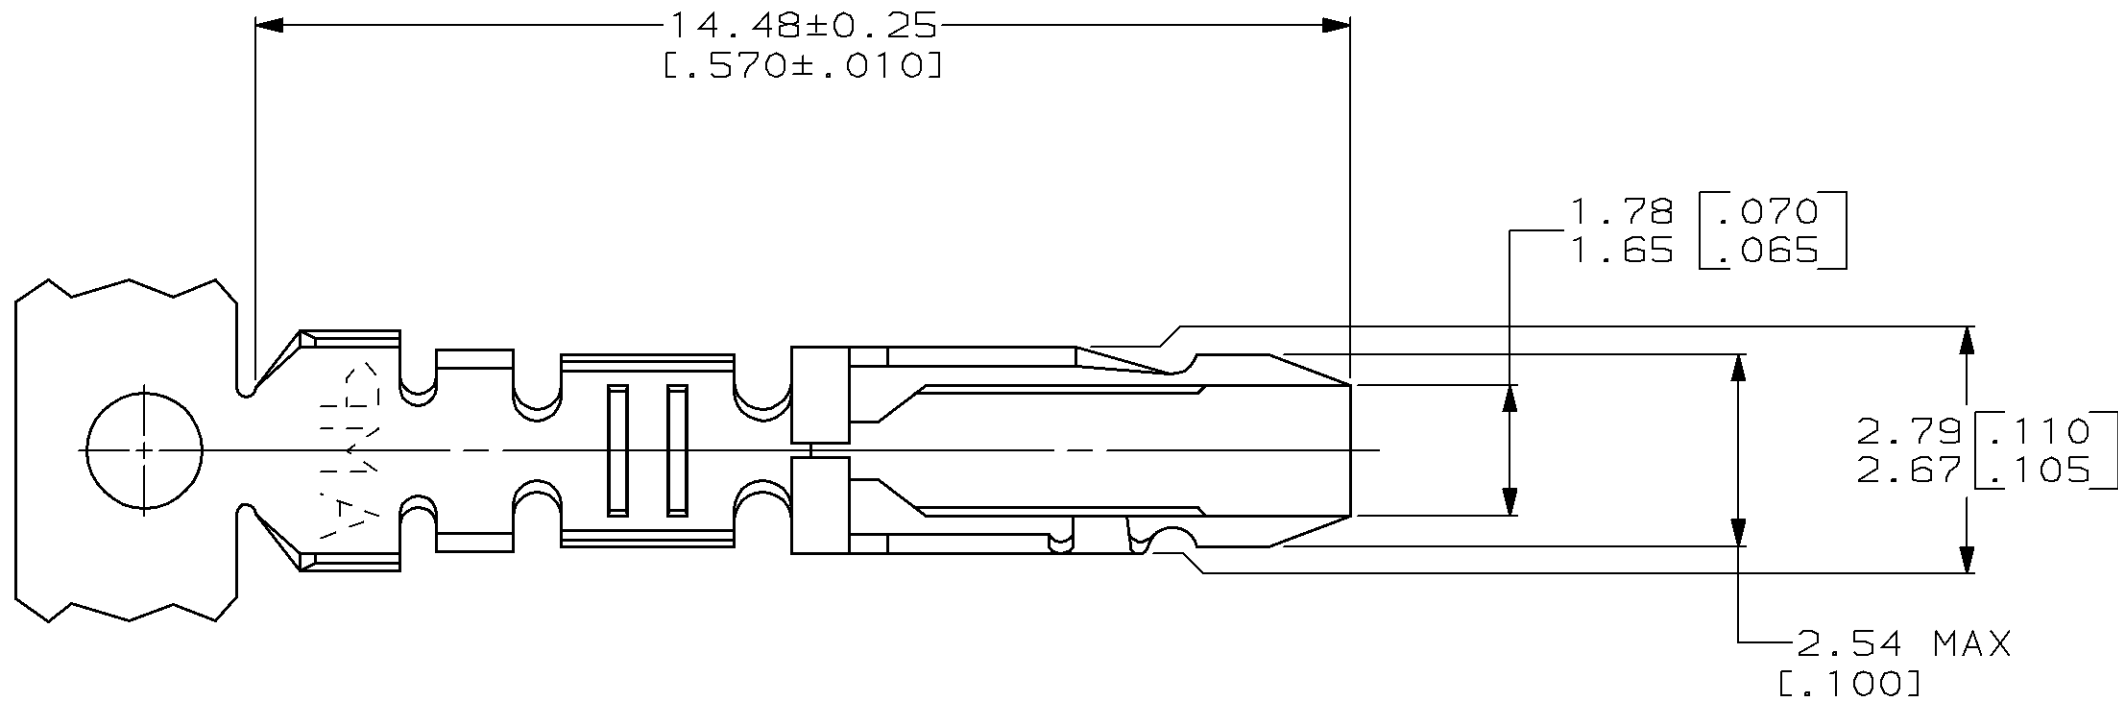


SECTION A-A

SECTION B-B

SECTION C-C

- 1 PHOSPHOR BRONZE.
- 2 0.76µm [.000030] MIN GOLD IN CONTACT AREA, GOLD FLASH ON REMAINDER OF CONTACT, BOTH OVER 1.27µm [.000050] MIN NICKEL.
3. REVERSE REELED (LEFT TO RIGHT FEED), FOR MINI-APPLICATOR.
4. INSULATION RANGE: 2.03 [.080] DIA.

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN D. HARDY	28 AUG 97	AMP AMP Incorporated Harrisburg, PA 17105-3608			
DIMENSIONS: mm [INCHES]			CHK R. STONE	04 SEP 97				
			APVD N. SCHROLL	05 SEP 97	NAME CONTACT, 16 AWG, AMP-LEAF™			
			PRODUCT SPEC -					
			APPLICATION SPEC -					
			-					
MATERIAL ①			FINISH ②		SIZE A2	CAGE CODE 00779	DRAWING NO C- 60151	RESTRICTED TO -
CUSTOMER DRAWING					SCALE 10:1	SHEET 1 OF 1	REV W	