Innovative Service Around the Globe YAGEO

DATA SHEET

METAL OXIDE VARISTORS
POWER SUPPLY

20D series

RoHS compliant & Halogen free

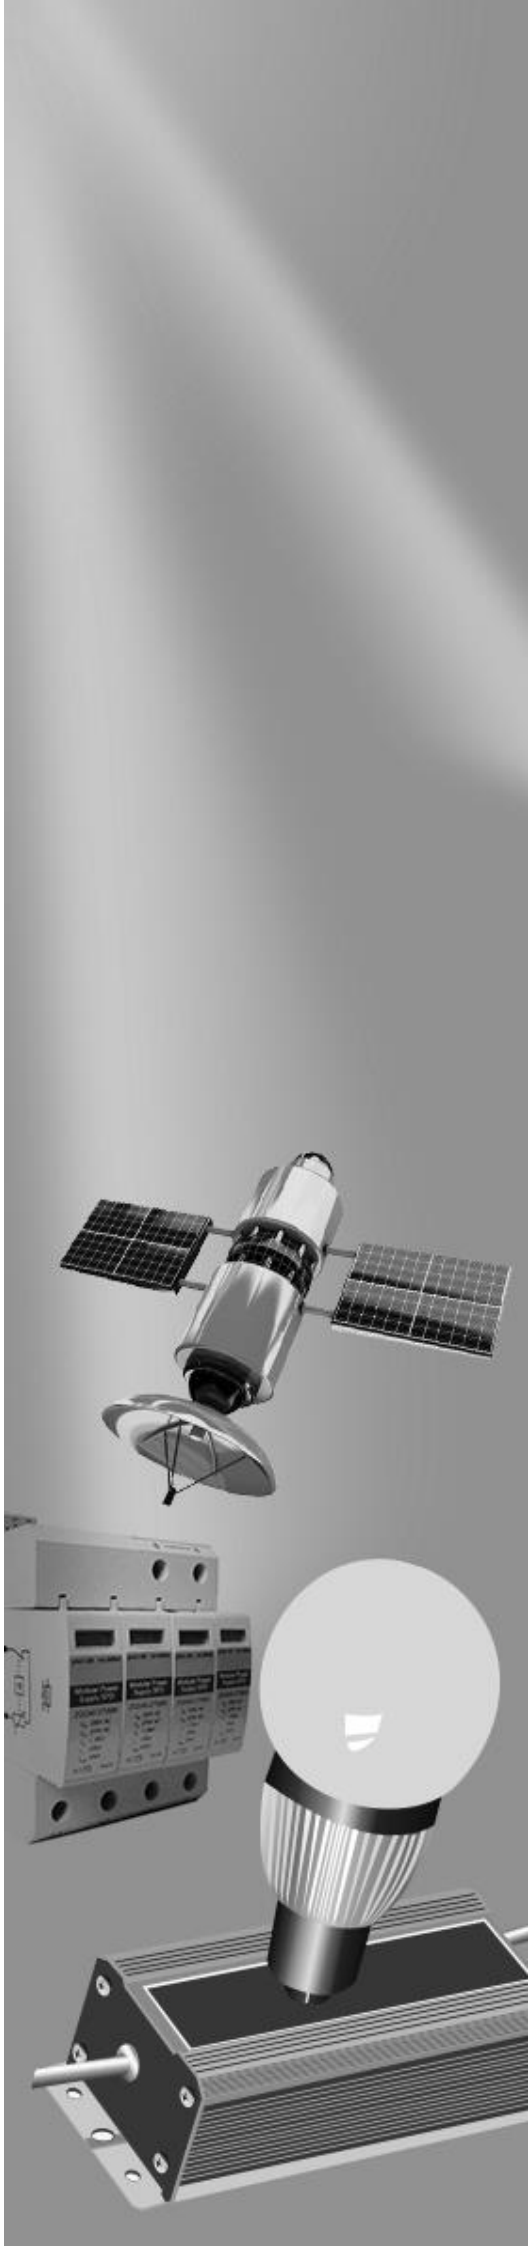

Product specification– April 11, 2022 V.2

Metal Oxide Varistor (MOV) Data Sheet

Features

- Wide operating voltage (V_{1mA}) range from 18V to 1800V
- Fast responding to transient over-voltage
- Large absorbing transient energy capability
- Low clamping ratio and no follow-on current
- Meets MSL level 1, per J-STD-020
- Operating Temperature：-40℃ ~ +105℃
- Storage Temperature：-40℃ ~ +125℃
- Safety certification：UL、CSA、VDE

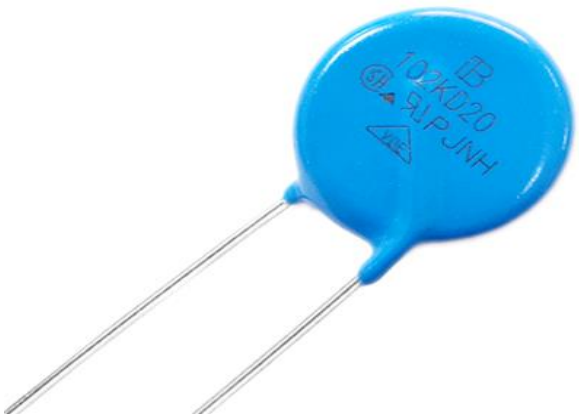

Applications

- Transistor, diode, IC, thyristor or triac semiconductor protection
- Surge protection in consumer electronics
- Surge protection in industrial electronics
- Surge protection in electronic home appliances, gas and petroleum appliances
- Relay and electromagnetic valve surge absorption

Part Number Code

4 7 1 K D 2 0 J — O P7.5 TR

Varistor Voltage
180: 18V
101: 100V
102: 1000V

Tolerance
K: ±10%

Type
D: Disk

Element Diameter
20

Surge Series
No suffix: Standard type
J: High Surge type

Lead Shape
No suffix: Straight leads
O: Outside crimped leads
F: Y Kinked leads

Pitch
No suffix:10mm
P7.5:7.5mm

Packing
No suffix: Bulk
TB: Tape & Box
TR: Tape & Reel

Dimensions

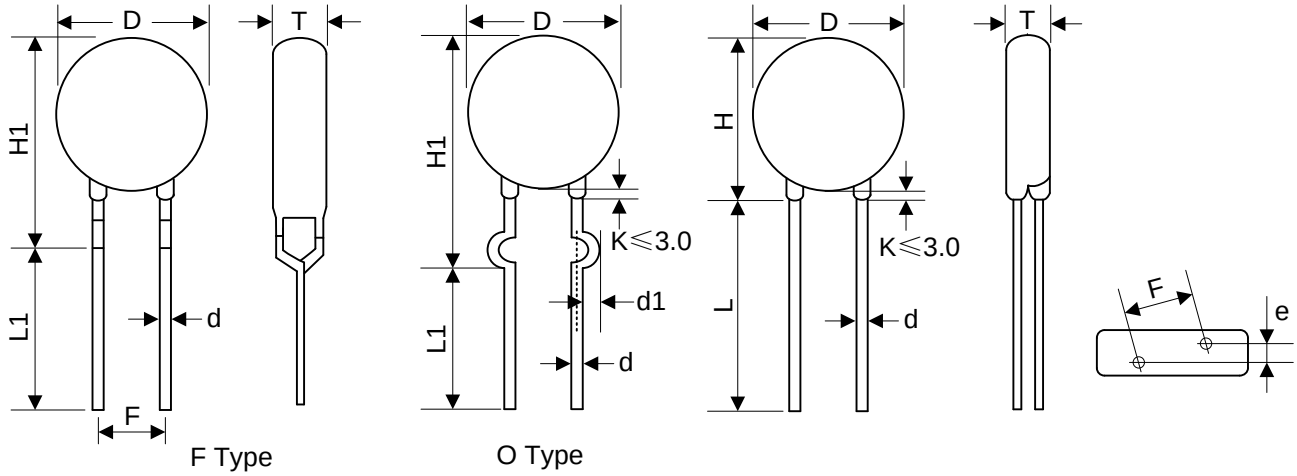

Notes: Varistor voltage≥1200V, structure diagram is F type.

Table 1 Unit: mm	
Symbol	Dimension
H	21.0~26.0
H1	24.0~28.0
L(min.)	20.0
L1(min.)	15.0
D	20.0~23.0
F	7.5±0.8/10.0±1.0
T	Table 2
e(±0.8)	Table 2
d(±0.05)	0.8/1.0
d1(±0.4)	1.4/1.6

Table 2 Unit: mm

Model	T	e	Model	T	e
180K	2.1~4.3	1.7	361K	3.0~5.4	2.9
220K	2.2~4.4	1.8	391K	3.1~5.5	3.0
270K	2.2~4.6	2.0	431K	3.3~5.7	3.2
330K	2.3~4.8	1.9	471K	3.4~6.0	3.4
390K	2.2~4.5	2.0	511K	3.5~6.2	3.6
470K	2.3~4.7	2.1	561K	3.7~6.5	3.8
560K	2.4~5.0	2.3	621K	3.9~6.8	4.1
680K	2.5~5.3	2.6	681K	4.1~7.1	4.4
820K	2.2~4.5	2.0	751K	4.4~7.5	4.5
101K	2.5~4.6	2.2	781K	4.5~7.7	4.6
121K	2.5~4.8	2.4	821K	4.7~7.9	4.8
151K	2.3~4.5	2.0	911K	4.9~8.1	5.2
181K	2.4~4.6	2.1	102K	5.5~8.6	5.2
201K	2.5~4.7	2.2	112K	5.9~9.1	5.6
221K	2.6~4.8	2.3	122K	6.0~9.7	6.0
241K	2.7~4.9	2.4	142K	7.0~11.2	6.8
271K	2.7~5.0	2.6	162K	7.5~11.8	7.6
301K	2.8~5.0	2.7	182K	7.7~12.8	8.4
331K	2.8~5.2	2.7			

Electrical Characteristics

Part Number		Maximum Allowable Voltage		Varistor Voltage	Maximum Clamping Voltage		Withstanding Surge Current		Maximum Energy (10/1000μs)		Rated Power	Typical Capacitance (Reference)
Standard	High Surge	V_{AC} (V)	V_{DC} (V)	V_{1mA}(V)	I_P (A)	V_C (V)	I (A) Standard	I (A) High Surge	(J) Standard	(J) High Surge	(W)	@1KHz (pf)
180KD20	180KD20J	11	14	18(15~21.6)	20	36	2000	3000	11	13	0.2	28500
220KD20	220KD20J	14	18	22(19.5~26)	20	43	2000	3000	14	16	0.2	18500
270KD20	270KD20J	17	22	27(24~31)	20	53	2000	3000	16	19	0.2	13000
330KD20	330KD20J	20	26	33(29.5~36.5)	20	65	2000	3000	23	24	0.2	11500
390KD20	390KD20J	25	31	39(35~43)	20	77	2000	3000	26	28	0.2	8500
470KD20	470KD20J	30	38	47(42~52)	20	93	2000	3000	30	34	0.2	7400
560KD20	560KD20J	35	45	56(50~62)	20	110	2000	3000	38	44	0.2	6500
680KD20	680KD20J	40	56	68(61~75)	20	135	2000	3000	41	49	0.2	5800
820KD20	820KD20J	50	65	82(74~90)	100	135	6500	10000	45	56	1.0	4900
101KD20	101KD20J	60	85	100(90~110)	100	165	6500	10000	50	70	1.0	4000
121KD20	121KD20J	75	100	120(108~132)	100	200	6500	10000	55	85	1.0	3300
151KD20	151KD20J	95	125	150(135~165)	100	250	6500	10000	70	106	1.0	2700
181KD20	181KD20J	115	150	180(162~198)	100	300	6500	10000	85	130	1.0	2200
201KD20	201KD20J	130	170	200(180~220)	100	340	6500	10000	95	140	1.0	2000
221KD20	221KD20J	140	180	220(198~242)	100	360	6500	10000	100	155	1.0	1800
241KD20	241KD20J	150	200	240(216~264)	100	395	6500	10000	108	168	1.0	1650
271KD20	271KD20J	175	225	270(243~297)	100	455	6500	10000	127	190	1.0	1500
301KD20	301KD20J	190	250	300(270~330)	100	500	6500	10000	136	210	1.0	1300
331KD20	331KD20J	210	275	330(297~363)	100	550	6500	10000	150	228	1.0	1200
361KD20	361KD20J	230	300	360(324~396)	100	595	6500	10000	163	255	1.0	1100
391KD20	391KD20J	250	320	390(351~429)	100	650	6500	10000	180	275	1.0	1000
431KD20	431KD20J	275	350	430(387~473)	100	710	6500	10000	190	305	1.0	930
471KD20	471KD20J	300	385	470(423~517)	100	775	6500	10000	204	350	1.0	850
511KD20	511KD20J	320	415	510(459~561)	100	845	6500	10000	210	360	1.0	780
561KD20	561KD20J	350	460	560(504~616)	100	925	6500	10000	215	380	1.0	710
621KD20	621KD20J	385	505	620(558~682)	100	1025	6500	10000	224	390	1.0	650
681KD20	681KD20J	420	560	680(612~748)	100	1120	6500	10000	230	400	1.0	600
751KD20	751KD20J	460	615	750(675~825)	100	1240	6500	10000	255	420	1.0	530
781KD20	781KD20J	485	640	780(702~858)	100	1290	6500	10000	265	440	1.0	510
821KD20	821KD20J	510	670	820(738~902)	100	1355	6500	10000	282	460	1.0	500
911KD20	911KD20J	550	745	910(819~1001)	100	1500	6500	10000	310	510	1.0	440
102KD20	102KD20J	625	825	1000(900~1100)	100	1650	6500	10000	342	565	1.0	400
112KD20	112KD20J	680	895	1100(990~1210)	100	1815	6500	10000	383	620	1.0	360
122KD20	122KD20J	750	990	1200(1080~1320)	100	1980	6500	10000	408	660	1.0	350
142KD20	142KD20J	880	1140	1400(1260~1540)	100	2310	6500	10000	532	784	1.0	340
162KD20	162KD20J	1000	1280	1600(1440~1760)	100	2640	6500	10000	606	896	1.0	330
182KD20	182KD20J	1100	1465	1800(1620~1980)	100	2970	6500	10000	625	990	1.0	320

Notes: 1. The tolerance of varistor voltage between 18V and 27V is more than 10%;
2. Varistor voltage⩾1200V, structure diagram is F type;
3. Leakage Current (@83% of V_{1mA})：IR≤50μA (180K~680K) ; IR≤25μA (820K~182K).

Maximum Surge Current Derating Curve

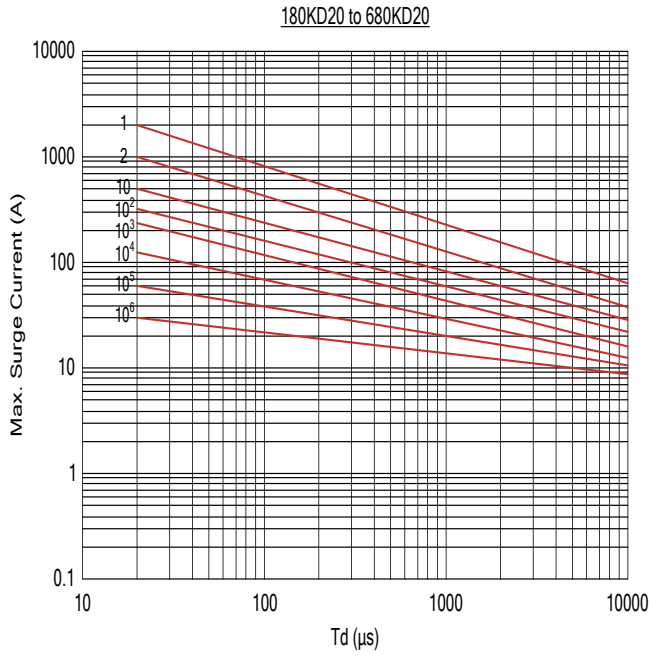

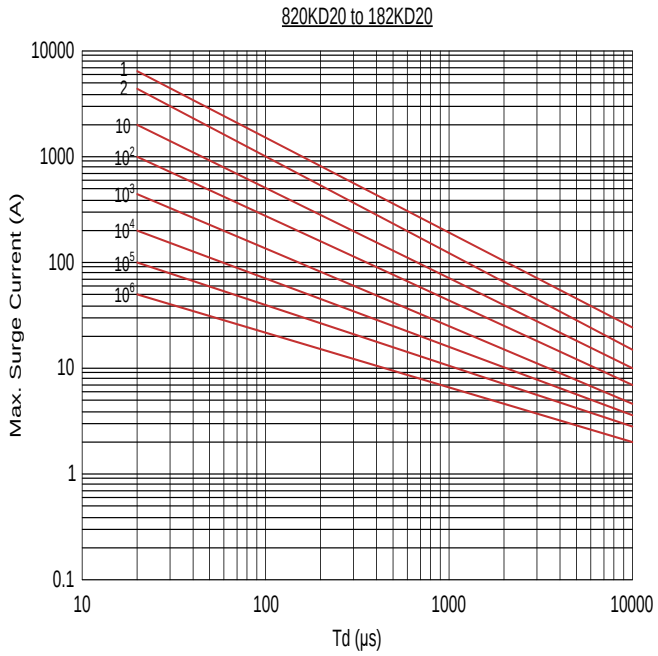

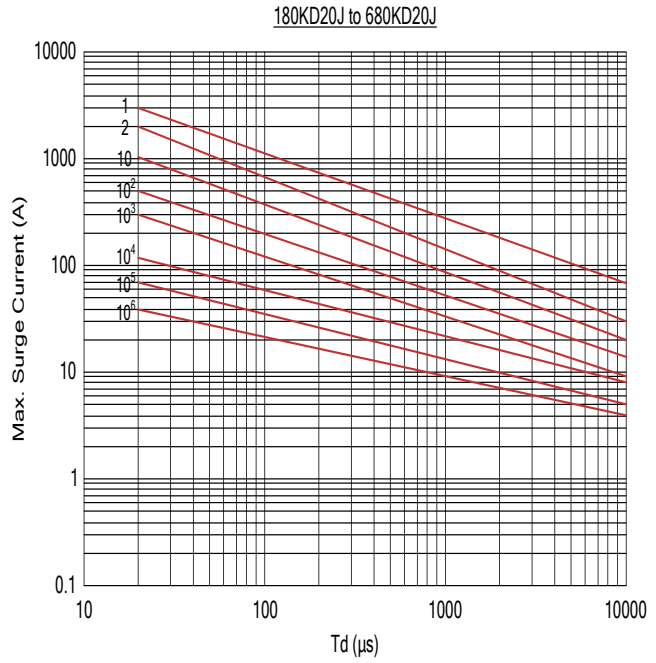

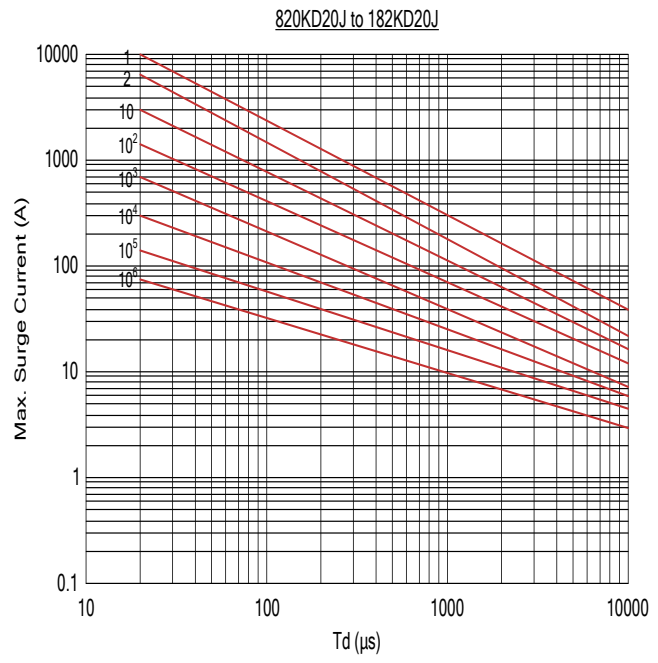

Maximum Leakage Current and Maximum Clamping Voltage Curve

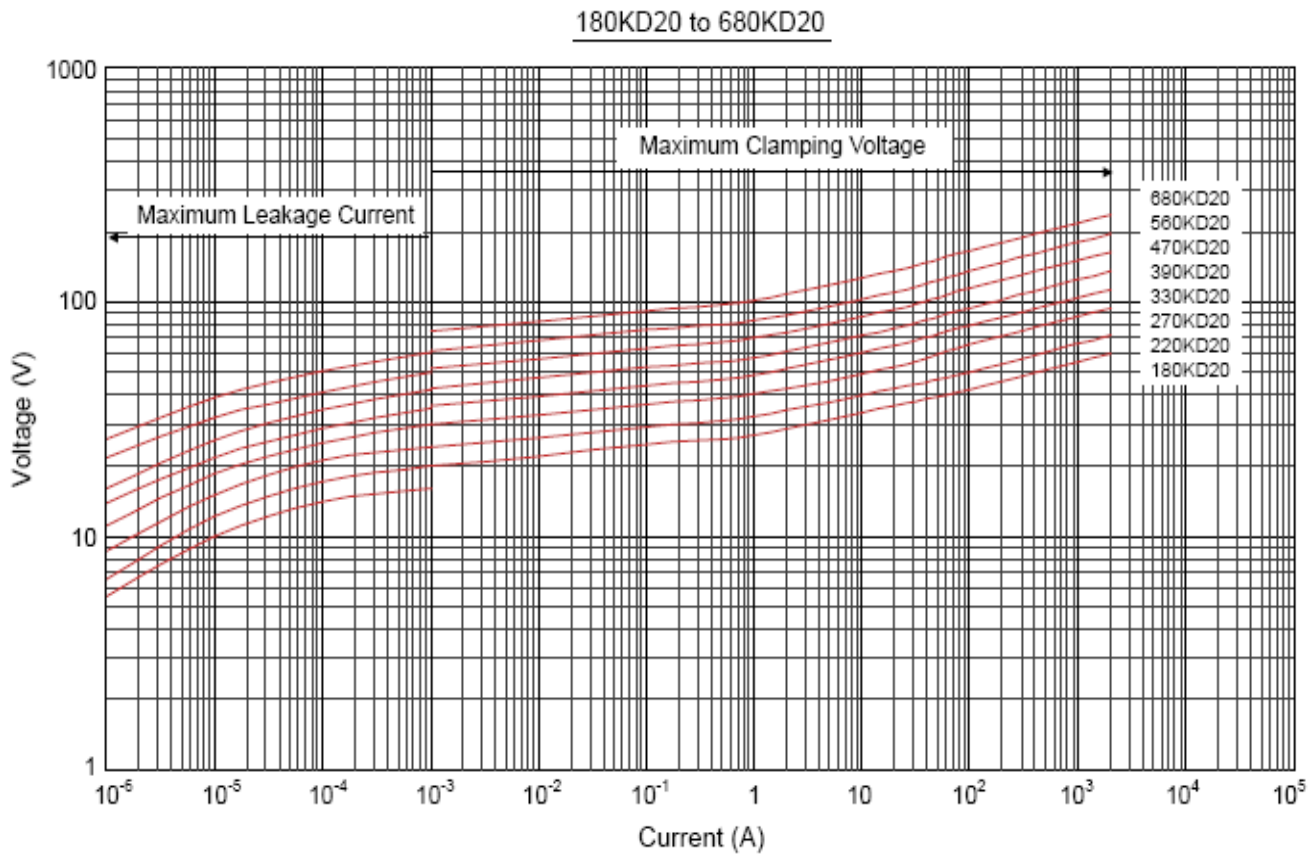

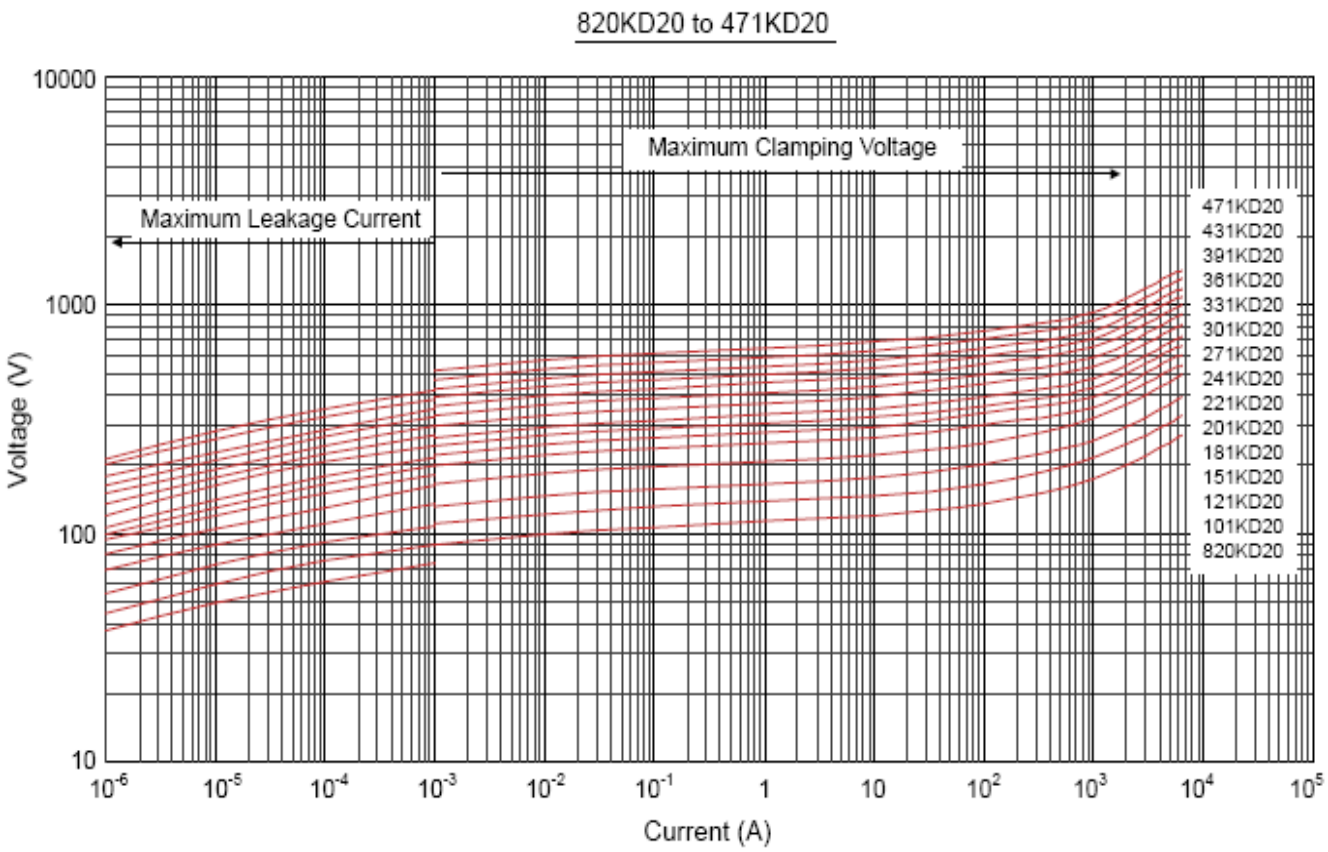

Maximum Leakage Current and Maximum Clamping Voltage Curve

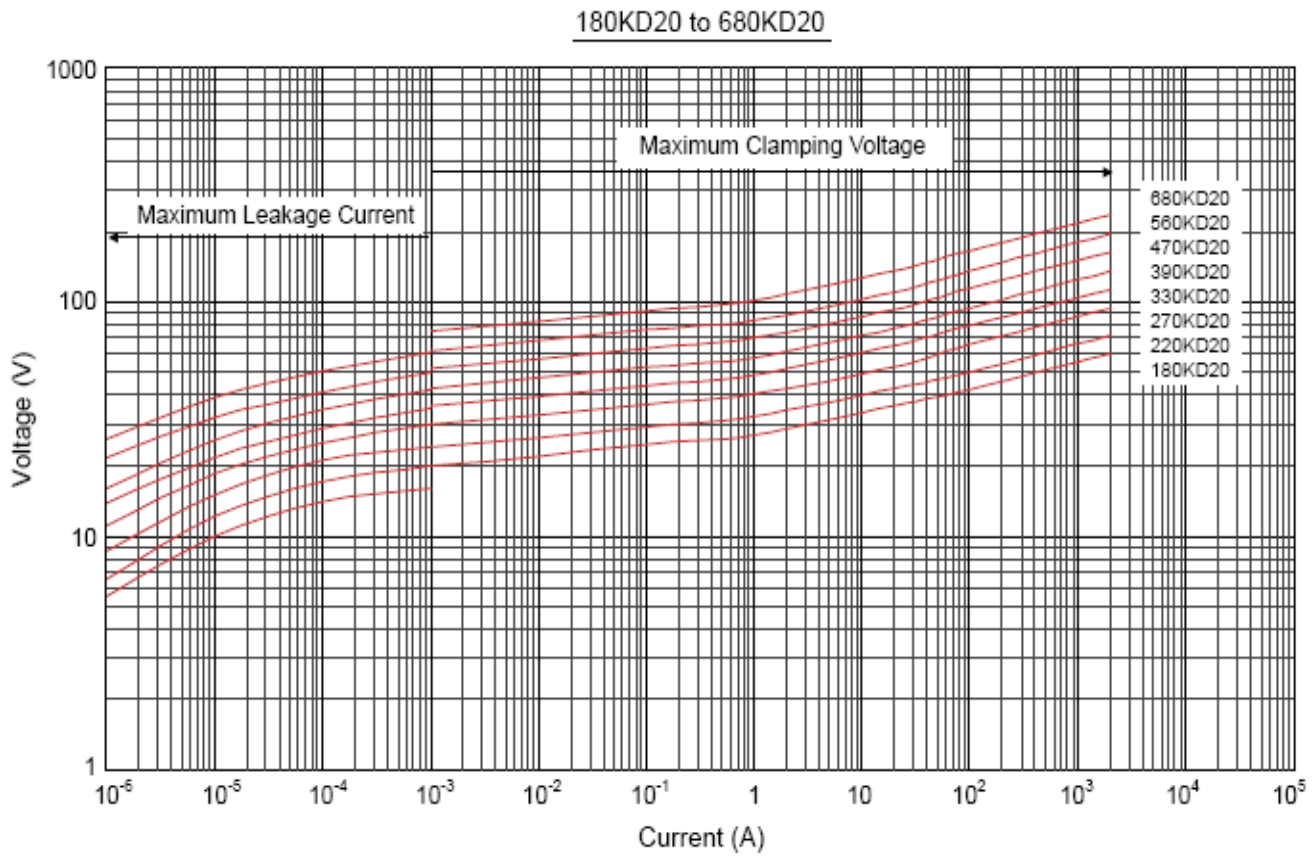

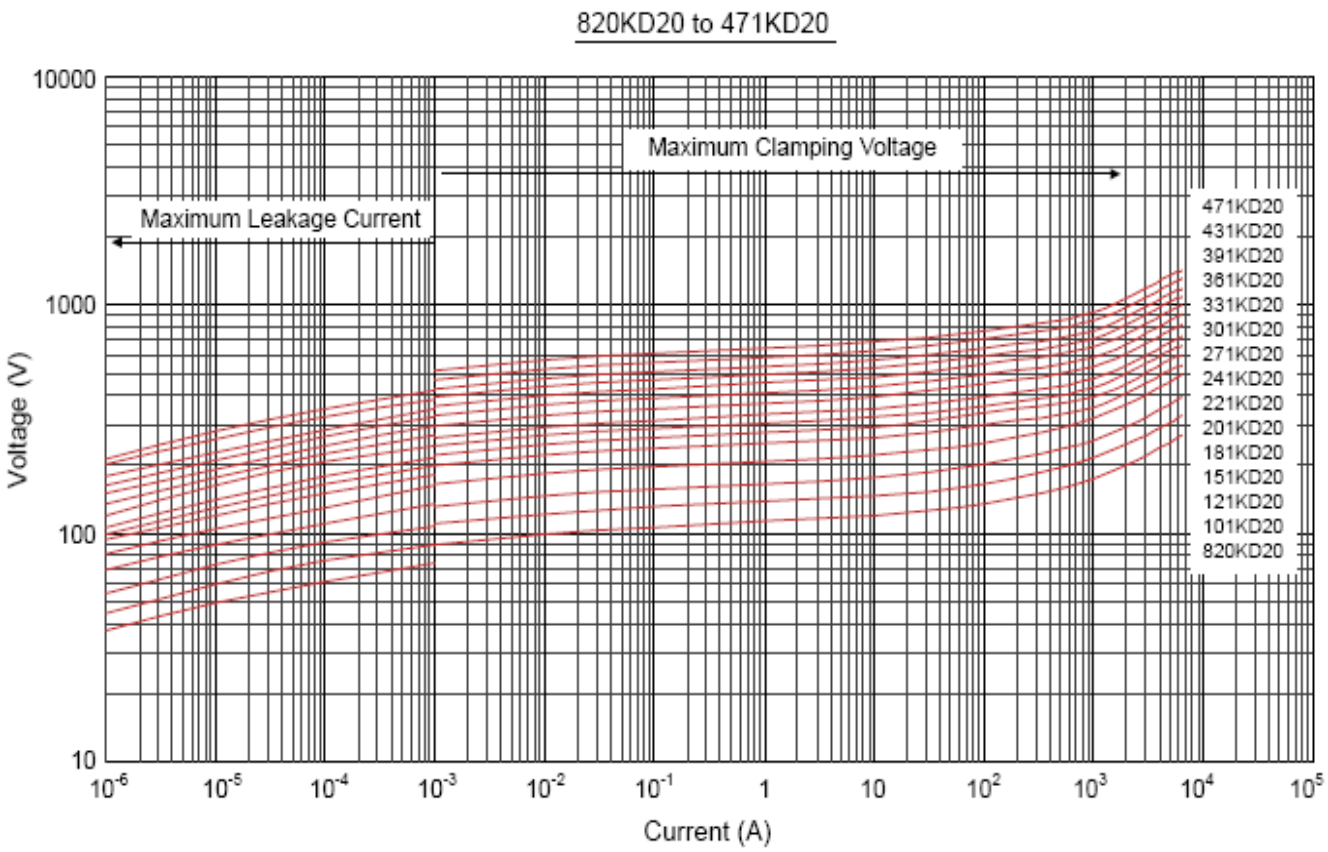

Maximum Leakage Current and Maximum Clamping Voltage Curve

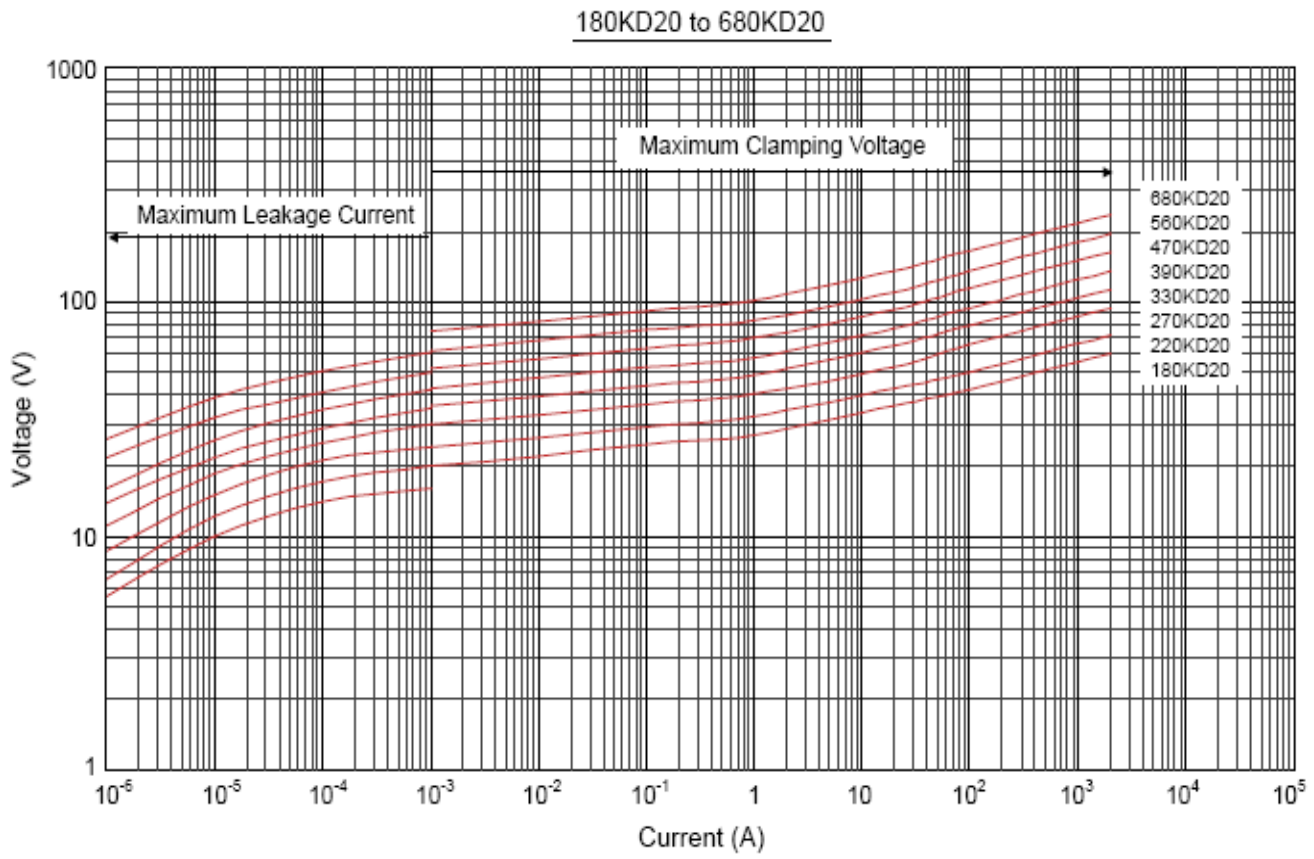

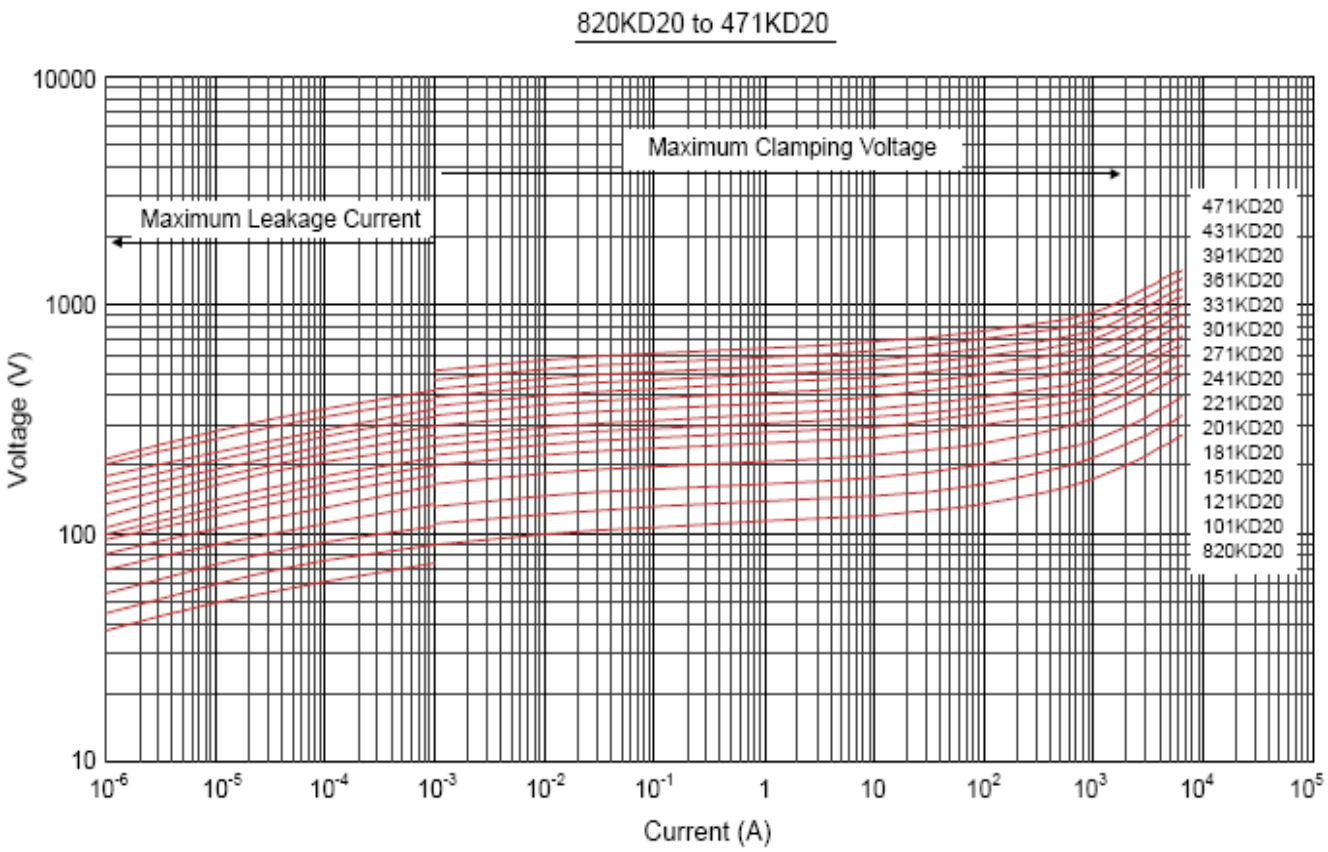

Reliability

<table>
<tr><th>Items</th><th>Standard</th><th>Test conditions / Methods</th><th>Specifications</th></tr>
<tr><td>Tensile Strength of Terminals</td><td>IEC60068-2-21</td><td>Gradually applying the force specified and keeping the unit fixed for 10±1 sec.
<table><tr><th>Terminal diameter (mm)</th><th>Force (kg)</th></tr><tr><td>0.5＜d≤0.8</td><td>1.0</td></tr><tr><td>0.8＜d≤1.25</td><td>2.0</td></tr><tr><td>1.25＜d</td><td>4.0</td></tr></table></td><td>No visible damage
$|\Delta V_{1mA}/V_{1mA}|\leq 5\%$</td></tr>
<tr><td>Bending Strength of Terminals</td><td>IEC60068-2-21</td><td>Hold specimen and apply the force specified below to each lead. Bend the specimen to 90°, then return to the original position. Repeat the procedure in the opposite direction.
<table><tr><th>Terminal diameter (mm)</th><th>Force (kg)</th></tr><tr><td>0.5＜d≤0.8</td><td>0.5</td></tr><tr><td>0.8＜d≤1.25</td><td>1.0</td></tr><tr><td>1.25＜d</td><td>2.0</td></tr></table></td><td>No visible damage
$|\Delta V_{1mA}/V_{1mA}|\leq 5\%$</td></tr>
<tr><td>Vibration</td><td>IEC60068-2-6</td><td>Frequency range: 10~55 Hz
Amplitude: 0.75mm or 98m/s^2
Direction: 3 mutually perpendicular directions, 2hrs each.</td><td>No visible damage
$|\Delta V_{1mA}/V_{1mA}|\leq 5\%$</td></tr>
<tr><td>Solderability</td><td>IEC60068-2-20</td><td>Solder Temp: 245±5℃
Dipping Time: 2±0.5 sec</td><td>At least 95% of terminal electrode is covered by new solder</td></tr>
<tr><td>Resistance to Soldering Heat</td><td>IEC60068-2-20</td><td>Solder Temp: 260±5℃
Dipping Time: 10±1 sec</td><td>No visible damage
$|\Delta V_{1mA}/V_{1mA}|\leq 5\%$</td></tr>
<tr><td>High Temperature Storage</td><td>IEC60068-2-2</td><td>Ambient Temp: 125±2℃
Duration: 1000±24hrs</td><td>No visible damage
$|\Delta V_{1mA}/V_{1mA}|\leq 5\%$</td></tr>
<tr><td>Low Temperature Storage</td><td>IEC60068-2-1</td><td>Ambient Temp: -40±2℃
Duration: 1000±24hrs</td><td>No visible damage
$|\Delta V_{1mA}/V_{1mA}|\leq 5\%$</td></tr>
<tr><td>Damp Heat, Steady State</td><td>IEC60068-2-78</td><td>The test is divided into two groups .
a. 40±2℃ , 90~95% RH for 1344±24hrs
b. 40±2℃ , 90~95% RH,at 10%VDC ,1344±24 hrs</td><td>No visible damage
$|\Delta V_{1mA}/V_{1mA}|\leq 10\%$
Insulation Resistance≧100MΩ</td></tr>
<tr><td>High Temperature Load</td><td>MIL-STD-202 Method 108</td><td>Ambient Temp: 105±2℃ Duration: 1000±24hrs
Load: Max. Allowable Voltage In AC.</td><td>$|\Delta V_{1mA}/V_{1mA}|\leq 10\%$</td></tr>
<tr><td>Temperature Cycle</td><td>IEC60068-2-14</td><td>The conditions shown below shall be repeated 5 cycles
<table><tr><th>Step</th><th>Temperature (℃)</th><th>Period (minutes)</th></tr><tr><td>1</td><td>-40±3</td><td>30±3</td></tr><tr><td>2</td><td>Room temperature</td><td>5±3</td></tr><tr><td>3</td><td>125±3</td><td>30±3</td></tr><tr><td>4</td><td>Room temperature</td><td>5±3</td></tr></table></td><td>No visible damage
$|\Delta V_{1mA}/V_{1mA}|\leq 5\%$</td></tr>
<tr><td>8/20uS Surge Life</td><td>IEC61051-1</td><td>8/20µS waveform,10 surge currents, unipolar, interval 30secs,amplitude corresponding to max. surge current derating curves for 20µS.</td><td>No visible damage
△Vb(1mA)≦±10%</td></tr>
<tr><td>10/1000µS Surge Life</td><td>IEC61051-1</td><td>10/1000µS waveform,10 surge currents, unipolar, interval 2mins,amplitude corresponding to max. surge current derating curves for 1000µS.</td><td>No visible damage
$|\Delta V_{1mA}/V_{1mA}|\leq 10\%$</td></tr>
<tr><td>Voltage Proof</td><td>IEC61051-1</td><td>Metal balls method, 2500Vac 1 min.</td><td>No visible damage</td></tr>
</table>

Soldering Recommendation

Lead-free Wave Soldering Recommendation

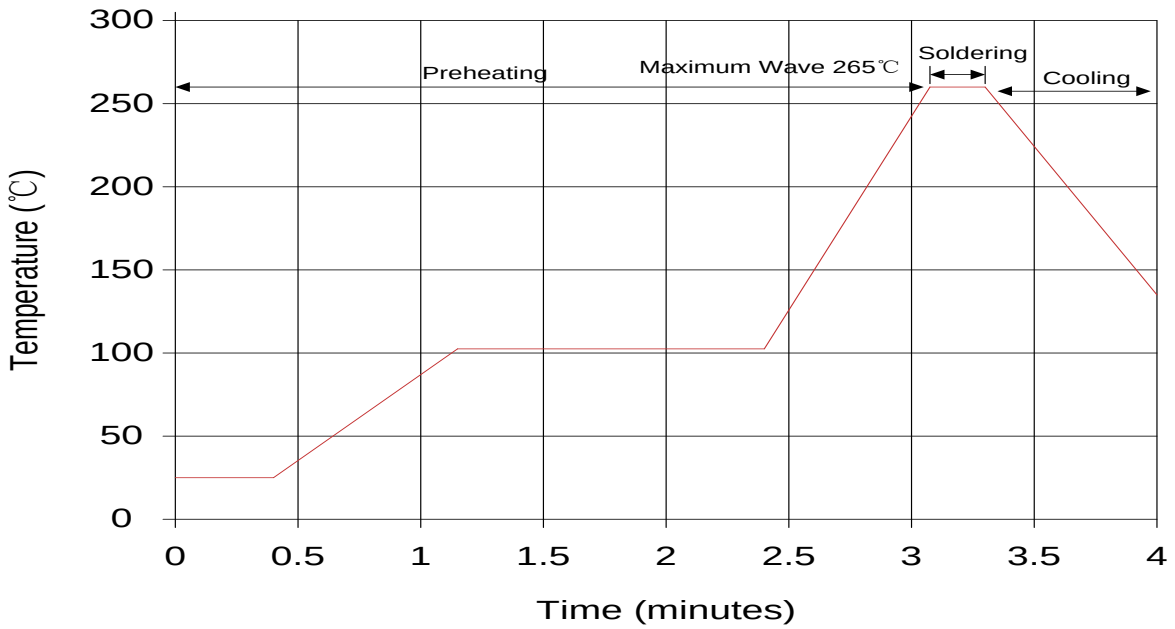

Item	Conditions
Peak Temperature	265℃
Dipping Time	10 seconds (max.)
Soldering	1 time

Recommendation Reworking Conditions with Soldering Iron

Item	Conditions
Temperature of Soldering Iron-tip	360℃ (max.)
Soldering Time	3 seconds (max.)
Distance from Varistor	2mm (min.)

Marking Code

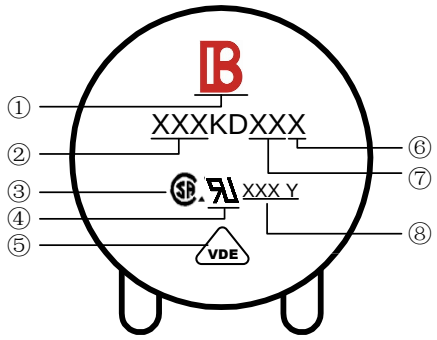

① Brightking Logo
② Varistor Voltage
③ CSA Accreditation Logo
④ UL Accreditation Logo
⑤ VDE Accreditation Logo
⑥ “J” is High Surge Code, no “J” is Standard Surge
⑦ Disk Size
⑧ Internal control code

Taping Dimensions

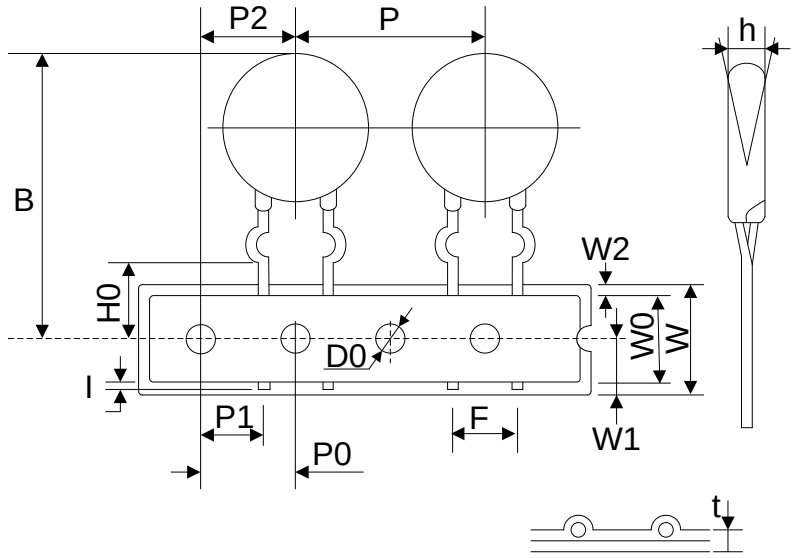

Symbol	Dimension (mm)
P	25.4±1.0
P0	12.7±1.0
P1	8.95/7.7±0.7
P2	12.7±1.3
F	7.5±0.8/10.0±1.0
h	0±4
W	18.0±1.0
W0	12.0±1.0
W1	9.0±0.5
W2	3.0max
H0	16.0±1.0
I	2.0max
D0	4.0±0.2
t	0.6±0.3
B	45max

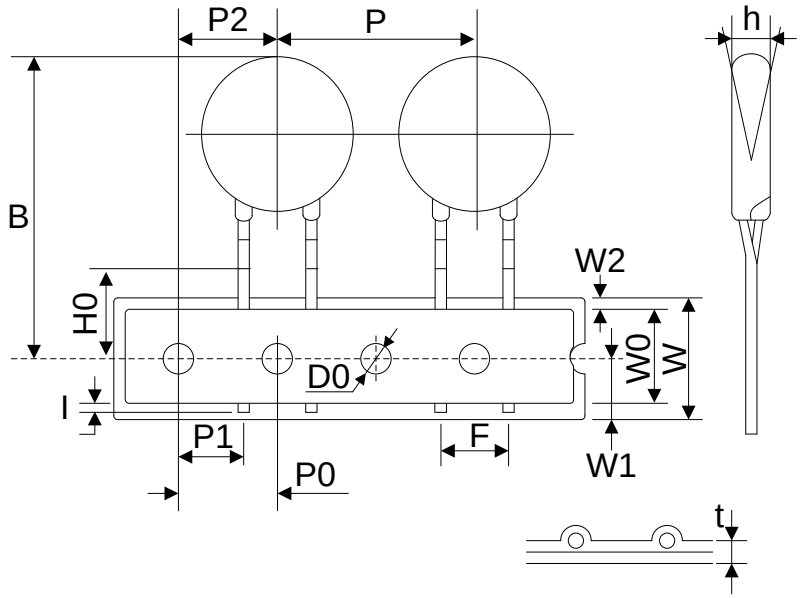

Symbol	Dimension (mm)
P	25.4±1.0
P0	12.7±1.0
P1	8.95/7.7±0.7
P2	12.7±1.3
F	7.5±0.8/10.0±1.0
h	0±4
W	18.0±1.0
W0	12.0±1.0
W1	9.0±0.5
W2	3.0max
H0	16.0±1.0
I	2.0max
D0	4.0±0.2
t	0.6±0.3
B	45max

Taping Dimensions

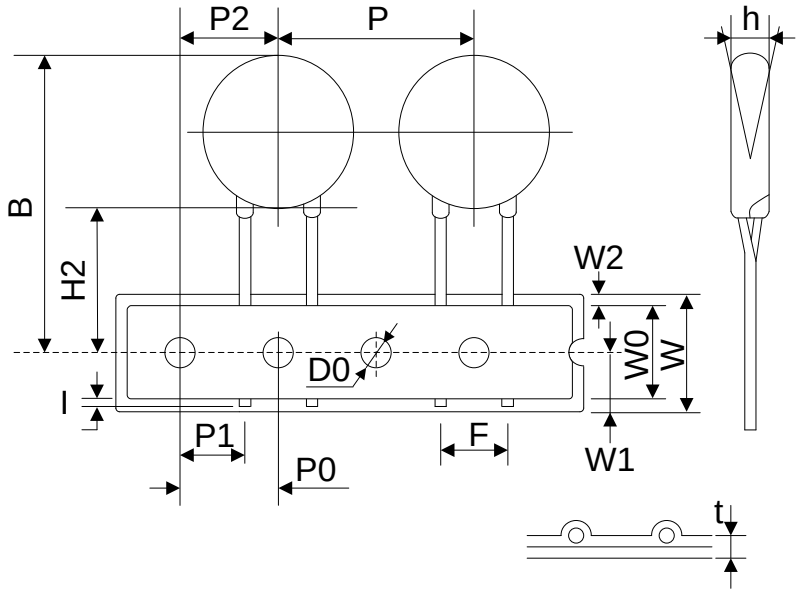

Symbol	Dimension (mm)
P	25.4±1.0
P0	12.7±1.0
P1	8.95/7.7±0.7
P2	12.7±1.3
F	7.5±0.8/10.0±1.0
h	0±4
W	18.0±1.0
W0	12.0±1.0
W1	9.0±0.5
W2	3.0max
H2	20.0±2.0
I	2.0max
D0	4.0±0.2
t	0.6±0.3
B	45max

Quantit

Packaging Dimensions (Unit: mm)	Quantity
In bulk for Terminals Untrimmed Products 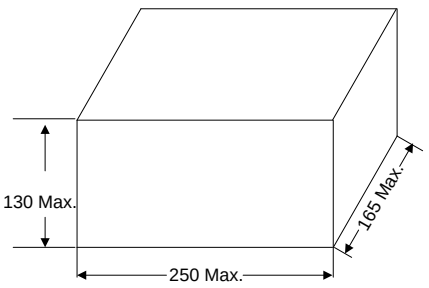	250pcs/bag 4bags/box (180K~301K)
	200pcs/bag 4bags/box (331K~561K)
	150pcs/bag 4bags/box (621K~112K)
	100pcs/bag 4bags/box (122K~182K)

Quantit

Packaging Dimensions (Unit: mm)	Quantity
In bulk for Terminals Trimmed Products	250pcs/bag 2bags/box (180K~301K)
	200pcs/bag 2bags/box (331K~561K)
	150pcs/bag 2bags/box (621K~112K)
	100pcs/bag 2bags/box (122K~182K)
Packaging Dimensions (Unit: mm)	**Quantity**
Tape & Box & P0=12.7mm 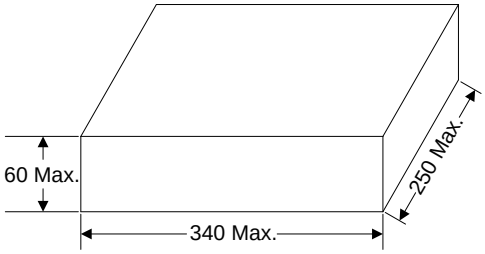	400pcs/box (180K~301K)
	300pcs/box (331K~561K)
Tape & Reel & P0=12.7mm 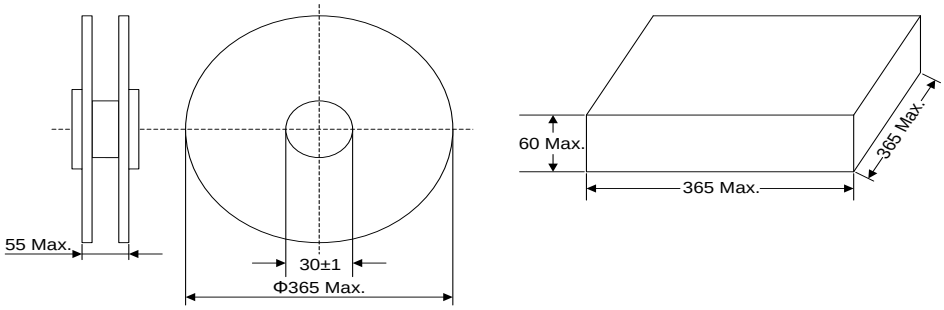	400pcs/box (180K~301K)
	300pcs/box (331K~561K)

Storage Condition of Products

(I) Storage Conditions :

1.Storage Temperature : -10℃ ~ +40℃

2.Relative Humidity : ≦80%RH

3.Keep away from corrosive atmosphere and sunlight.

(II) Period of Storage : 1 year

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

YAGEO:

681KD20 511KD20 621KD20 911KD20 241KD20 101KD20 201KD20 271KD20 391KD20 431KD20 471KD20 112KD20 470KD20 511KD20J 561KD20 751KD20 820KD20 821KD20 271KD20J-OP7.5TB 220KD20J-P7.5TB 220KD20J-OP7.5 112KD20-OP7.5 470KD20-OTB 331KD20J-OP7.5TR 820KD20J-P7.5TR 470KD20-OP7.5TR 560KD20J-OTB 270KD20-FP7.5TB 240KD20-OP7.5TB 201KD20J-O 201KD20-OP7.5TR 391KD20J-FP7.5TB 270KD20J-TB 240KD20J-FP7.5TB 241KD20J 680KD20-FP7.5 221KD20J-FP7.5TR 751KD20-O 151KD20-OP7.5 241KD20J-TR 820KD20J-OTR 181KD20J-OP7.5TB 560KD20-FP7.5TR 621KD20J-FP7.5 151KD20J-FP7.5 331KD20J-P7.5TR 330KD20-OTR 271KD20-OP7.5TB 390KD20-FP7.5TR 220KD20-FP7.5 330KD20-P7.5TR 361KD20J-OTB 511KD20-FTB 470KD20J-O 390KD20J-OTB 201KD20J-FTR 361KD20J-P7.5 241KD20J-FP7.5 102KD20J-OP7.5 142KD20-P7.5 331KD20-OTR 680KD20J-OTR 182KD20J-OP7.5 560KD20-FP7.5TB 390KD20-F 101KD20-OTR 680KD20-OP7.5TR 821KD20J-P7.5 181KD20J-P7.5TR 331KD20J-FTR 680KD20J-P7.5TR 431KD20J-FP7.5TB 220KD20-OP7.5 271KD20J-P7.5TB 561KD20J-OTR 240KD20J-TR 301KD20-TR 181KD20-P7.5TR 330KD20J 471KD20J-OP7.5TR 470KD20J-P7.5 240KD20J-OP7.5TB 240KD20-P7.5TR 180KD20-P7.5TR 560KD20-OTR 270KD20J-OP7.5 122KD20-F 471KD20-TB 680KD20J-O 271KD20J-FTB 561KD20-TR 331KD20J-OP7.5 560KD20-OTB 680KD20J-FTR 820KD20-OTR 330KD20-FTR 820KD20-TR 471KD20-FP7.5 391KD20J-OTB 201KD20J-P7.5TR