


Δ



Figure 1 is a graph showing the temperature profile of the sample during the experiment. The Y-axis is labeled "TEMP (°C)" and ranges from 100 to 250. The X-axis is labeled "TIME (s)". The profile shows a heating phase (upward curve) and a cooling phase (downward curve). Key temperatures marked are 180, 230, and 30 ± 10. Time intervals are indicated: 90 ~ 120s for the heating phase and 30 ± 10s for the cooling phase.

3	BRASS	SURFACE PLATING : TIN PLATING 1 μ m min			
		UNDER PLATING : NICKEL 1 μ m min			
2	BRASS	SURFACE PLATING : TIN PLATING 1 μ m min	6	POLYESTER	
		UNDER PLATING : NICKEL 1 μ m min	5	POLYSTYRENE	
1	PA	BLACK UL94V-0	4	POLYIMIDE	PICK & PLACE TAPE
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS


UNITS mm		SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-T-00006332	DESIGNED YH. MAMADA	CHECKED HH. TSUKUMO	DATE 20200703
 HIROSE ELECTRIC CO., LTD.		APPROVED :HK. UMEHARA		20190517	DRAWING NO. EDC-379835-00-00			
		CHECKED :OM. MIYAMOTO		20190517	PART NO. ZE05H-24DP-2V			
		DESIGNED :TY. ISHIGURO		20190517	CODE NO. CL752-2316-0-00			
		DRAWN :GYEONGMIN LEE		20190515	 			




Dec.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

PACKING STYLE

PACKING STYLE DRAWING

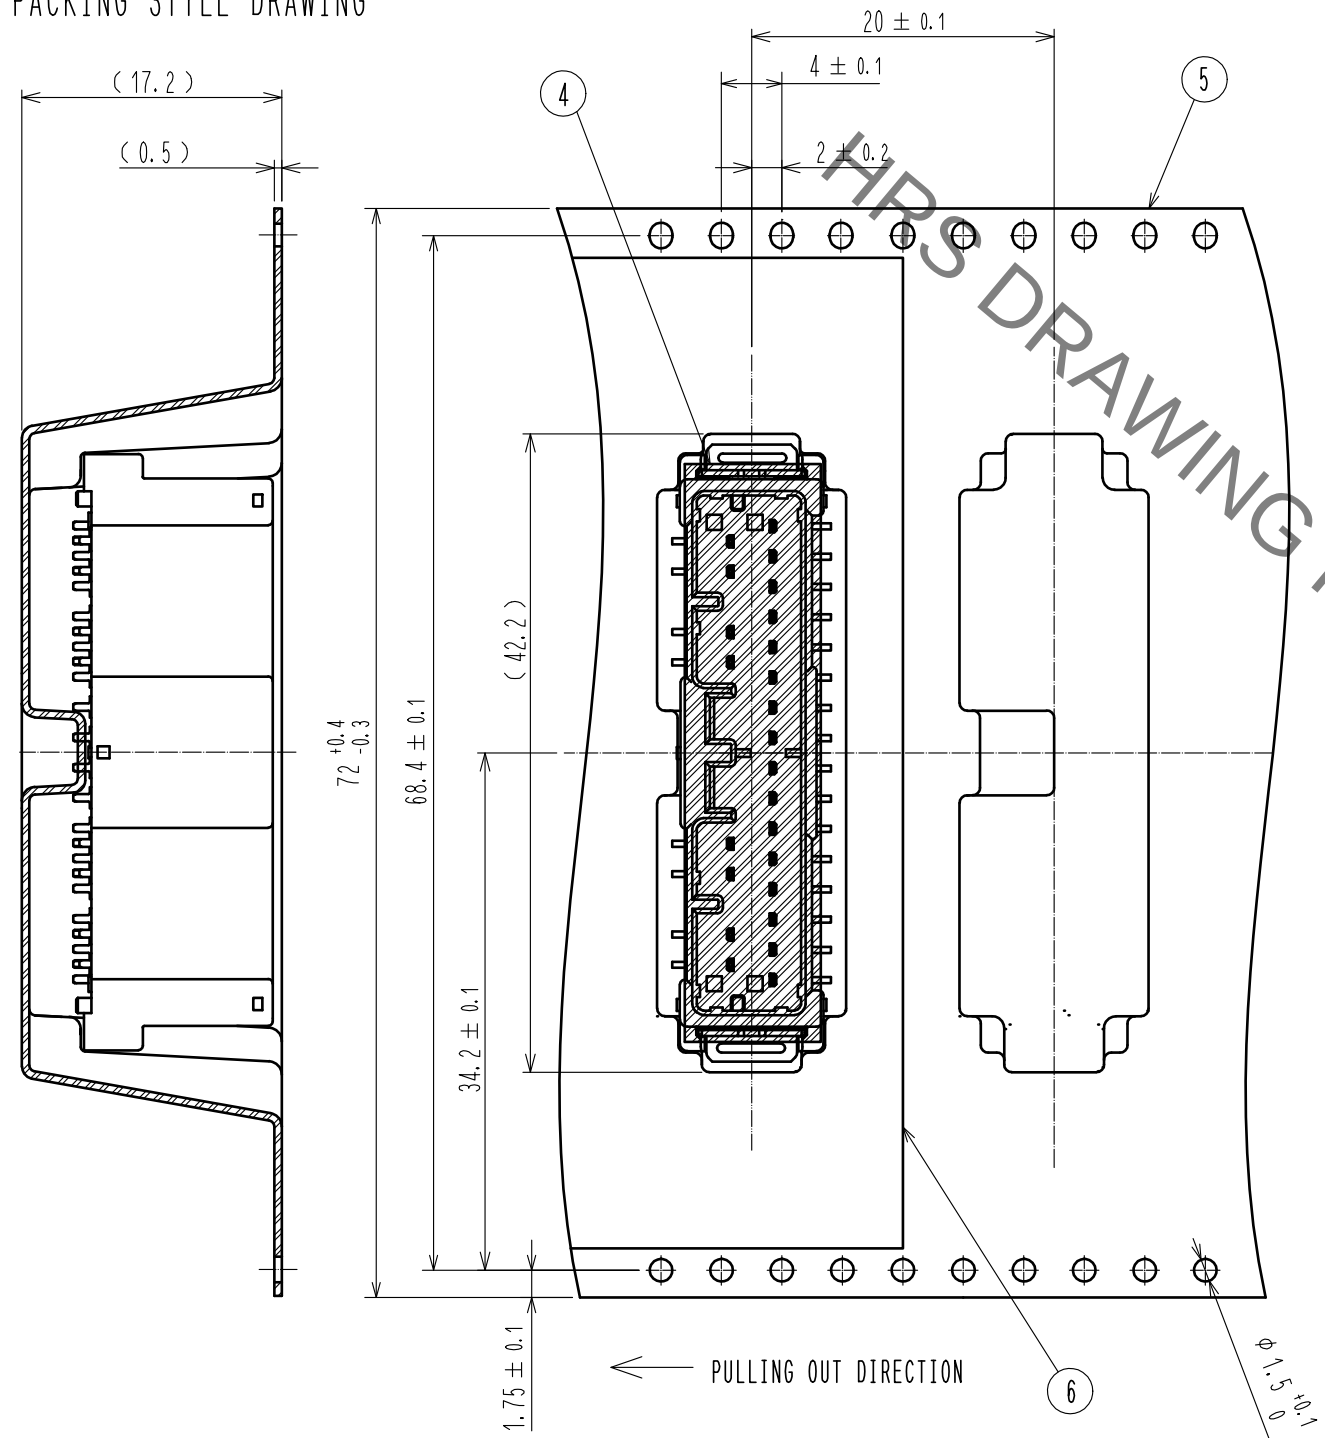


REEL DIMENSION

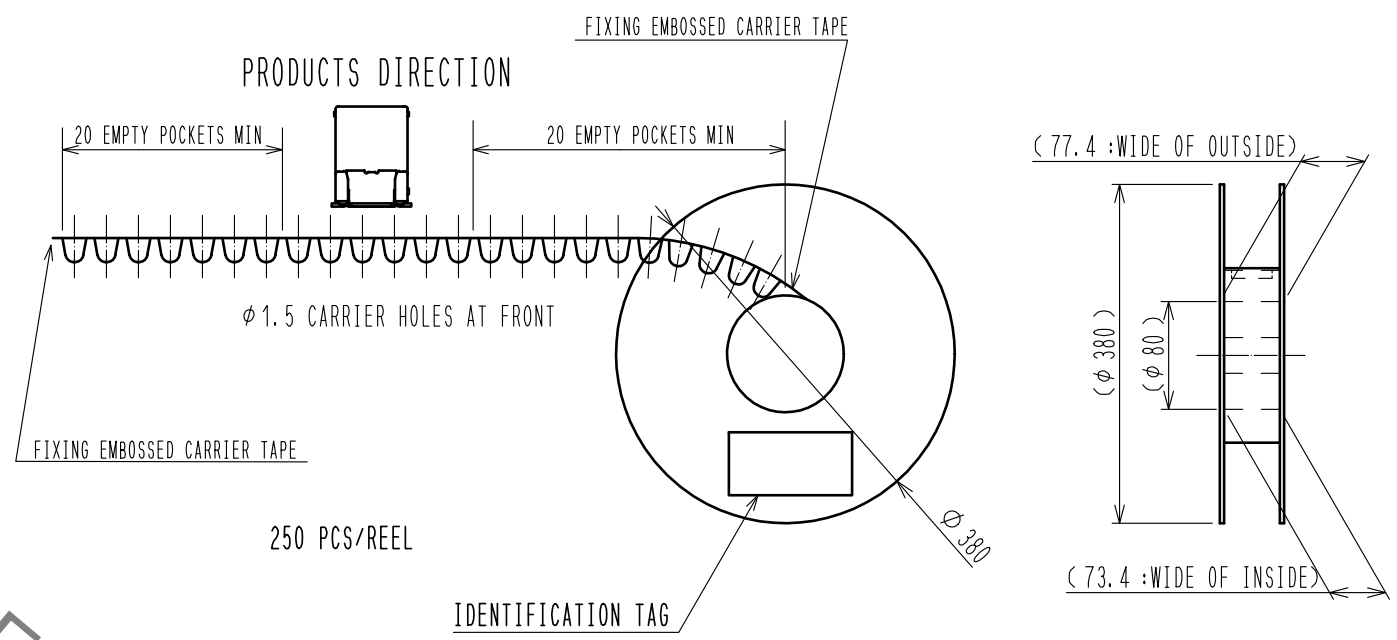

CARDBOARD DIMENSION (FREE)

W=(405) (mm)
D=(405) (mm)
H= (80) (mm)

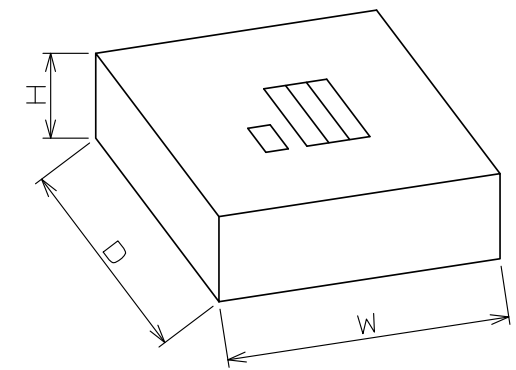

DRAWING NO.	EDC-379835-00-00
PART NO.	ZE05H-24DP-2V
CODE NO.	CL752-2316-0-00

2/2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[ZE05H-24DP-2V](#)