

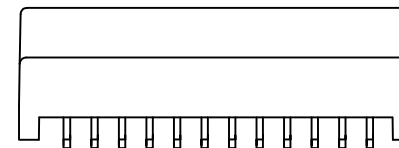


NOTES:

1. ROHS COMPLIANT
2. HEADER: PHENOLIC WITH FLAMMABILITY
RATING UL 94V-0 OR BETTER.
3. STORAGE TEMPERATURE: -50°C TO +125°C
4. COMPLIANCE TO J-STD:
 - A. J-STD-002: SOLDERABILITY AT 245°C REFLOW PROFILE
 - B. J-STD-020: LEVEL 1, NO MOISTURE SENSITIVE
 - C. J-STD-075: R7, 245°C MAXIMUM THROUGH REFLOW SOLDER
5. TO ORDER TAPE & REEL PACKAGING ADD A "T" SUFFIX
TO THE PART NUMBER(i.e HM6098FNL BECOMES HM6098FNLT).

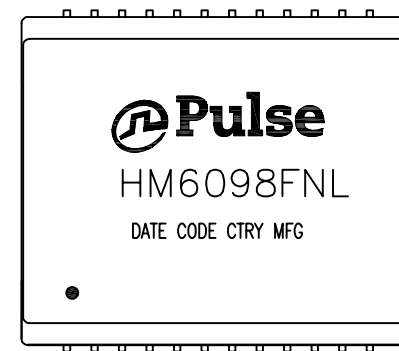

FINAL OUTLINE

© Copyright, 2016. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (09/19/16)

PRODUCT DESCRIPTION
MDL,SIN,1GPP,1:1,SM,TU

TLA DRAWING
HM6098FNL-10


PS DRAWING
PS-2744.001-D

SHEET
1 OF 3


PART NO.
HM6098FNL

DATASHEET REV.
C


CHANNEL A

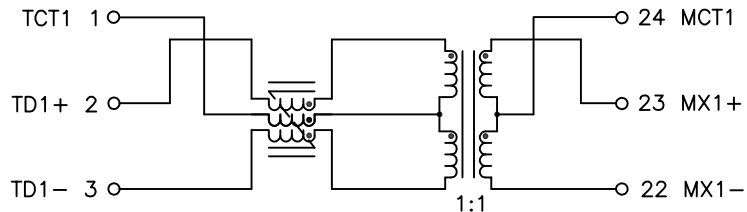


CHANNEL B

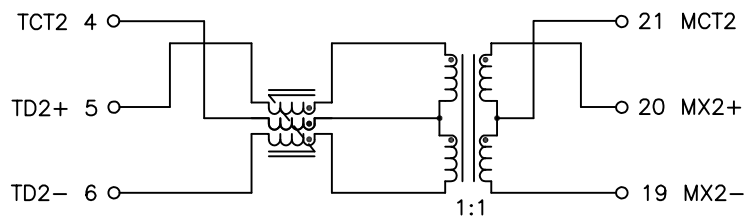

CHANNEL C

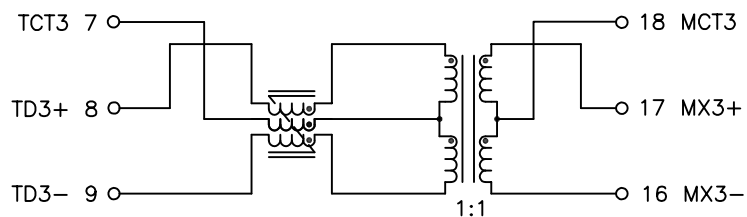

CHANNEL D

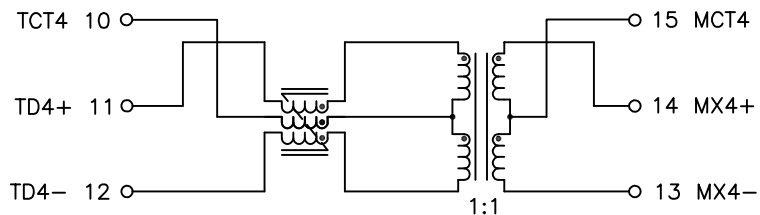

SCHEMATIC

ELECTRICAL CHARACTERISTICS AT +25°C UNLESS OTHER SPECIFIED
MEETS IEEE 802.3 SPECIFICATION

| PARAMETER | SPECIFICATIONS | |
|--|---|--|
| OPERATING TEMPERATURE | -40°C TO +105°C | |
| URNS RATIO | 1.00 ± 2% | |
| INTERWINDING CAPACITANCE (C _{ww}) | 20 pF TYP. @ 1 MHz | |
| LEAKAGE INDUCTANCE (LL) | 250 nH TYP. @ 100 kHz, 100 mV | |
| URNS RATIO | 1.00 ± 2% | |
| INSERTION LOSS | 100 KHz | 1-125 MHz |
| | -1.2 dB MAX | -0.2-0.002*f ^{1.4} dB MAX |
| RETURN LOSS (Z OUT = 100 OHM ±15%) | 1-40 MHz | 40-100 MHz |
| | -16 dB MIN | -10+20*LOG ₁₀ (f/80 MHz) dB MIN |
| INDUCTANCE (OCL) (MEDIA SIDE, -40~+105°C) | 120 uH MIN (MEASURED AT 100 KHz, 100 mVRMS WITH 18 mA DC BIAS) | |
| CROSSTALK, ADJACENT CHANNELS | 1 MHz | 10-100 MHz |
| | -50 dB MIN | -55+22*LOG ₁₀ (f/10) dB MIN |
| COMMON MODE REJECTION RATIO | 2 MHz | 30-200 MHz |
| | -50 dB MIN | -15+20*LOG ₁₀ (f/200) dB MIN |
| DC RESISTANCE, 1/2 WINDING | .30 OHMS TYP. | |
| DC CURRENT/VOLTAGE RATING | 1200 mA @ 57 V (CONTINUOUS) | |
| DC RESISTANCE BALANCE | ±.05 OHMS MAX (CENTER TAP SYMMETRY) | |
| INPUT - OUTPUT ISOLATION | 1500 VRMS MIN @ 60 SECONDS | |

NOTE: f IS FREQUENCY IN MHz.

© Copyright, 2016. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (09/19/16)

PRODUCT DESCRIPTION

MDL,SIN,1GPP,1:1,SM,TU

TLA DRAWING

HM6098FNL-10

PS DRAWING

PS-2744.001-D

SHEET




2 OF 3

PART NO.

HM6098FNL

DATASHEET REV.

C

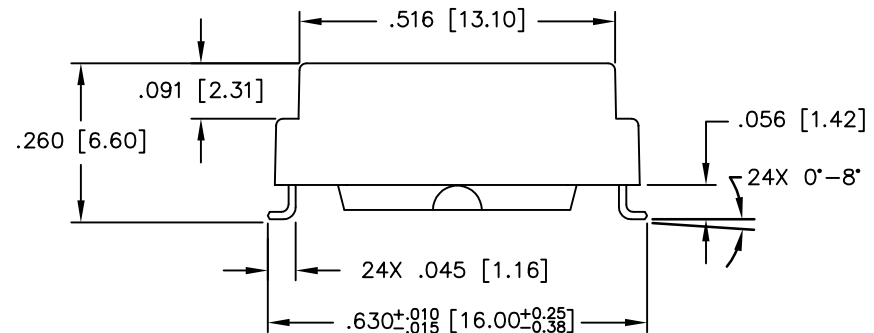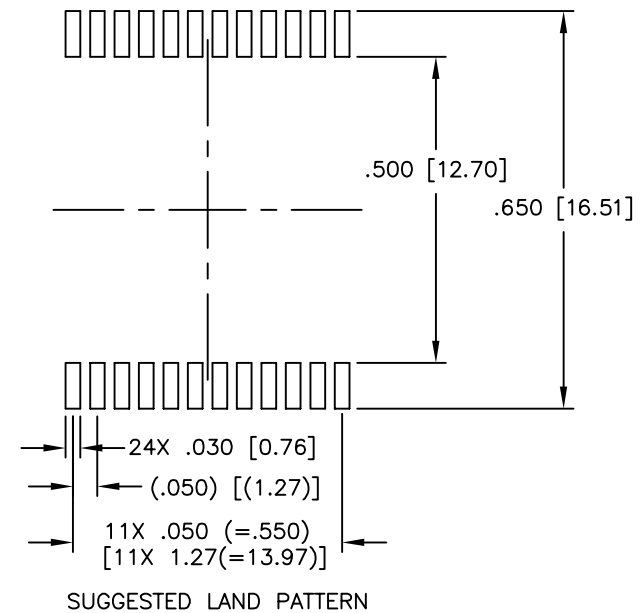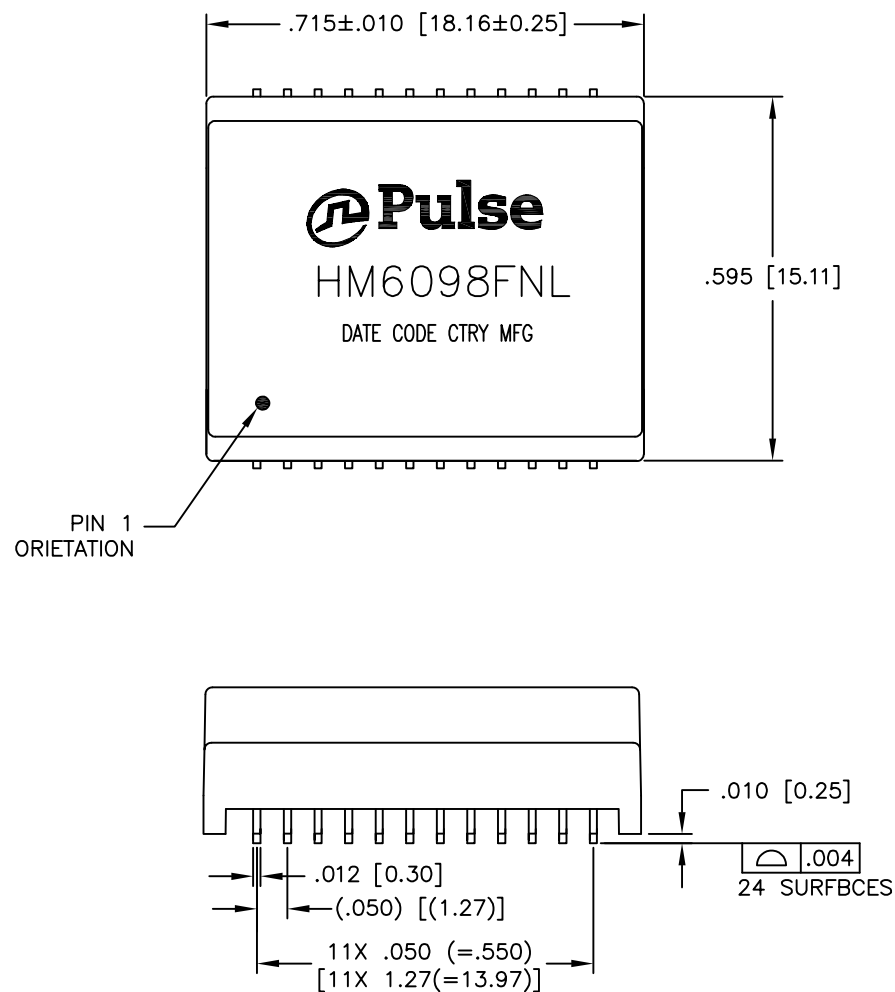

DIMENSIONS ARE IN INCHES [MILLIMETERS] WITH THE FOLLOWING TOLERANCES: [MILLIMETERS] ARE FOR REFERENCE ONLY.
.XX= ±.01 [±0.25]
.XXX= ±.005 [±0.13]

© Copyright, 2016. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (09/19/16)

PRODUCT DESCRIPTION
MDL,SIN,1GPP,1:1,SM,TU

TLA DRAWING
HM6098FNL-10

PS DRAWING
PS-2744.001-D

SHEET
3 OF 3

PART NO.
HM6098FNL

DATASHEET REV.
C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[HM6098FNL](#)