


Potential Transformer Instrument

EX-HX-VT Series



Features

- Used (with 150 Volt full scale A.C. voltmeters) to measure the voltage of 240, 480 or 600 VAC systems.
- Primary insulated for 4.0 KV rms test, suitable for L.V. switchgear and motor control use.
- 50/60 Hz. operation.
- Open construction - "Type H".
- CSA certified (209651).
- The nominal line voltages of 240 and 480 volts may be exceeded by 25% for 60 Hz. operation.
- Insulation system 55 degree C rise, Class 105.

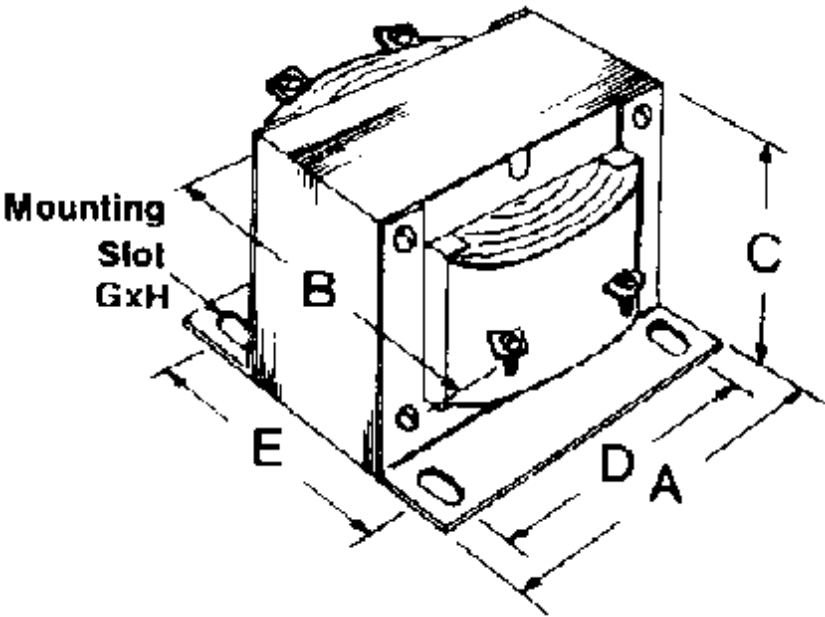

|          | Nominal Line | Ratio       | Accuracy |      | Thermal | Overall Dimensions |      |      | Mounting Centers |      | Mounting Slot |      | Ship Wt. |
|----------|--------------|-------------|----------|------|---------|--------------------|------|------|------------------|------|---------------|------|----------|
| Part No. | Voltage      | Pri. / Sec. | %        | VA   | Rating  | A                  | B    | C    | D                | E    | G             | H    | Lb.      |
| VT55A    | 240          | 240:120     | 1.2      | 0-8  | 50      | 3.00               | 3.25 | 2.56 | 2.50             | 2.50 | 0.22          | 0.44 | 3        |
| HX54A    | 240          | 240:120     | 1.2      | 0-20 | 100     | 3.75               | 4.00 | 3.13 | 3.13             | 3.13 | 0.22          | 0.44 | 6.6      |
| VT56A    | 347          | 347:120     | 1.2      | 0-8  | 50      | 3.00               | 3.25 | 2.56 | 2.50             | 2.50 | 0.22          | 0.44 | 3        |
| VT57A    | 480          | 480:120     | 1.2      | 0-8  | 50      | 3.00               | 3.25 | 2.56 | 2.50             | 2.50 | 0.22          | 0.44 | 3        |
| HX74A    | 480          | 480:120     | 1.2      | 0-20 | 100     | 3.75               | 4.00 | 3.13 | 3.13             | 3.13 | 0.22          | 0.44 | 6.6      |
| VT59A    | 600          | 600:120     | 1.2      | 0-8  | 50      | 3.00               | 3.25 | 2.56 | 2.50             | 2.50 | 0.22          | 0.44 | 3        |
| HX94A    | 600          | 600:120     | 1.2      | 0-20 | 100     | 3.75               | 4.00 | 3.13 | 3.13             | 3.13 | 0.22          | 0.44 | 6.6      |

Data subject to change without notice



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hammond:](#)

[HX94A](#) [VT59A](#) [VT57A](#) [VT55A](#) [HX54A](#) [HX74A](#) [VT56A](#)