













#### Features

- Wide input range 100~305V AC( Class I )
- Full power output at 70~100% Constant power mode operation
- Metal case with IP67, suitable for outdoor application
- Class 2 power unit(except for L type)
- Surge protection with 6KV/4KV
- 3 in 1 dimming function (Dim to off and Isolation design)
- India (EESL) version with Input Over Voltage Protection can survive input voltage stress of 440Vac for 48 hours
- Protection functions: OVP/SCP/OCP/OTP
- Life time >50,000 hrs. and 5 years warranty

# Applications

- Skyscraper lighting
- · Street lighting
- Floodlight Lighting
- Stage lighting
- · Fishing lighting
- · Horticulture lighting
- · Bay lighting
- DMX power supply
- Type HL for use in class I, Division 2


### **■** GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

# Description

XLG-75 series is a 75W LED AC/DC driver featuring the constant power mode.XLG-75 operates from  $100{\sim}305$ VAC and offers models with different rated current ranging between 700mA and 5000mA. Thanks to the high efficiency up to 91%, with the fanless design, the entire series is able to operate for  $40{^\circ}{^\circ}{^\circ}-49{^\circ}{^\circ}{^\circ}$  case temperature under free air convection. The design of metal housing and IP67 ingress protection level allows this series to fit both indoor and outdoor applications. Moreover the innovative environment-adaptive capability allows this series to reliably light on the LEDs for all kinds of application environments in almost any spots that may install LED luminaires in the world. XLG-75 series comply with the latest version of IEC61347/GB7000.1-2015 and UL8750 international safety regulations. The output and dimming circuit are also completely in accordance with the new regulations with isolation to ensure the safety of both user and luminaire system during installation.

# ■ Model Encoding

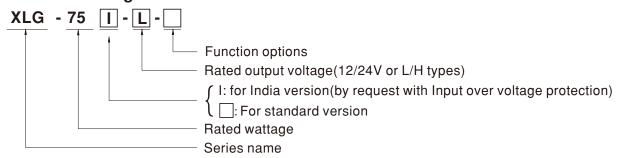

Type	Function	Note		
Blank	lank lo and Vo fixed.(For harsh envirenment)			
Α	lo adjustable via built-in potentiometer	In Stock		
AB	Io adjustable via built-in potentiometer + 3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock		

Note: 1.12V and 24V models without the AB type

2.India version needs MOQ for production, please consult MEANWELL for detail



# 75W Constant Voltage + Constant Current LED Driver XLG-75 series

#### **SPECIFICATION**

TAGE T CURRENT REGION Note.2 CURRENT (Default) DWER A NOISE (max.) Note.3 T ADJ RANGE E TOLERANCE Note.4 GULATION RISE TIME Note.6 P TIME (Typ.) E RANGE Note.5	5A 60W 150mVp-p 2.5A~5A ±3.0% ±0.5% ±2%	24V 16.8~24V 3.1A 74.4W 240mVp-p 1.55A~3.1A ±2.0% ±0.5%					
CURRENT (Default)  DWER  NOISE (max.) Note.3  T ADJ RANGE E TOLERANCE Note.4  GULATION EGULATION RISE TIME Note.6	5A 60W 150mVp-p 2.5A~5A ±3.0% ±0.5% ±2%	3.1A 74.4W 240mVp-p 1.55A~3.1A ±2.0%					
OWER 3 NOISE (max.) Note.3 IT ADJ RANGE E TOLERANCE Note.4 GULATION EGULATION RISE TIME Note.6 P TIME (Typ.)	60W 150mVp-p 2.5A~5A ±3.0% ±0.5% ±2%	74.4W 240mVp-p 1.55A~3.1A ±2.0%					
OWER 3 NOISE (max.) Note.3 IT ADJ RANGE E TOLERANCE Note.4 GULATION EGULATION RISE TIME Note.6 P TIME (Typ.)	60W 150mVp-p 2.5A~5A ±3.0% ±0.5% ±2%	74.4W 240mVp-p 1.55A~3.1A ±2.0%					
MOISE (max.) Note.3 T ADJ RANGE E TOLERANCE Note.4 GULATION EGULATION RISE TIME Note.6 P TIME (Typ.)	150mVp-p 2.5A~5A ±3.0% ±0.5% ±2%	240mVp-p 1.55A~3.1A ±2.0%					
T ADJ RANGE E TOLERANCE Note.4 GULATION EGULATION RISE TIME Note.6 P TIME (Typ.)	2.5A~5A ±3.0% ±0.5% ±2%	1.55A~3.1A ±2.0%					
E TOLERANCE Note.4 GULATION EGULATION RISE TIME Note.6 P TIME (Typ.)	±3.0% ±0.5% ±2%	±2.0%					
GULATION EGULATION RISE TIME Note.6 P TIME (Typ.)	±0.5% ±2%						
EGULATION RISE TIME Note.6 P TIME (Typ.)	±2%	1 +11 5%					
P TIME (Typ.)							
P TIME (Typ.)	500ms 100ms/230VAC 1200ms 100n	±1%					
	0001110, 1001110, 12001110, 10011	500ms, 100ms/230VAC, 1200ms, 100ms/115VAC					
E RANGE Note.5	10ms/ 230VAC 10ms/ 115VAC						
E RANGE Note.5	100 ~ 305VAC 142 ~ 431VDC						
	(Please refer to "STATIC CHARACTERISTIC" section)						
NCY RANGE	47 ~ 63Hz						
FACTOR	$PF \geq 0.97/115VAC, PF \geq 0.95/230VAC, PF \geq 0.92/277VAC@full  load$						
RMONIC DISTORTION							
	THD<10%(@load≧50%/115VC,230VAC; @load≧75%/277VAC)						
NCY (Typ.)	89% 90%						
RENT	1.0A / 115VAC						
CURRENT(Typ.)	COLD START 50A(twidth=300µs measured at 50% Ipeak) at 230VAC; Per NEMA 410						
. of PSUs on 16A BREAKER	9 units (circuit breaker of type B) / 14 units (circuit breaker of type C) at 230VAC						
E CURRENT	<0.75mA / 277VAC						
D	No load power consumption <0 EM	//for standard version)					
CONSUMPTION	No load power consumption <0.5W(for standard version)						
IRRENT	95~108%						
		g, recovers automatically after fault condit					
CIRCUIT	<u> </u>	g, recovers automatically after fault condit	ion is removed				
NITACE	13 ~ 19V	26 ~ 36V					
DLTAGE	Shut down output voltage, re-power or	ı to recover					
/FD //OLTAGE	320 ~ 370VAC (Shut down output voltage when the input voltage exceeds protection voltage, recovers automatically after fault condition is remove						
VER VOLTAGE Note.7	Can survive input voltage stress of 440Vac for 48 hours @ tc 75°C max						
MPERATURE	Shut down output voltage, re-power on to recover						
G TEMP.							
SE TEMP.	Tcase=-40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)						
	Tcase=+90°C						
G HUMIDITY	20 ~ 95% RH non-condensing						
E TEMP., HUMIDITY	-40 ~ +90°C, 10 ~ 95% RH						
DEFFICIENT	±0.03%/°C (0 ~ 60°C)						
ON	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes						
	III 8750(tyne"HI ") III 879 CSA C22 2 No. 250 13.12 ENEC RS EN/EN61347.1 RS EN/EN61347.2.13 independent RS EN/EN62384						
STANDARDS Note.7	GB19510.1, GB19510.14; EAC TP TC 004; J61347-1(H29), J61347-2-13(H29), KC61347-1, KC61347-2-13, IS15885 (Part2/Sec13)						
	(for XLG-75l type only); OM-058-SCFI-2017(except for Blank type);IP67 approved						
AND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC	O/P-FG:1.5KVAC					
JI REGIOTANOE			Took Level/Note				
			Test Level/Note				
	Conducted	1 77					
SSION	Radiated	BS EN/EN55015(CISPR15) ,GB/T1	7743				
i	Harmonic Current	BS EN/EN61000-3-2 ,GB/T17625.1	Class C @load≥50%				
	Voltage Flicker	BS EN/EN61000-3-3					
	BS EN/EN61547						
		Standard	Test Level/Note				
			Level 3, 8KV air ; Level 2, 4KV contact				
EMC IMMUNITY			Level 3				
	EFT/Burst	BS EN/EN61000-4-4	Level 3				
	Surge	BS EN/EN61000-4-5	4KV/Line-Line 6KV/Line-Earth				
	Conducted	BS EN/EN61000-4-6	Level 3				
	Magnetic Field	BS EN/EN61000-4-8	Level 4				
			>95% dip 0.5 periods, 30% dip 25 periods				
	Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% interruptions 250 periods				
	3404.7K hrs min. Telcordia SR-332 //	Bellcore): 276.3Khrs min MII -HDR	K-217F (25°C)				
ON	,	, ,	. ( 0)				
	, ,						
		10500	A				
<ol> <li>All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25℃ of ambient temperature.</li> <li>Please refer to "DRIVING METHODS OF LED MODULE".</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>Tolerance: includes set up tolerance, line regulation and load regulation.</li> <li>De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.</li> <li>Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.</li> <li>Input over voltage only for XLG-75 I series ,and I series without UL/CSA certificate.</li> <li>The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</li> <li>This series meets the typical life expectancy of &gt;50,000 hours of operation when Tcase, particularly (c) point (or TMP, per DLC), is about 75℃ or less.</li> <li>Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com</li> <li>The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500f 12. Products sourced from the Americas regions may not have the PSE/CCC/BIS/KC logo. Please contact your MEAN WELL sales for more information.</li> </ol>							
O C G a	N RESISTANCE  SION  UNITY  meters NOT specially refer to "DRIVING M& noise are measure ce: includes set up to ce:	NRESISTANCE  I/P-O/P, I/P-FG, O/P-FG:100M Ohms /  Parameter  Conducted  Radiated  Harmonic Current  Voltage Flicker  BS EN/EN61547  Parameter  ESD  Radiated  EFT/Burst  Surge  Conducted  Magnetic Field  Voltage Dips and Interruptions  3404.7K hrs min. Telcordia SR-332 (to 140*63*32mm (L*W*H)  0.58Kg;24pcs/15Kg /0.85CUFT  meters NOT specially mentioned are measured at 230VAC i refer to "DRIVING METHODS OF LED MODULE".  & noise are measured at 20MHz of bandwidth by using a 12' ce: includes set up tolerance, line regulation and load regulaging may be needed under low input voltages. Please refer to "					

For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED\_EN.pdf
 If you need the NOM (Mexico) certificate, Please contact MEAN WELL sales representative for details.

X Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx

File Name:XLG-75-SPEC 2022-08-08



#### **SPECIFICATION**

IODEL		XLG-75L	XLG-75 □-H	- 🗌			
	RATED CURRENT (Default)	700mA	1400mA				
	RATED POWER	74.9W	75.6W				
	CONSTANT CURRENT REGION	53 ~ 107V	27 ~ 56V				
	FULL POWER CURRENT RANGE	700~1050mA	1300~2100m.	Α			
UTPUT	OPEN CIRCUIT VOLTAGE (max.)	115V 60V					
	CURRENT ADJ. RANGE	350~1050mA 650~2100mA					
	CURRENT RIPPLE	3.0%(@rated current)					
	CURRENT TOLERANCE	±5%					
	SET UP TIME	± 576 500ms/230VAC, 1200ms/115VAC					
		100 ~ 305VAC 142VDC ~ 431VDC					
	VOLTAGE RANGE Note.5	(Please refer to "STATIC CHARACTERISTIC" and "DRIVING METHODS OF LED MODULE"section)					
	FREQUENCY RANGE	47 ~ 63Hz					
	THE QUENTY TO THOSE	PF $\ge$ 0.97 / 115VAC, PF $\ge$ 0.95 / 230VAC, PF $\ge$ 0.92 / 277VAC at full load					
	POWER FACTOR (Typ.)	PF \( \brace 0.97 / 115 \rangle AC, \rangle PF \( \brace 0.92 / 21 \rangle AC \text{ at full load} \)     (Please refer to "Power Factor Characteristic" section)					
	TOTAL HARMONIC DISTORTION	THD< 10% (@ load ≥ 50% at 115VAC/230VAC ,@load ≥ 75% at 277VAC)  Please refer to "TOTAL HARMONIC DISTORTION (THD)" section					
NDUT	EEEICIENCV (Tup.)						
NPUT	EFFICIENCY (Typ.)	91% 90%					
	AC CURRENT (Typ.)	1A / 115VAC					
	INRUSH CURRENT(Typ.)	COLD START SUA(twidth=SUUµs Theasured a	it 50% ipeak) at 250VAC, Pel NEIVIA 4	10			
	MAX. NO. of PSUs on 16A	9 unit(circuit breaker of type B) / 14 units(circuit breaker of type C) at 230VAC					
	CIRCUIT BREAKER	10.75 - 1.077\/10.0					
	LEAKAGE CURRENT	<0.75mA / 277VAC					
	STANDBY	Standby power consumption <0.5W for	or AB-Type(Dimming OFF)(for s	tandard version)			
	POWER CONSUMPTION						
	OVER POWER	110 ~ 150%					
	OVERT OWER	Hiccup mode, recovers automatically after fault condition is removed					
ROTECTION	SHORT CIRCUIT	Hiccup mode or Constant current limiting, recovers automatically after fault condition is removed					
	INPUT OVER VOLTAGE Note.7	320 ~ 370VAC (Shut down output voltage when the input voltage exceeds protection voltage, recovers automatically after fault condition is removed					
		Can survive input voltage stress of 440Vac for 48 hours @ tc 75°C max					
	OVER TEMPERATURE	Shut down output voltage, re-power on to recovery					
	WORKING TEMP.	Tcase=-40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)					
	MAX. CASE TEMP.	Tcase=+90°C					
ENVIRONMENT	WORKING HUMIDITY	20 ~ 95% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH non-condensing					
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 60°C)					
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes					
	SAFETY STANDARDS Note.7	UL8750(type"HL"), CSA C22.2 No. 250.13-12; ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384;					
		GB19510.1, GB19510.14; EAC TP TC 004;J61347-1(H29), J61347-2-13(H29), KC61347-1, KC61347-2-13, IS15885(Part2/Sec13)					
		(for XLG-75I type only); NOM-058-SCFI-2017(except for Blank type);IP67 approved					
AFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC					
MC	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 50					
LMO		Parameter	Standard	Test Level/Note			
	EMC EMISSION	Conducted	BS EN/EN55015(CISPR15),GB				
		Radiated	BS EN/EN55015(CISPR15), GB	/T17743			
-		Harmonic Current	BS EN/EN61000-3-2 ,GB/T1762	5.1 Class C @load≥50%			
		Voltage Flicker	BS EN/EN61000-3-3				
	EMC IMMUNITY	BS EN/EN61547					
		Parameter	Standard	Test Level/Note			
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact			
		Radiated	BS EN/EN61000-4-3	Level 3			
		EFT/Burst	BS EN/EN61000-4-4	Level 3			
		Surge	BS EN/EN61000-4-5	4KV/Line-Line 6KV/Line-Earth			
		Conducted	BS EN/EN61000-4-6	Level 3			
		Magnetic Field	BS EN/EN61000-4-8	Level 4			
		Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods >95% interruptions 250 periods			
	MTBF	3404 7K hrs min Toloordia SD 222 /Pol	Icore): 276 3Khromin MII L				
OTHERS	DIMENSION	3404.7K hrs min. Telcordia SR-332 (Bellcore); 276.3Khrs min. MIL-HDBK-217F (25°C)					
	DIMENSION	140*63*32mm (L*W*H)					
IHEK5	PACKING	0.58Kg;24pcs /15Kg /0.85CUFT					

- 3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.

  4. Tolerance: includes set up tolerance, line regulation and load regulation.

  5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.

  6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.

  7. Input over voltage only for XLG-75 I series and I series without UL/CSA certificate.

  8. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the

- s. The driver is considered as a component that will be operated in commination with linial equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

  9. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (c) point (or TMP, per DLC), is about 75°C or less.

  10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com

  11. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).

  12. Products sourced from the Americas regions may not have the PSE/CCC/BIS/KC logo. Please contact your MEAN WELL sales for more information.


  13. To fullfill requirements of the latest ErP regulation for lighting fixtures, this LED drivers can only be used behind a switch without permanently connected to the major.

- to the mains 14. For any application note and IP water proof function installation caution, please refer our user manual before using.
- https://www.meanwell.com/Upload/PDF/LED\_EN.pdf
  15. If you need the NOM (Mexico) certificate, Please contact MEAN WELL sales representative for details.
- ※ Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx



#### ■ BLOCK DIAGRAM


PFC fosc: 50~120KHz PWM fosc: 65KHz

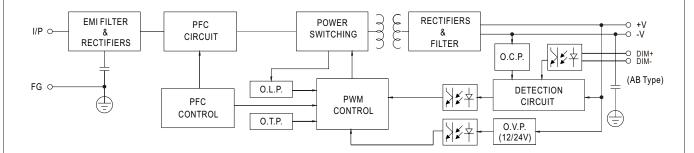

#### ■ DRIVING METHODS OF LED MODULE


#### **%** I-V Operating Area

#### 

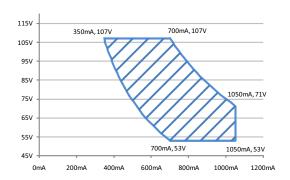

Recommend Performance Region


#### 

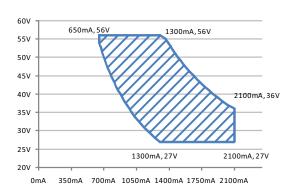

Recommend Performance Region

### **◯ XLG-75-12,24**

This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.



 In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please please contact MEAN WELL.

Typical output current normalized by rated current (%)




#### **■ DIMMING OPERATION**




#### ※ 3 in 1 dimming function (for AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
   0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100  $\mu$  A (typ.)

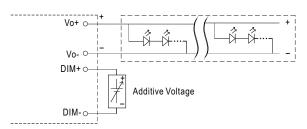


"DO NOT connect "DIM- to Vo-"

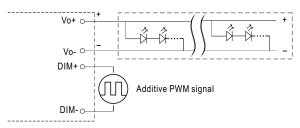



"DO NOT connect "DIM- to Vo-"


Applying additive resistance:

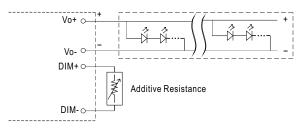

"DO NOT connect "DIM- to Vo-"









Note: 1. Min. dimming level is about 8% and the output current is not defined when 0% < Iout < 8%.

2. The output current could drop down to 0% when dimming input is about  $0\Omega$  or 0Vdc, or 10V PWM signal with 0% duty cycle.



#### ■ OUTPUT LOAD vs TEMPERATURE

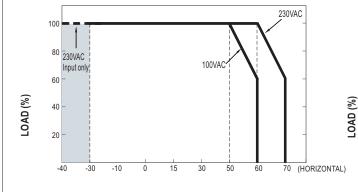

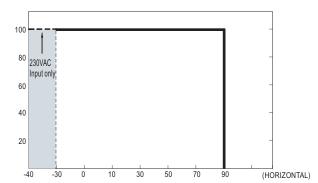


Tcase (°C)

#### AMBIENT TEMPERATURE, Ta (°C)

If XLG-75 operates in Constant Current mode with the rated current the maximum workable Ta is 60°C (Typ. 230VAC) or 50°C (Typ.100VAC) Below 110VAC@ -30° C may retry to 2nd setup

#### ■ STATIC CHARACTERISTIC

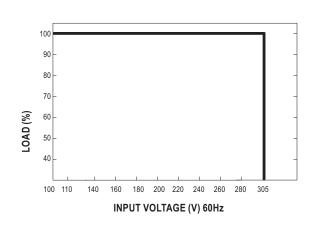


# ■ POWER FACTOR (PF) CHARACTERISTIC

※ Tcase at 75°


C

#### **Constant Current Mode**

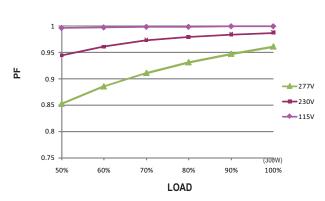

# ■ TOTAL HARMONIC DISTORTION (THD)


#### ※ XLG-75-L Model. Tcase at 75°C

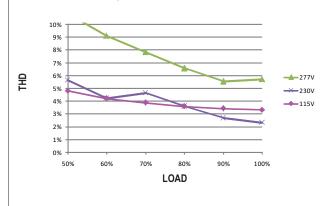

#### **■** EFFICIENCY vs LOAD


XLG-75 series possess superior working efficiency that up to 92% can be reached in field applications.

※ XLG-75-L Model. Tcase at 75°C

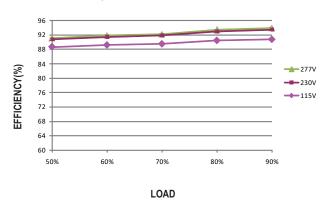




# ■ LIFE TIME

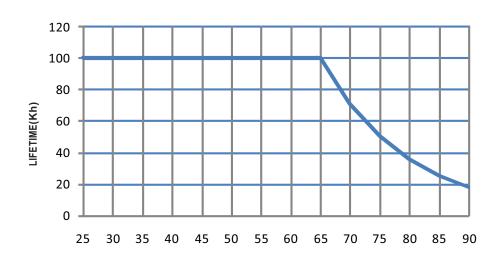

Tcase (  $^{\circ}\!\mathbb{C}$  )



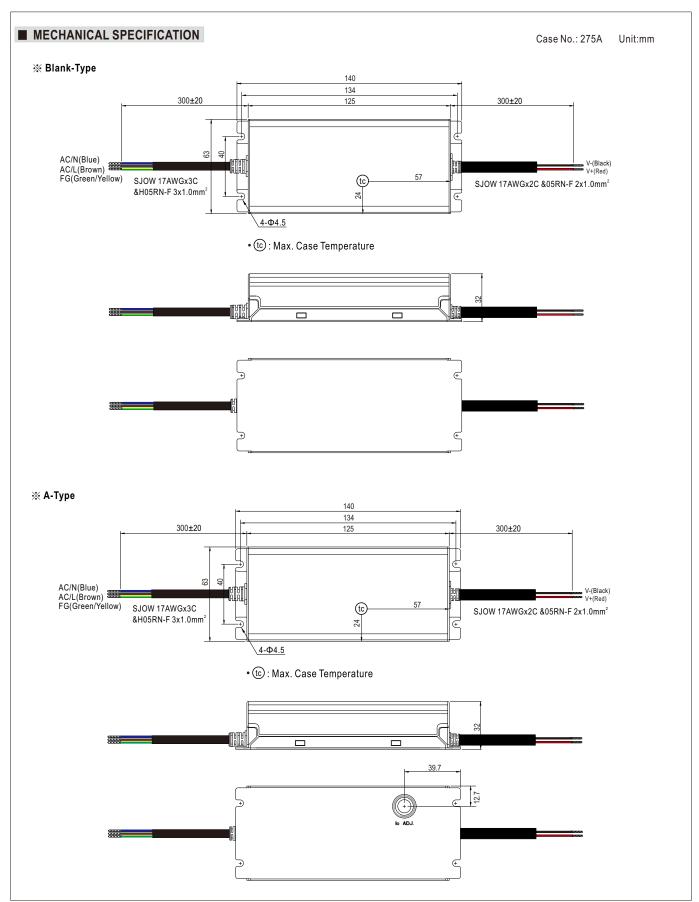


Unit:mm

Case No.: 275A




# ■ MECHANICAL SPECIFICATION

# ※ AB-Type

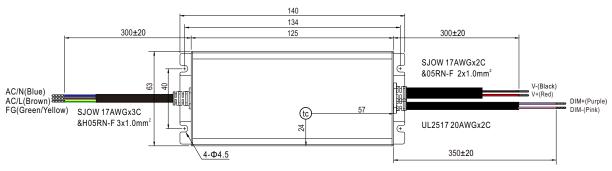

• tc : Max. Case Temperature

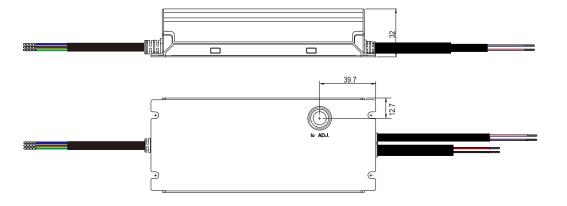

# **■ INSTALLATION MANUAL**

Please refer to : http://www.meanwell.com/manual.html